Sorensen Power Supplies Full Line Catalog

1983

40th anniversary edition

1943

Jay Stone
& Associates
339 South
San Antonio Rd.
Los Altos,
California 94022
(415) 948-4563

RAYTHEON

SORENSEN
POWER SUPPLIES

Sorensen Power Supplies

Full Line Catalog

SORENSEN Sorensen Company, 676 Island Pond Road, Manchester, NH 03103 USA (603) 668-4500 TWX 710-220-1339
RAYTHEON

Sorensen Company

RAYTHEON

History

Founded in 1943 to develop and produce specialty transformers and 400 Hz regulators for airborne use, Sorensen was the first commercial firm to manufacture and market precision electronic voltage regulators and power supplies.

Development of the basic Sorensen regulating circuitry for 60 Hz ac voltage regulators logically led to the design of related devices. This simple, reliable control circuitry was first adapted for a line of low-voltage, high-current dc power supplies. As engineering experience broadened and deepened, a line of high-voltage, low-current B-supplies was developed. With this framework of basic ac and dc supplies established, the company continued its pattern of research, development, diversification and expansion. A profusion of diversified, but related, products followed. Military and commercial inverters and frequency changers (variable frequency power sources), tubeless magnetic amplifier-controlled dc power supplies and ac line voltage regulators, transistorized converters, inverters, and ac to dc power supplies, a broad line of high-voltage equipment — all contributing to and substantiating the complete Sorensen line.

In 1959 Raytheon Company acquired Sorensen. In 1970 all manufacturing facilities were moved from Norwalk, Connecticut to a 160,000 sq. ft. plant in Manchester, New Hampshire. In addition there is a 40,000 sq. ft. shipping warehouse in nearby Londonderry, New Hampshire.

Over the years, Sorensen has supplemented standard product lines with custom developments to satisfy unique regulating problems, such as those inherent in large, complex computer systems and in stringent military applications. In these areas, Sorensen has been a pioneer and a continuing leader in the application of new components and manufacturing techniques. The company has acquired substantial experience with the most sophisticated semiconductors, printed circuitry, miniaturization problems, encapsulation, and high temperature techniques.

Capabilities

Today, all phases of electronic and semiconductor art are applied in achieving optimum performance and maximum life in Sorensen-engineered equipment.

This diversity of engineering approach and capability enables the company to channel its aggregate ability and experience according to the customer's needs. The product line consists of several series and many models of power supply units. The series range from laboratory and industrial power supplies to digital-to-analog interface units and modular switching power supplies.

Facilities

Complete facilities are maintained for manufacturing and finishing transformers, chokes, and reactors. A fully equipped finishing department routinely satisfies rigid commercial requirements.

Elaborate test facilities provide thorough testing of components and completed units. All electrical, mechanical, physical and environmental tests are performed on the premises.

As an entirely separate function, on a management level with engineering, production, finance and marketing, the quality assurance department implements a comprehensive program, beginning with the earliest design stage and following through to the final assurance of customer satisfaction. This total quality assurance concept is actually maintained by four major activities: (1) new design control, to review engineering specifications on each new or redesigned catalog product; (2) incoming material control, employing the most thorough quality control methods; (3) product control, to maintain superior quality levels in the manufacturing areas; (4) customer service, to maximize product satisfaction.

Controlled Process Meets Requirements of MIL-1-45208A Inspection Systems

MIL-1-45208 is a specification which established the inspections and tests necessary to substantiate product conformance to drawings, performance specifications, and contractual requirements.

Sorensen products are manufactured in a controlled process which meets the requirements of MIL-1-45208A inspection systems. With the increasing purchasing possibilities in the defense industry, this may be a factor you can use to advantage in marketing your products which contain Sorensen power supplies.

Complete Engineering Assistance

Although Sorensen offers a comprehensive line of standard "off the shelf" power sources, the engineering department is always pleased to discuss special power supply problems, fully integrated power systems, or modifications to standard units for special requirements.

Sorensen Catalog Contents

Section Pages

Sorensen Power Supply Engineering Information 1.1-1.15

Glossary of Terms 1.16

Warranty, 5 Year and 2 Year coverage 2.1

MODULAR POWER SUPPLIES SECTION

Selection Chart 2.2-2.3
SSD Series, High Power, Switching Power Supplies 3.1-3.4
STM Series, High Efficiency, Switching Power Supplies 3.5-3.8
SLC-B Series, Dual ac Input, Switching Power Supplies 3.9-3.12
SLT5/SLT0 Series, Low Power, Triple Output Switching Power Supplies 3.13-3.16
SRX Series, High Power Density (2.47 W per cu. in.), Switching Power Supply 3.17-3.20
SRM Series, Open Frame, Multi-Output Switching Power Supplies 3.21-3.24
PTM Series, Single and Dual Output, Linear Power Supplies 3.25-3.28
QSA Series, Wide Range Adjustable Output, Linear Power Supplies 3.29-3.32
MM Series, PC Board Mounting, Miniature Encapsulated Linear Power Supplies 3.33-3.36
CM Series, Chassis Mounting, Miniatue Encapsulated Linear Power Supplies 3.37-3.38

POWER ASSEMBLIES SECTION

Features and Options 4.1-4.2
Selection Chart/Specifications, Single Output Series (SSD, STM, PTM) 4.3-4.4
Selection Chart/Specifications, Dual and Wide Range Adjustable Ouput (PTM and QSA) 4.5
Standard Rack Sizes 4.6
System 319, (3.5" x 19" x 19.4") with various front panel options 4.7
System 519, (5.25" x 19" x 19.4") with various front panel options 4.8-4.9
System 522, (5.25" x 19" x 22.4") with various front panel options 4.10-4.11
Accessories 4.12
Rack Sub-Assemblies 4.13-4.14

POWER INSTRUMENTS SECTION

Selection Chart 2.4
SRL Series, Medium Power, Variable Programming Laboratory and Industrial Power Supplies 5.1-5.4
DCRB Series, High Power, Single Phase Input Laboratory and Industrial Power Supplies 5.5-5.10
DCRA Series, High Power, Three Phase Input Laboratory and Industrial Power Supplies 5.11-5.17
DCRA Series, Optional Equipment (ST101, RP9 Kit, CSE Kit) 5.18
QRD Series, Bench, Lab, Test and System High Speed Programmable Power Supplies 5.19-5.21
QRD Series Rack Mounting Accessories and Optional Equipment 5.22
QRL Series, High Speed Programmable, Dual Output Lab & Industrial, Linear Power Supplies 5.23-5.26
OVP Models Overvoltage Protectors for QSA and QRD Series 5.27-5.28
ACR Series, Solid State ac Line Regulator 5.29-5.32
ACR 500 Series, Rack Mounting Adapter, RP7 ..... 5.30

DIGITAL-TO-ANALOG PROGRAMMERS SECTION

488 DAP Series, Two Channel, Programmer, Interfaces to GPIB Bus per IEEE/488 ..... 6.1-6.4
RA500 Series Power Assembly (488 DAP) 6.4

General Ordering Information 7.1

Power Supply Information Request Form 7.3
Sales & Service Representatives 7.5-7.10
Price Lists .....

SORENSEN
RAYTHEON
Sorensen Company, 676 Island Pond Road, Manchester, NH 03103 USA (603) 668-4500 TWX 710-220-1339

Introduction

The term "power supply" may, depending upon one's discipline, have a very specific meaning. For example, to an astronaut, a power supply is a fuel cell. Automotive engineers may consider a storage battery as a power supply. Power-distribution engineers may think of a turbine/generator combination as a power supply. Indeed the definitions of "power supply" are as many and varied as the number and types of disciplines in which they are used.

However, to laboratory workers, computer and system designers, original-equipment manufacturers, and many others "power supply" has a singular definition: it is an electronic device that accepts an electrical input and conditions it to a usable form.

Included within the broad framework of this definition are ac-to-ac converters and dc-to-dc inverters. These notwithstanding, however, the most common electronic power supply is the ac-to-dc supply, the simplest form of which is the unregulated supply (Figure 1).

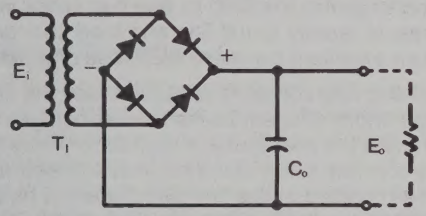

Figure 1. Unregulated Power Supply

Quite obviously, an unregulated supply has very limited capabilities and therefore limited uses. Chief among its drawbacks is its reaction to load changes: both the output current and voltage will assume new values for a change in load level. Clearly, this is in most cases unacceptable. What is normally required for many loads is a constant voltage, independent of current changes. Or, in other words, a supply that

exhibits zero output impedance, $\frac{\Delta E}{\Delta I} = \frac{0}{i} = 0$

This is, in essence, what is meant by ideal regulation.

As would be expected, ideal regulation is not practically achievable except by expensive compensation techniques. Attempts at obtaining a constant voltage independent of line and load changes have been and continue to be quite numerous. Many were developed and applied by Sorensen in the years since 1943. However, through a process of distillation, optimization and reliance on experience, coupled with a willingness to adopt technological advances, four basic types of supply may presently be found in Sorensen's broad line. These are: series-pass, series-pass with preregulation, high-frequency switching (HFS), and phase control.

Series Pass

The simplest yet usually most effective regulation technique for low-power requirements is series pass. Implementation of this technique involves comparison of the output with a fixed reference. The comparison errors which develop are differentially amplified, and the resultant signals are fed back to an error-sensitive, dissipative control element. This control element absorbs the difference between the "raw" output of the unregulated supply and the voltage across the load. Figure 2 illustrates the basic series-pass configuration. Note that the unregulated supply of Figure 1 is simply appended by the control element (power transistor) and the comparison network. Note too that the output voltage, although regulated, is fixed since there is no means of adjustment. Control may be achieved quite simply by changing R_3 from a fixed resistor to one that is variable. A supply with this modification and in the configuration illustrated is known as a "slot" supply inasmuch as the output voltage adjustment is restricted to a narrow range or slot. The presence of a shunt-connected, zener-type regulating diode precludes control to zero, i.e., the minimum voltage of the slot supply must be at least the reverse breakdown voltage of the zener.

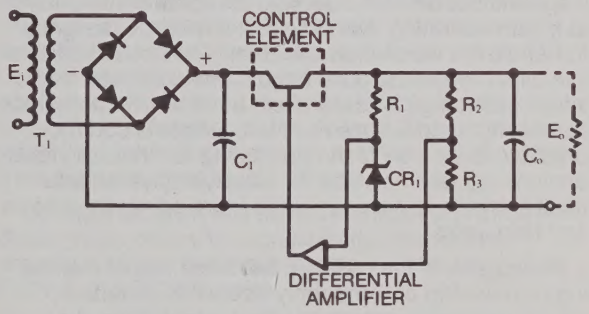

Figure 2. Basic Series-Pass Configuration - Constant Voltage

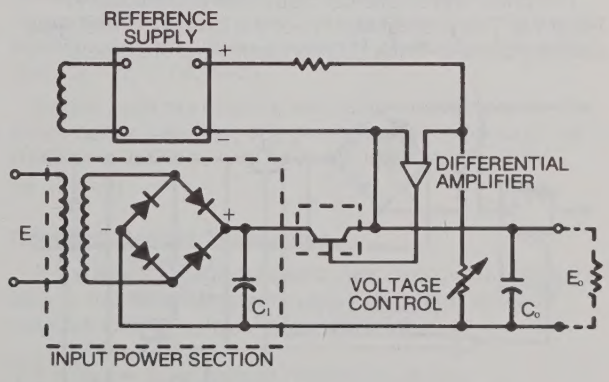

Figure 3. Series-Pass Ranger - Constant Voltage

The "slot" supply finds wide usage among original-equipment manufacturers. The PTM, QSA, MM and CM series are all "slot" type power supplies. However, laboratory and system users find the inability to control to zero unacceptable. To obtain control down to zero, the reference is usually made independent of the output by utilizing a fixed, highly regulated negative source as shown in Figure 3. This is the basic configuration of all Sorensen series-pass "Rangers" such as QRD and QRL series. The reference supply itself is a series-pass type which is very similar to the fixed-voltage supply of Figure 2.

This then completes the discussion of the series-pass technique as it applies to constant-voltage supplies. Further additions to the basic circuit yield overcurrent, overvoltage and current-regulating features. These will come under consideration in later sections.

Series Pass with Preregulation

As mentioned previously, the series-pass regulator is an excellent performer in low-power applications. However, it becomes less and less practical as attempts are made to design power supplies with higher output power (>200 watts.) It should be evident that, depending upon load requirements, the passing stage will not be called upon to dissipate continuously at maximum rating. Nonetheless, it must be designed to handle the worst-case situation. The unused dissipative capacity can be quite large if one considers that a single pass stage is rarely used, but that a technique of paralleling up to a dozen or more stages is common practice. Extension of the paralleling techniques yields diminishing returns since the supply's physical size must increase to accommodate more power transistors and heat sinks.

Stated simply the problem becomes one of maintaining or reducing power supply size while simultaneously increasing power-handling capabilities. As a solution, Sorensen selected a preregulated series pass design for its high-performance SRL "Ranger" series.

The basic schematic configuration is depicted in Figure 4. The preregulator is of the phase-control type utilizing back-to-back Silicon Controlled Rectifiers (SCR's) on the input transformer's primary. The preregulator serves to maintain the pass-stage voltage at a low constant magnitude. Hence, pass-stage dissipation is the product of the load current and the regulated Vc-e rather than a function of the output voltage as is the case in the simple series-pass regulator. In essence, the preregulator varies the input-transformer secondary voltage in response to manually or remotely programmed output voltage changes and, to some degree, to line and load changes.

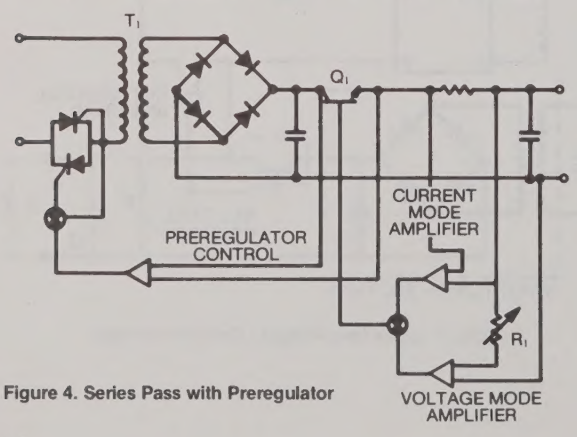

Figure 4. Series Pass with Preregulator

As an example of preregulator operation, assume that potentiometer R_1, Figure 4 is adjusted to produce a lower output voltage. The voltage-mode control section, in response to programmed change, drives Q_1 toward cut-off. The preregulator amplifier senses the voltage across the pass stage and responds by delaying the SCR firing signal. Delayed firing reduces the secondary voltage at T_1, and, consequently, pass-stage Vc-e, the difference between the secondary and output voltages, is maintained at a constant level.

The preregulator functions in a similar fashion to provide line and load regulation. The series-pass stage, in addition to giving the SRL its fine regulation characteristic, reacts rapidly to full line and load changes to produce an excellent transient-response characteristic.

With a relatively constant voltage across the series-pass stage, more efficient use is made of stage capacity, and hence the preregulator approach yields a four or five-to-one reduction in series-pass transistors. The results are reflected in the fine performance, high power, and low volume characteristics of the SRL (see Power Instruments section for a complete listing of SRL specifications).

High Frequency Switching (HFS) Regulation

In an era that has seen quantum reductions in the size of electronic devices, commercial power supplies have shown little inclination to follow industry trends. In addition, being basically dissipative regulators, they waste enormous amounts of energy in the form of heat. Sorensen, recognizes the theoretical limitations in conventional regulators, has advanced the art through the development of high-frequency switching (HFS) regulation techniques. the results of its efforts is the SRX line. A basic functional block diagram is illustrated in Figure 5.

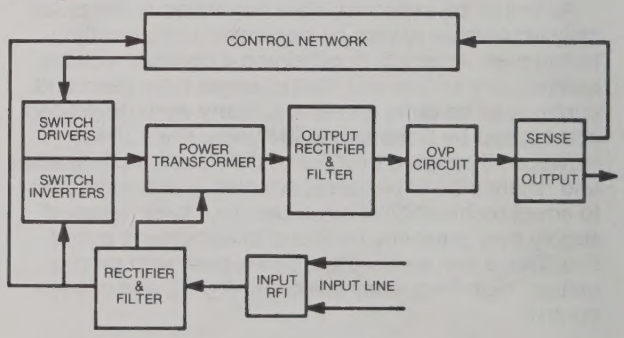

Figure 5. Basic HFS System Operation

In the SRX, the ac line is filtered, rectified, and then inverted at a 20-kHz rate. Inverter output is transformed down, rectified, and filtered to produce a dc output. Regulation is achieved through a feedback network which modulates the inverter duty cycle in response to output-voltage perturbations.

Due to the use of high-frequency switching techniques, magnetic and capacitive components within the SRX are physically much smaller than those utilized in conventional regulators. In addition, the switches are basically non-dissipative, being either fully conductive or nonconductive. Hence, the efficiency realized far exceeds that of conventional devices. The result is a small power supply with, on a watt-per-watt basis, less heat loss. The combination of smaller size, higher efficiency and little premium in cost makes the SRX an attractive alternate to series-pass "slot" supplies. The SSD, STM, SLT and SLC series use similar 20kHz techniques.

The high frequency switching generates noise spikes which appear on the output. These spikes exceed the normal ripple (typically 20 - 100mV spikes are present) and must be considered in critical applications.

Phase-Control Regulation

The series-pass with preregulation technique yields a power supply that can be applied to medium-power loads, provides fine regulation, is economical both from the standpoint of initial cost and cost of operation, and is compact. However, like its companion technique, series pass, it too becomes impractical when applied to high-power supplies. In addition, many of its operating characteristics are overqualified for the commonly encountered high-power loads, i.e., the buyer pays for characteristics which are not required.

To handle high-power loads, Sorensen developed phase-control regulation and produced its popular line of DCR supplies. With phase control, no dissipation elements are used but a form of switching similar to the preregulator principle is applied. Just as in the case of the SRL series, a pair of silicon-controlled rectifiers are employed for each input phase.

The SCR is a device well suited for power-supply applications. It can pass high currents, block high voltage and is controllable by external signal. When forward biased, it acts as an open circuit until a signal is applied to its "gate." It then switches rapidly into a conductive state and remains "on" until either the forward bias is removed or reverse bias is applied.

Sorensen made full use of these characteristics by employing a pair of back-to-back SCR's on the primary side of the input transformer (Figure 6). The input voltage alternately forward and reverse biases one SCR and then the other. By utilizing a suitable triggering or "gate" signal network the SCR's pass a modulated or "chopped" portion of the input voltage. This voltage is transformed, rectified, filtered and then applied to the output terminals.

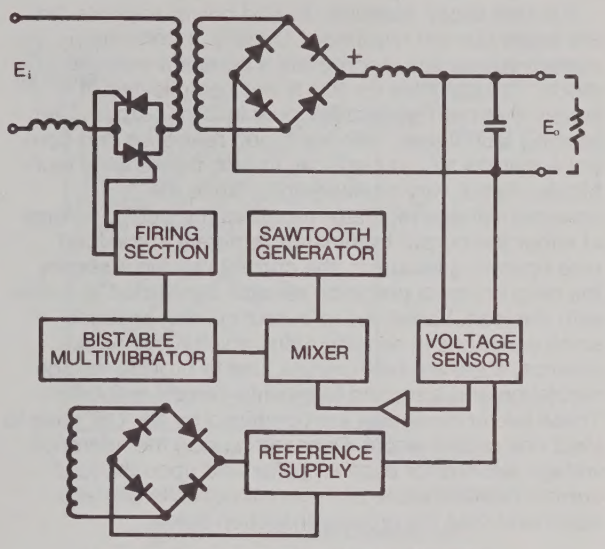

Figure 6. Typical Phase-Control Configuration

A typical triggering circuit employed by Sorensen is illustrated quasi-schematically in Figure 6. A portion of the output voltage is compared to a fixed reference, and any error signals which develop are differentially amplified and then mixed with a sawtooth signal. The combination of sawtooth and varying dc level is applied to a bistable multivibrator which switches "on" and "off" as a function of the dc level. The multivibrator when "on" inhibits a relaxation oscillator whose pulse-train output is used in SCR firing.

By expanding on this basic technique and utilizing three-phase networks, Sorensen has made 1000-ampere supplies that are available "off-the-shelf." See DCR-A and DCR-B series.

It should be noted that, although the phase-control technique yields a relatively inexpensive, high-power highly efficient supply, it does have some concomitant drawbacks. Its response time is in milliseconds as compared to the microsecond response of series-pass supplies (commutation is limited to twice the line frequency, i.e., 1/120 sec.)

Series pass may offer a regulation characteristic 10 times better than that of a phase-controlled supply, i.e., 0.005% vs 0.05% as well as much lower ripple (1mV vs 100mV).

Constant-Current Techniques

If the ideal voltage regulator has zero output impedance, the ideal constant-current regulator should have an infinite output impedance, i.e.,

$\frac{\Delta E}{\Delta I} = \frac{e}{o} = \infty$ Like voltage regulation, this is not a practically achievable goal although 0.02% I_o current regulators form part of almost every standard-product line.

It is rare today, however, to find power supplies that are solely current regulators. Usually, a constant-current supply will incorporate a constant-voltage mode. The rationale for this is not complicated. It is simply that both types differ only in their output-sensing techniques, with the input, reference and control networks all but identical. In fact, the sensing techniques do not vary considerably. While the constant-voltage regulator monitors the output voltage at either the output terminal or remotely at the load (see operating features), the current regulator senses the drop across a precision resistor connected in series with the load. Variations in output current produce small variations in sensing resistor voltage drop. In essence, there are twin circuits, one to provide voltage regulation and a second to provide current regulation. These two error signals are combined by an "OR" gate to yield one output signal. Depending upon the reference voltage settings for each amplifier and upon the load current demands, one of these twin circuits will take command. See the crossover section below.

Crossover Point

An important consideration in selecting any bi-modal supply is evaluating the supply's performance as either its output current in the voltage mode or its output voltage in the current mode approach the crossover point, i.e., that point at which the supply switches from one regulating mode to the other. Ideally, the crossover "knee" should have a right-angle characteristic as shown in Figure 7. A sharp "knee" is desirable inasmuch as it indicates continuous regulation through the crossover region.

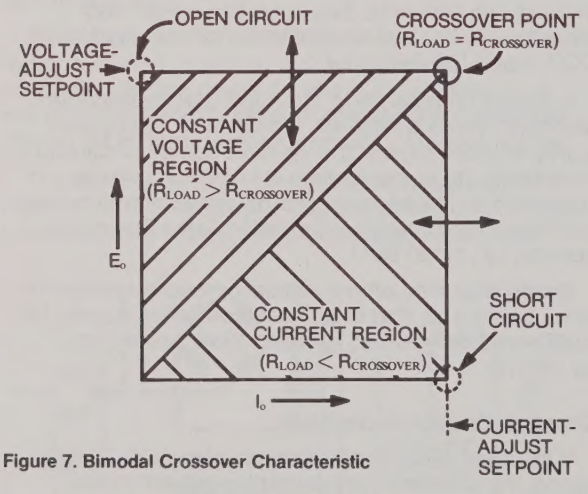

Figure 7. Bimodal Crossover Characteristic

Rounded "knees" indicate loss of regulation before the current (or voltage) reaches its crossover value. It should be noted that very sharp knees are a practical reality and are common in dissipation-type supplies.

To help in interpreting Figure 7, an example is offered: assume that a constant-voltage supply is operating at no load. This corresponds to the "open circuit" point. If a small load is applied and then is slowly increased, I_o would increase until

$\frac{E_o}{I_o} = R_{crossover}$. At this point, the supply converts to the constant-current mode. If the load continues to increase, the short-circuit point will be reached with the corresponding requirement that $E_o = 0$.

As may be deduced from Figure 7, bimodal supplies have built-in current or voltage-limiting features. Figure 7 should be compared to the current limiting characteristics of Figure 10 and 12.

Protection Circuits

The need for output protection in power supplies is evident. Near short-circuit conditions can draw currents high enough to destroy the supply; an overvoltage condition, on the other hand, may destroy the load. Two types of protection then are needed: overvoltage and overcurrent.

Overvoltage

Inasmuch as all output-voltage regulation techniques utilize sensing and error amplification in their feedback loops, it is not surprising that a component failure within the loop can drive the output voltage many times higher than its preset value.

With voltage-sensitive loads such as integrated circuits, an overvoltage condition could produce a catastrophic failure, with its consequent loss of time, money and material. Redundant circuits and the use of "hi-rel" components offer only a partial solution. Although component-failure prevention is a goal of any design, the most effective method of protecting voltage-sensitive loads is to inhibit the output voltage as it begins its excursion outside the regulation band. A typical circuit used by Sorensen to effect overvoltage protection is illustrated in Figure 8. If E_o begins to

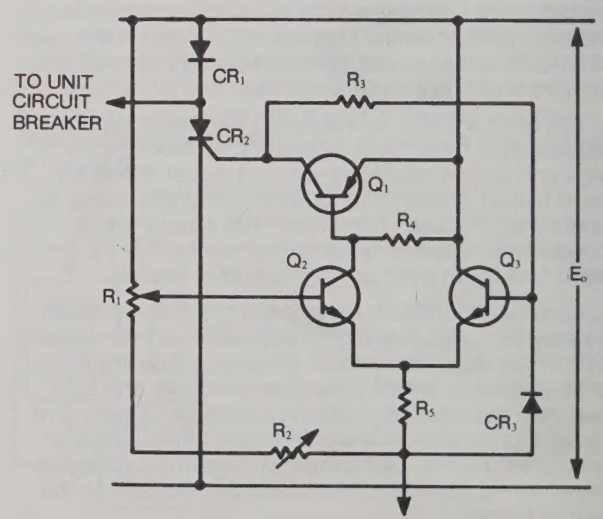

Figure 8. Typical Overvoltage Protection Circuit

increase rapidly, as in an overvoltage condition, the voltage across R_1 increases driving Q_2 further into conduction. As a result, the voltage drop across R_4 increases, and drives Q_1 into conduction, the resultant current pulse, "gates" CR_2 on, and the output is effectively shorted, decreasing E_o to a voltage equal to the forward drops of CR_1 and CR_2. The unit circuit breaker may be connected to the network as indicated. This assures that the supply will shut down automatically and will remain disabled until positive, corrective action is taken. Overvoltage circuits can be made to operate rapidly. For example, the circuit in Figure 8 has less than a 10-microsecond response time.

Overcurrent

There are three basic types of overload or short-circuit protection circuits employed by Sorensen. One, already discussed under *Crossover Point*, is simply a fringe benefit derived from owning a constant-voltage/constant-current supply. The other two, current limit and current feedback, are utilized in modular supplies where compactness is desirable and where a constant voltage is the only requirement.

A typical current limit circuit is illustrated in Figure 9. The voltage drop across R_4, caused by the load current, determines the drop across R_2 ($V_{R2} = V_{R4} - Q_1 V_{be}$). If V_{R4} and therefore V_{R2} become sufficiently large, Q_1 conducts and the error signals applied to the control element are inhibited as a function of load current. A typical characteristic is shown in Figure 10.

The current-foldback circuit is similar to the current limit; however, its "knee" is more rounded, i.e., there is poorer voltage regulation as the output current approaches the foldback setting.

A typical foldback circuit is shown schematically in Figure 11. Note that divider, R_1 and R_2 is connected across the output terminals. Under normal conditions $V_{R3} < V_{R1}$. However, if the load current rises to approximately 125% of I max rated, then $V_{R3} > V_{R1}$, and Q_1 conducts to inhibit the control-element drive network. A typical foldback characteristic is illustrated in Figure 12.

The advantage of foldback limiting is that the power dissipated in the series pass element is greatly reduced at short circuit. This action prevents overheating under short circuit conditions.

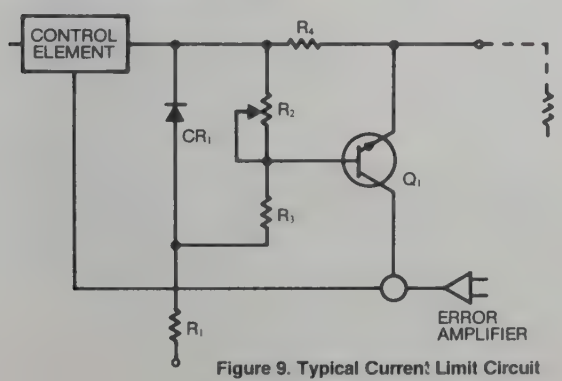

Figure 9. Typical Current Limit Circuit

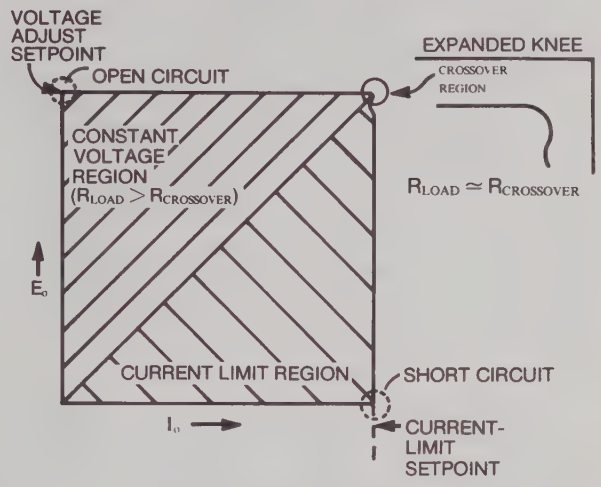

Figure 10. Current Limit Characteristic

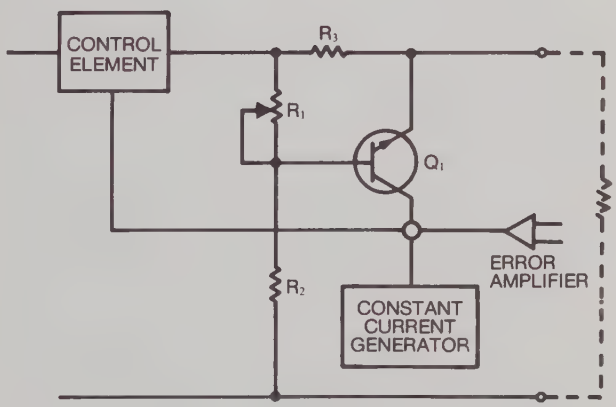

Figure 11. Current Foldback Circuit

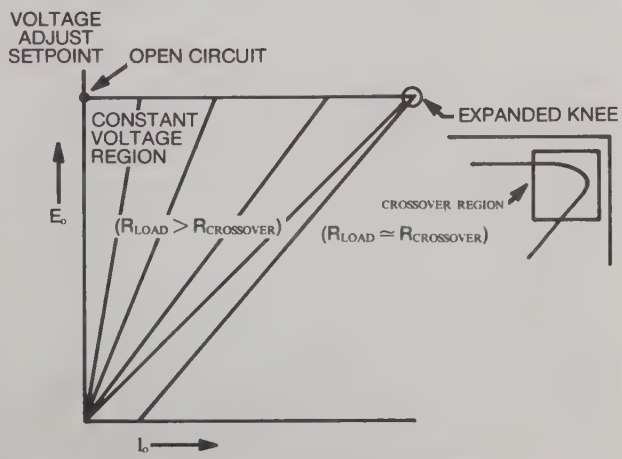

Figure 12. Current Foldback Characteristic

Selecting The Most Efficient Supply

Energy Cost Consideration

In these times of world-wide energy shortages, the cost of electricity becomes a major factor in the cost of operating a power supply system. Relatively small improvements in efficiency result in large reductions in the kilowatt input required from the power line, and therefore a significant reduction in the yearly operating costs.

Consider the changeover from a series regulator, which typically could run at 50% efficiency, to a high-frequency switching supply running at 75% efficiency, on a supply which delivers 28V @ 36 amps (1kW output).

(1) The series regulator consumes	2kW
(2) The switcher consumes	1.33kW

At 6¢ per kW-hr, over a year's period, the cost savings of the switcher will be $350.

Heat-Loss Considerations

The heat losses in the power supply become a major factor in the reliability of both the power supply electronic components and in associated electronic equipment mounted in the same cabinet enclosure. Component reliability is greatly improved by lowering the component ambient temperature (typically, a 10°C reduction can double the life).

Since the heat loss watts will determine the ultimate equipment cabinet temperature, then a comparison of efficiencies will enable one to estimate the relative cabinet temperature rise.

Consider again the example above:
(1) The series regulator has a power loss of 1kW.

(2) The switcher has a power loss of only 0.33kW. Therefore, if the useful output power of 1kW is dissipated elsewhere, then the power supply cabinet of the switcher would have only one third of the temperature rise of the series regulator (typically, a 30°C rise for the series regulator would only be 10°C rise for the switcher).

Normally, the equipment cabinet would dissipate the entire input of the regulator. In this case, the relative temperature rise would be 1.33/2.00 or 33.5% lower for the switcher. (A 60°C rise series regulator cabinet would drop to 40°C). Note that the air conditioning or fan-loads would also drop as noted above, when using the higher efficiency model. This will save additional energy costs.

Comparison of Regulator Types

When efficiency is important, which power supply type should be selected? While the specifications generally include the typical efficiency to be expected, some general guidance can be offerred as to the heat choice.

Type of Regulator	Typical Efficiency
Series-pass	30 - 50%
Pre-regulator series-pass	40 - 60%
Phase-control	60 - 80%
Ferro Resonant	60 - 80%
High-frequency switcher	65 - 85%

The Series Pass-Type offers the lowest efficiency, especially for the 5V output level. In low output power applications (under 150 watts), this type is generally preferred for its excellent performance specifications, simplicity and low-cost. At low power levels, the low efficiency is not a major consideration.

The Sorensen QSA, PTM & MMS/CMS models are in this class. The Sorensen QRD models are wide-range versions of this class.

Pre-Regulator Series-Type offers some improvement in efficiency over the series-type. The major application of this type is in wide-range output voltage supplies (e.g., 0-40V). The pre-regulator greatly improves the efficiency at the lower output voltage setting. This supply should be specified (in place of the series-type) on wide-range units where the power output exceeds about 150 watts. Higher efficiency wide-range units are discussed below, but the pre-regulator series-type offers the best performance specification in the 200 to 2000 watt power output range.

The Sorensen SRL models are in this class.

The Phase Control Regulator offers efficiency figures which are notably higher than the series type. In effect, this type of supply is a low-frequency (60Hz) switching supply. Its efficiency is quite close to that of the HF switcher discussed on the next page.

The phase-control type is available up to very high-power levels (such as 10 to 20kW), where no other type is generally available.

This type is generally offerred as a wide-range output (e.g., 0-600 volts). The Sorensen DCR-A & B models are in this class.

Ferro Resonant Regulator offers efficiency figures essentially equal to the phase control regulator discussed above. It is essentially a 60Hz constant voltage transformer which utilizes a magnetic flux simulation principle. The constant ac voltage is then rectified and filtered to provide a dc output.

It is subject to several severe limitations which do not apply to the other types of regulators:

(1) It is a resonant device which limits the line frequency to a narrow range (typically 60Hz ± 5%).

(2) It is an open loop regulator so that any load current change results in a sizeable output voltage change (typically 10% for a 20 to 100% load current change).

The major advantage of this type is that it is a very simple regulator and is therefore highly reliable. It is also slow-responding (typical 200 milliseconds) to load current changes. Note that the Sorensen line does not include this type of regulator.

The HF Switcher Regulator offers the highest possible efficiency, quite similar to the phase-control type discussed previously. This type also offers the lightest weight and smallest volume. It becomes the first choice for medium output power supplies (200 to 1500 watts) where the other specifications are acceptable.

The Sorensen SSD, STM, SRX, SLC, SLC-B and SLT models are in this class.

Operating Features

Introduction

While power-supply designers continually strive to develop a supply that provides an output which is independent of ambient-temperature variations, input-line voltage swings, load changes, etc., they also realize that such a supply would have limited value if it did not, at the same time, satisfy the ever-increasing demands for greater versatility.

The system designer, for example, has little use for a supply which is incapable of parallel operation when his test system requires a regulated-voltage, high-current source. Nor has he much use for a supply whose output cannot be altered by remote command — if such is his need.

The system designer's requirements are not unique. Even supplies initially specified for unsophisticated applications are sometimes required to demonstrate their full capabilities. In an attempt to anticipate the broad applications in which a power supply might be used, Sorensen has incorporated many custom operating features into its standard-product line. These include the capability for changing the output in response to remote external command (remote programming), monitoring and regulating the output voltage at the load terminals (remote sensing), and series and parallel operation.

Remote Sensing

The power-supply characteristic which is of the utmost concern to most power-supply users is line and load regulation. Power supplies today offer combined regulations to ± .001% of rated output, with some even better. To look at .001% in another way, consider that it is 1 part in 100,000 or .4mV in a 40-volt supply operating at E_{max}. In any case, it is an extremely small number. The regulation specification is obtained by testing the supply with the load located in close proximity to the supply output terminals. This is a reasonable way of specifying a product used in diverse applications. Consider this example: a 40-volt, 5-ampere supply with a voltage regulation of .001% is to be used in an application in which random load changes of 4 amperes are expected. If a total of 10 feet of No. 20 wire (≅10 milliohms/ft) is used as load leads, then voltage variations at the load terminals will be 400mV as opposed to 0.4mV at the power-supply terminals. Figure 13 illustrates this example.

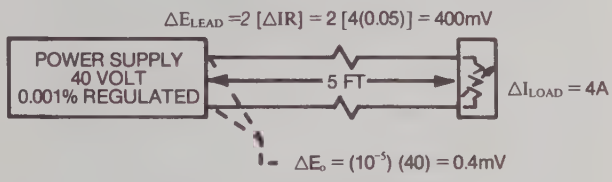

Figure 13. Local vs Remote Regulation

There are a number of ways in which this effect could be reduced. The load leads, for example, could be made oversized or the distance between supply and load could be shortened. Neither is entirely satisfactory nor in many cases practical. However, the entire effect can be eliminated.

As may be recalled from the discussion under *Principles of Operation*, voltage regulation is achieved by varying a series impedance or duty cycle in response to voltage variations *sensed* across the output terminals (see Figure 3). If instead of sensing across the output terminals, the sensing points were shifted to the load, regulation would then occur at the load, and the term "line and load regulation" would no longer be a misnomer. This is, in fact, what is done. All quality power supplies incorporate a *remote-sensing* feature which, through a few elementary steps, achieves regulation at the load. Figure 14, which is a modification of the output section of Figure 3, illustrates a typical configuration. Adaption to the remote-sensing configuration is greatly facilitated by design of the terminal board used on all Sorensen power supplies. It is simply a barrier-strip board with links (or wires) fitted between the output and sensing terminals.

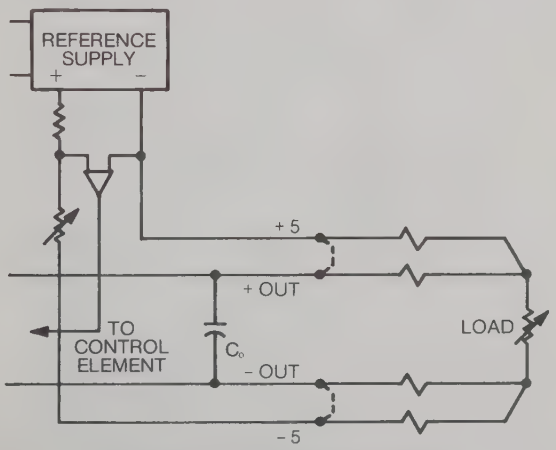

Figure 14. Remote Sensing Configuration

Removal of the links or wires and interconnection of the remote load and sensing terminals completes the conversion. The load leads now form part of the closed-loop system, and variations in their IR drops do not affect the voltage at the load.

Most laboratory supplies incorporate a front-panel mounted meter which, depending upon the manufacturer's point of view, may be connected internally across the sense or across the output terminals. If placed across the output terminals it would, during remote or local sensing operation, indicate the voltage across these terminals and not across the load. By connecting the meter across the sensing terminals, load voltage is indicated when remote sensing is used and supply voltage is displayed when local sensing is the operational mode. When possible, Sorensen connects the meter internally across the sense terminals, feeling that this serves the best interest of the majority of users and leads to less misinterpretation.

Occasionally, in power-supply literature, reports of "remote sensing compensating for load-lead drops" are found. Often this is misconstrued by a few to mean that the power supply somehow extends its maximum output voltage rating to include the load-lead drop. If a supply is rated at 60 volts max. and the load-lead drops total 3 volts, then the maximum voltage that the supply can deliver across the load is 57 volts and no more. "Compensation" merely indicates that there is a regulated voltage across the load.

For most Sorensen power supplies, the sensing current is 10 milliamperes, although for others it is as high as 100. In any case, the current is sufficiently low that the wire size used for sensing leads is inconsequential. However, it should be noted that the leads are susceptible to electromagnetic interference and that any pickup will be processed as an error signal. The result is an overall increase in PARD. To reduce this pickup it is recommended that a shielded twisted cable be used for sensing leads. The load end of the shield should be left unterminated; the power-supply end should be connected to the ground terminal. Although shielded cable is preferable, a twisted pair may suffice. Four twists per inch usually yields good results.

While remote sensing does bring regulation to the load, its use does affect other power-supply characteristics. For example, the output impedance at medium and high frequencies is determined by the output capacitor and its leads. When remote sensing is employed, the load-lead inductance becomes lumped with the capacitance-lead inductance. As a result, the output impedance is substantially higher. There is, however, a practical remedy; disconnect the internal capacitor and connect it, or one that is identical in all specifications, across the load. This solution not only eliminates the deleterious effect on output impedance but also negates the effects of remote sensing on transient response. Inasmuch as a transient condition usually is caused by an abrupt load change, it may be considered to be a high-frequency characteristic. It has already been noted that the output capacitor and its leads determine the high frequency characteristic; lumping, therefore, of power leads with capacitor leads, when remote sensing is employed greatly increases the transient response time.

Remote Programming

From the standpoint of versatility, remote programming is by far the most useful and probably most used power-supply feature. The ability to alter a supply's output voltage or current in response to a remote command is widely employed in the control of industrial processes, component batch testing, in the implementation of servo-system design, and in numerous quality-assurance programs.

With remote programming, the supply's output may be altered in steps, made continuously variable or made to vary around some fixed dc level The concept underlying remote programming is simple. As may be recalled from the discussion in *Principles of Operation*, local control over the output was achieved by placing a potentiometer in the sensing (or *programming*) network. A variation of the same technique is used in remote programming. In most Sorensen supplies, the sensing network is made available to an external control device or network through a line-and-terminal board arrangement similar to that used in remote sensing. Others utilize a different physical arrangment. The electrical principle, nonetheless, is identical. Figure 15 illustrates a typical remote-programming configuration.

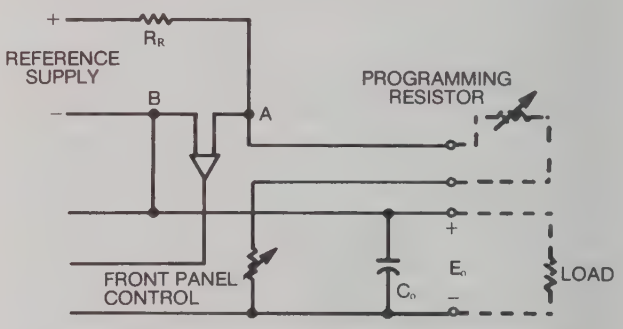

Figure 15. Typical Remote Programming Configuration

Resistance-Programming Coefficent

Obviously, in order to resistance-program a power supply, calculation of the programming resistances that will give each desired output is a prerequisite. This is readily accomplished, since all programmable power supplies have constant, predetermined programming coefficients, or ohms/volt sensitivities.

The constancy of the coefficient is traceable to the comparison amplifier which, in Figure 15, maintains points A and B at zero potential with respect to each other. The entire output of the reference supply, therefore, is dropped across resistor R_R = 887 ohms. Allowing for the amplifier current, the current through the front-panel control would then be 10mA. For each 100

ohms through which this current passes, one volt of output would be developed. This supply then has a programming coefficient, or ohms/volt sensitivity, of 100 ohms/volt.

When selecting a programming resistor, the temperature sensitivity and voltage rating of the resistor should be considered. Any changes in resistance due to temperature gradients whether traceable to ambient effects or self-heating will cause directly proportional output variations. Good practice dictates the use of a resistor with a temperature coefficient equal to or less than 20 ppm/°C and a wattage rating at least 10 times the power dissipated, i.e., $I_{2prog}\ R_{prog} \times 10$.

The precautionary procedures concerning electromagnetic pickup that were recommended under *Remote Sensing* are equally applicable to remote-programming leads.

The preceding discussion on resistance programming, though slanted toward voltage-mode programming, also applies to current-mode resistance programming with, of course, the necessary alterations in units, e.g., ohms/ampere instead of ohms/volt.

Inasmuch as the output voltage tracks and is directly proportional to the programming resistance, an open programming circuit, corresponding to an infinite programming resistance, will drive the output voltage higher than the maximum rating of the supply. While it is unlikely that such a condition would ever exist with a fixed programming resistor, cases of programming leads coming loose or being disconnected during operation are not unknown. However, the probability of occurrence becomes greater as more complex resistance networks are used. For example, if a break-before-make switch is employed, the instant of switching represents an infinite impedance. Make-before-break switches, too, can lead to increased switching times if the programming networks are not properly designed.

Signal Programming

Many applications call for programmed outputs which are not characterized by the step functions associated with resistance programming. Sinusoidal and triangular characteristics are among the more conventional outputs required. These and most other linear and nonlinear time-varying outputs are readily obtained through signal programming.

The signal-programming configuration is similar to that illustrated in Figure 15 with one exception: the programming resistor is replaced with a voltage source. The source must meet certain compatibility requirements. It must, for example, be capable of absorbing the programming current and be capable of producing a clean signal. With regard to the latter any noise and ripple generated by the source, and within the bandwidth of the supply, will be reproduced in the output characteristic.

In most Sorensen transistor power supplies, coefficients for voltage-signal programming in the voltage mode are a volt/volt, i.e., one volt of programming signal is required to produce one volt of output. The supply then is essentially a unity-gain power amplifier. The current-mode signal programming coefficients differ widely with design and model. Typically, they range from 0.2 to 2 volts/ampere.

Digital-To-Analog Converter Programming

In many modern systems, the computer is used to program the power supply in response to a digital program. To couple the computer to the power supply, a digital-to-analog converter is required (DAC). This device translates the digital computer output into an analog voltage signal. The analog signal can then be used to program the power supply, as discussed above under *Signal Programming*.

This device also serves to isolate the digital signal from the power supply output voltages. The Sorensen DAC is called the DAP (digital to analog programmer). The DAP can be used to program both output volts and output current. The 488-DAP unit provides two independent channels which can be used for volts and current control of the same supply, or could be used for controlling two separate power supply output voltages.

This device will interface with the industry-standard 488 Bus.

Programming Response Time

Obviously, the response of a standard programmable supply is not instantaneous. Primary time delays are traceable to (1) the large output capacitor which gives the supply its high-stability characteristic and acts as a low-pass filter, and (2) R-C networks in the feedback loop that limit output overshoots during load transients. In combination, these two act as a pair of cascaded filter networks and introduce delays that are not only a function of the capacitance values but also of the load. The magnitude of the delay, being dependent in part upon the load, differs from application to application. Typically, however, the programming rate is about one volt per millisecond.

While 1 volt/millisecond is an adequate programming rate for many applications, the nature of modern technology is such that rates of 10^3 and higher are often required. To achieve this speed, without significant degradation in stability, PARD characteristics and transient response, is the goal of much of the recent advanced work in power-supply development.

The first product line resulting from an intense development program at Sorensen is the QRD high-speed programmable supply. The design of the QRD incorporates novel circuit techniques which endow it with state-of-the-art programming speed and at the same time give it excellent response ripple and stability characteristics.

Inasmuch as high-speed programming represents a recent technological breakthrough, a universally acceptable definition of programming speed has not been formulated. In the interim, Sorensen has elected to specify programming speed in two ways, each corresponding to the more common programming function: step and sinusoidal.

The step-input definition specifies programming time as the maximum time required for the power-supply output to change from its preprogrammed level to the programmed value as measured at the 10% and 90% points. Figure 16 illustrates the definition with the typical up- and down-programming characteristics of the Sorensen Model QRD 30-1. Note the rapid programming times.

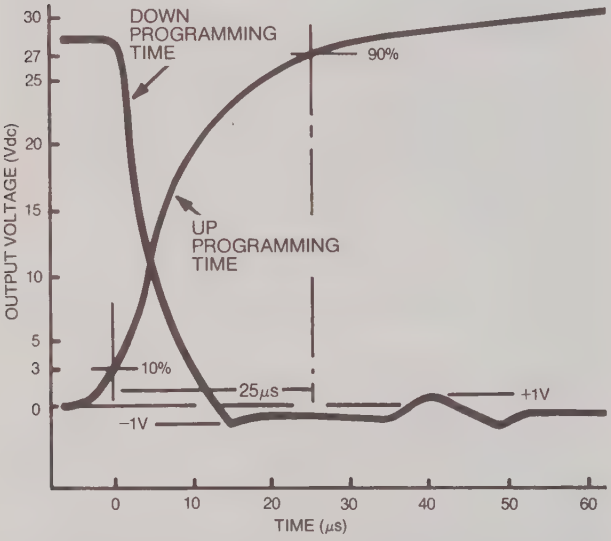

Figure 16. Typical Up and Down Programming Time Characteristics

The sinusoidal-input specification defines programming time in terms of the maximum sinusoidal input frequency that the supply will reproduce without distortion. In the development of the QRD Series, analysis showed an inverse relationship between the maximum input frequency and the pk-pk value of the input sine wave. Empirical data yielded the following approximation: $f_{max} = \frac{230{,}000}{E_{pp}}$ Hz when the dc output of the supply is set to $E_{max}/2$. Figure 17 illustrates the magnitude of variation in the approximation for a typical set of QRD models. One other definition of programming time, i.e., slewing rate, may be encountered. While slewing rate is a convenient term by which a few power-supply manufacturers choose to specify programming time, users not familiar with its limitations may be astounded by the magnitude of the rates which it yields. But it is, at best, a marginally adequate term, fine for some applications, disappointing in others.

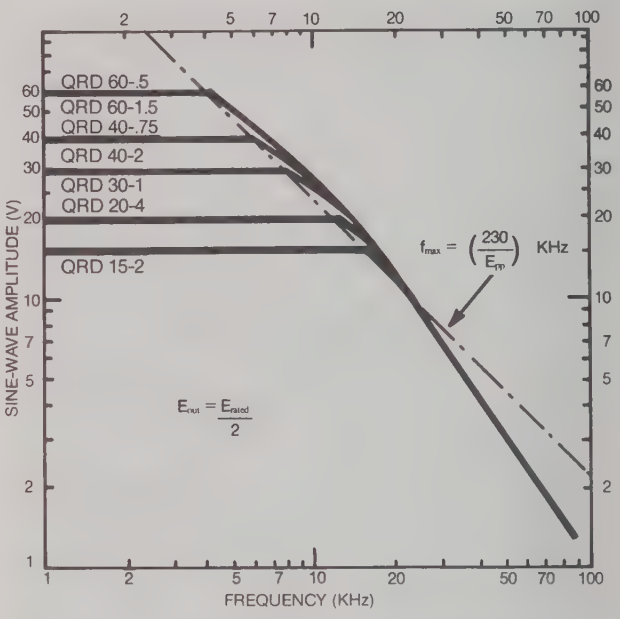

Figure 17. Programming Sinusoidal Frequency Response

Multiunit Operation

With the introduction of high-voltage, high-current power supplies, e.g., Sorensen's DCR Series, series and parallel requirements have become limited. However, both do and will continue to find wide usage in short-term laboratory applications where flexibility is a much-valued asset.

There are two basic types of parallel operation, and two in series. In the following section each of these will be discussed in terms of advantages and disadvantages.

Direct Paralleling

The intent of any power-supply paralleling technique is to meet the current requirement of the load by increasing the current capabilities of the source. When constant-voltage/constant-current supplies are available, direct paralleling may be used. With this method, the current crossover value of each supply is chosen so that the sum is equal to or greater than the load current required.

An attempt is then made to match as closely as possible the output voltage of each unit. This voltage is, of course, the voltage across the load. Next, all supplies are placed in a standard parallel configuration about the load (see Figure 18). When the load is applied, the supply with the highest output voltage (it is impossible to match exactly the output of all units) will provide current to the load. As this current becomes equal to the crossover current, the output voltage begins to drop, and the supply with the next highest voltage assumes the load rejected by the first. This process continues until the load current requirement is satisfied.

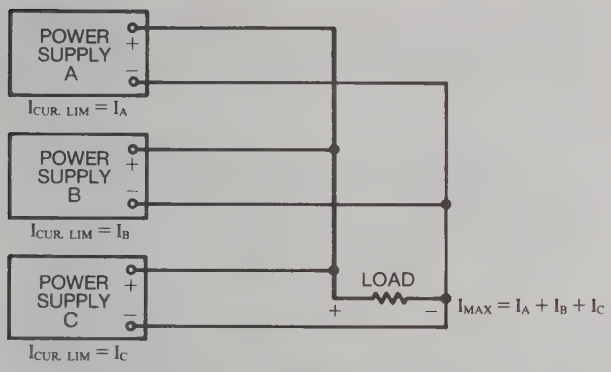

Figure 18. Direct Paralleling Configuration

An unlimited number of units may be direct-paralleled. As will be discussed in the next section, limitations on numbers of units is one of the drawbacks of master-slave paralleling and hence constitutes an advantage for direct paralleling. In direct paralleling, regulation does deteriorate and becomes the sum of the regulations of all units paralleled plus the sum of the differences, between units, in output voltage.

Master-Slave Paralleling

In master-slave operation one unit, the master, supplies the drive or control signal to the control elements of all other units (slaves) and to the master itself. Inasmuch as the feedback networks in all slave units have been disabled prior to operation, the master unit regulates the output voltage of all units. The load current is simultaneously shared by all units, and has a maximum value that is the product of the number of parallel units and the current limit or crossover setting of the master unit derated to 90% (to allow for unbalances).

Both the primary advantage and disadvantage of master-slave paralleling result from the interconnection of master-unit drive signal and slave-unit control elements. In this configuration, the system regulation is the regulation characteristic of the master unit, a much closer regulation than would be achieved in direct paralleling. However, it is the strength of this drive signal which determines the number of units which may be paralleled. The current deration provides a cushion for the typical tolerances which accompany current sharing. Figure 19 illustrates a typical master-slave

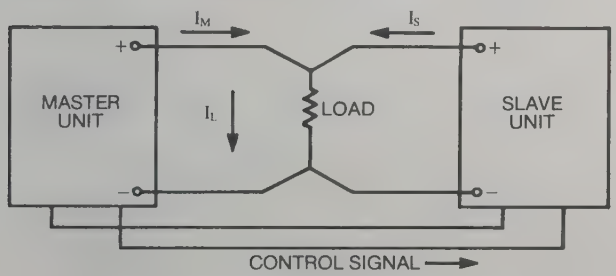

Figure 19. Master-Slave Paralleling Configuration

configuration. The slave output I_S will be forced (approximately) equal to the master output I_M. Then the load current I_L will equal the sum of I_M and I_S (or 2 I_M). It should be noted that most Sorensen supplies allow access to the internal control network through an external link-and-terminal board arrangement. This feature facilitates (1) the connetion of slave-unit control elements to the master-unit drive network, and (2) the disablement of slave-unit feedback networks.

Series Operation

Series Operation is designed for those applications which require a higher voltage than a single power-supply can provide. For Sorensen supplies, series operation is effected by simply connecting the supplies in a standard series configuration (see Figure 20).

The maximum number of units which may be connected in series is limited by the maximum dc-to-ground voltage for which the supply is rated. For example, five 40-volt units each with a 200V dc output terminal-to-ground rating may be series-connected. System output regulation as would be expected is the sum of the unit regulations.

Sorensen recommends that, when using units in series, a diode be connected across each set of output terminals as shown in Figure 20. If a unit becomes disabled in series operation the diode protects the failed unit from the reverse voltage derived from the functioning supplies. Protection-diode type numbers are listed in most instruction manuals or may be obtained by writing or calling Sorensen.

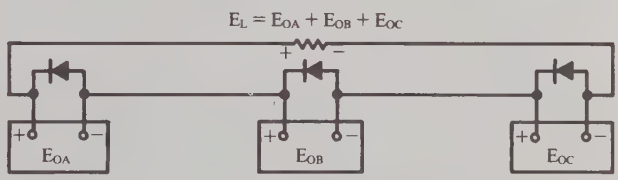

Figure 20. Series Operation Configuration

Master-Slave Series Operation

Similar to Master-Slave Parallel Operation (above), the Master Unit is utilized to supply the control signal to the Slave unit. This may be accomplished by removing the internal reference voltage from the slave unit and replacing it with the output voltage from the Master. If the Slave unit is then configured so that it is a unity-gain device, the Slave output voltage will exactly equal Unit of the Master. See Figure 21.

The Slave Output V_s will be forced equal to that of the Master V_m. Then, the load voltage will equal the sum of V_m and V_s (or $2V_m$). (Diodes CR_A & CR_B prevent reverse voltage from appearing across a disabled supply).

Both Master and Slave should have their current limiters set for the desired maximum load current, for overload protection. Note: Each power-supply model has

its own special scheme for accomplishing the above so that the Instruction Manual must be consulted. (Some models do not permit this operation).

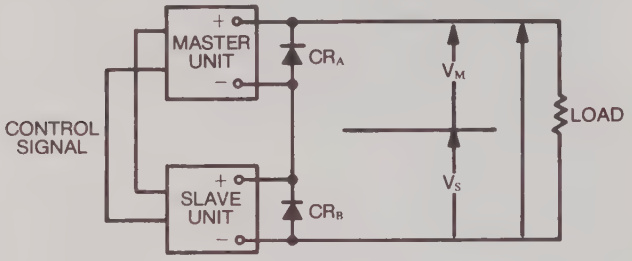

Figure 21. Master-Slave Series Operation

Verifying Specifications

Introduction

In the past the power-supply industry has been criticized for making exorbitant performance claims and in general for playing the "spec" game. Much of this criticism has come from power-supply users and therefore should be considered valid. The customer who has purchased a power supply that does not perform as he thought it would assumes the supply to be poorly designed or fabricated, and hence, the manufacturer has misrepresented his product. Such is rarely the case. A power supply may appear to perform poorly if the measurement techniques employed are incorrect or if the specification definitions are poorly understood.

To help in diminishing the effects of these sources of irritation, Sorensen has developed a set of precise specification definitions (see Glossary of Terms) and a systematic set of procedures for verifying the more important output specifications. The latter constitutes the remainder of this section.

Premeasurement Considerations

The techniques used in measuring the characteristics of precisely regulated supplies should be every bit as good as those employed in evaluating the performance of more sophisticated laboratory instruments. Poor connections, careless choice of test location, disregard of test-system-generated noise, etc., can only detrimentally influence test results. A few general rules that should be observed when testing either constant-voltage or constant-current specifications follow:

1. Connect all test instruments at the power-supply sensing terminals, not at the load. Connect the load to the load terminals.

The deleterious effects of measuring at the load may be illustrated by an example. Consider a 10V, 1A unit with a specified load regulation of ±0.01% (±1.0mV). With the output set to 10V, the voltage deviation could be 2mV. But this is at the supply terminals. Just one foot of No. 23 load-lead wire is sufficient to drop 20mV (eight times the maximum deviation permitted by the regulation specifications). Results from a test setup of this kind would, of course, be invalid.

Another not-so-obvious example of the same problem is encountered when measurements are made at front panel binding-post terminals instead of the barrier-type "sense" terminals. The binding post, in essence, introduces a resistance between the test leads and the regulated (sensed) output points. This resistance results in a voltage drop which is subtracted from the output voltage before measurement. It, therefore, has the same effect as load leads. Figure 22 gives both schematic and physical representations of a binding post and its unregulated voltage drop. Note that exactly the same problem may be encountered when the load leads are connected to the sense terminals. (Figure 23 illustrates correct load-lead location.)

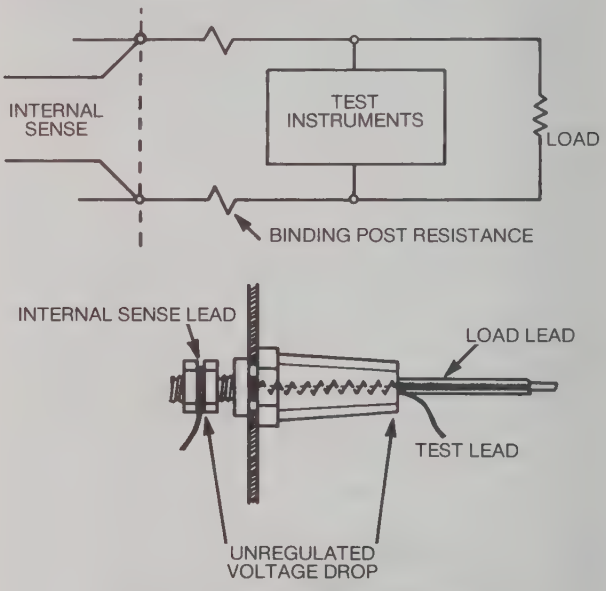

Figure 22. Binding Post Induced Resistance

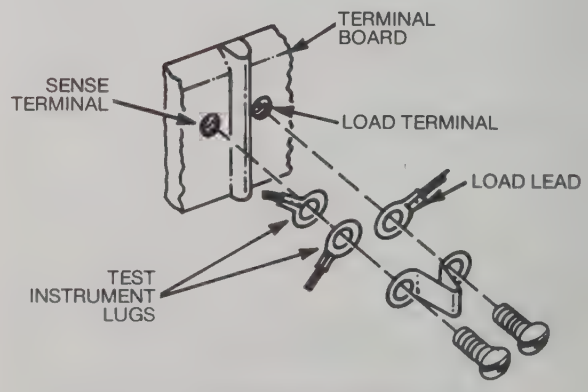

Figure 23. Recommended Rear Terminal Connections

2. Use shielded twisted wire or coaxial cable for test leads. Stray pickup, many times, can and does substantially influence the extremely small deviations being measured.

3. Terminate test leads with solder or spade-type lugs.

Alligator clips, or other similar types of connectors, may introduce undesirable contact resistances and result in false readings.

4. Connect leads from each measuring instrument to power-supply sense terminals.

Interaction or coupling effects sometimes cause inaccurate measurements.

5. After connecting the test system, check for system-generated noise and ripple.

Ground loops sometimes introduce noise and ripple not related to power supply's performance.

Performance Verification

Constant Voltage Specifications

Regulation

Figure 24 illustrates the general test-instrument configuration recommended for evaluating the performance of constant-voltage supplies. The oscilloscope and true RMS voltmeters are not required for regulation measurements. Note that the maximum current rating of the autotransformer should be 10% to 20% higher than the maximum ac current drawn by the supply. The latter is listed either on the data sheet, or in the instruction manual that accompanies each unit.

To check voltage regulation, the unit output voltage, with no load applied, is adjusted to its maximum rating and the ac input is set at nominal, i.e., 115V ac. Next, the differential-voltmeter is nulled and the load is applied until the current drawn is at rated maximum. The deviation from null is recorded. Following this, the ac voltage is decreased to minimum rated, the null-position is re-established, and the input voltage is increased to maximum rated. The observed deviation from null is added to that previously recorded — the sum representing the total line and load regulation. For comparison purposes, the specified percentage regulation may be converted into millivolts by multiplying the percentage by two, converting to decimal and multiplying the results by the maximum rated output voltage.

PARD

To verify the PARD specification, a true RMS voltmeter and an oscilloscope should be placed across the output terminals as shown in Figure 24. Note that the oscilloscope should be ac coupled to preclude the influence of dc drift. In selecting a voltmeter and an oscilloscope, assure that their bandwidths are equal to or greater than those specified on the data sheet or in the instruction manual. PARD data is taken at nominal input and full-rated voltage and current output. The ripple indicated by the voltmeter and pk-pk voltage displayed on oscilloscope should be equal to or less than specifications. Note that, if a unit has a fast-programming mode, PARD may be checked in this mode by first performing the necessry conversion procedures and again comparing indicated levels with those specified.

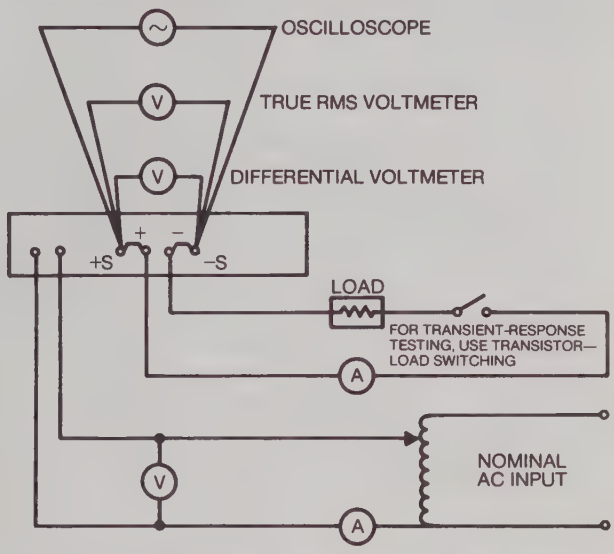

Figure 24. Constant-Voltage Specification Test Arrangement

Transient Response Time

Transient response time or the time it takes for the output voltage to return to a specified band following a step-load change, either full-load to no-load or no-load to full-load, is accomplished by electronically switching the load and observing the response characteristic on an oscilloscope. Figure 24 illustrates the configuration. The differential voltmeter and true RMS voltmeter are not used in order to reduce inductive delays introduced by the test system. Test leads should be made as short as possible and the load should be noninductive. Note that switching should be accomplished in 1/10 or 1/20 of the rated response time of the supply.

Drift

Drift is a long-term characteristic which is evaluated under controlled conditions of constant load, line voltage, and ambient temperature. The results are usually recorded on a strip-chart recorder connected across the load terminals of the supply. The stability of the recorder is a primary characteristic to be considered when checking drift. Assure that it is sufficiently small so as not to influence the test results. The drift specification normally applies over an eight-hour period after warm-up, with warm-up in constant voltage operation usually set at one-half hour. The particulars are either listed on the data sheet or in the instruction manual.

Programming Time

Programming time is evaluated by connecting a mercury-wetted relay in series with the programming resistor and then driving the relay at 60Hz. An oscilloscope should be connected across the output terminals to display the characteristic. Due to the widespread use of a number of differing programming time definitions, the Sorensen definition should be reread when evaluating the results.

Constant-Current Specifications

The instruments and techniques used in verifying constant-current specifications are quite similar to those employed in evaluating constant-voltage performance. Figure 25 illustrates the general test-system configuration. Note that it is not the current that is monitored, rather it is the voltage drop across a precision laboratory shunt. This resistor should be judiciously selected to be noninductive and to have a power dissipation rating at least ten times that required. The load must be noninductive and be capable of absorbing the full compliance voltage. (The compliance voltage is defined as $E_c = I_{const} R_{load}$. Depending upon the crossover characteristic (see Figure 7), it may range from 95% to 98% of the maximum voltage obtainable in voltage mode operation.)

Regulation

In measuring current-mode regulation, the true RMS voltmeter and oscilloscope are not needed. For models equipped with a dual-function output meter, an additional voltmeter connected across the load terminals is required. The recommended procedure follows: adjust the no-load output voltage to maximum rated, and then apply load until the output voltage drops to the maximum compliance rating (listed in instruction manual). The differential voltmeter is then nulled, and the shorting switch is closed. Any steady-state deviation from null is recorded. Next, the switch is opened and the input line voltage is set at minimum rated. The deviation from the null position is summed with that previously recorded. The total may then be converted to amperes and compared with the specified regulation. Note that the conversion factor is the reciprocal of the shunt resistance.

PARD

In verifying current-mode PARD, a true RMS voltmeter and an oscilloscope are connected across the precision shunt as shown in Figure 25. The differential voltmeter is not used. To preclude dc drift effects, the oscilloscope should be ac coupled to the shunt.

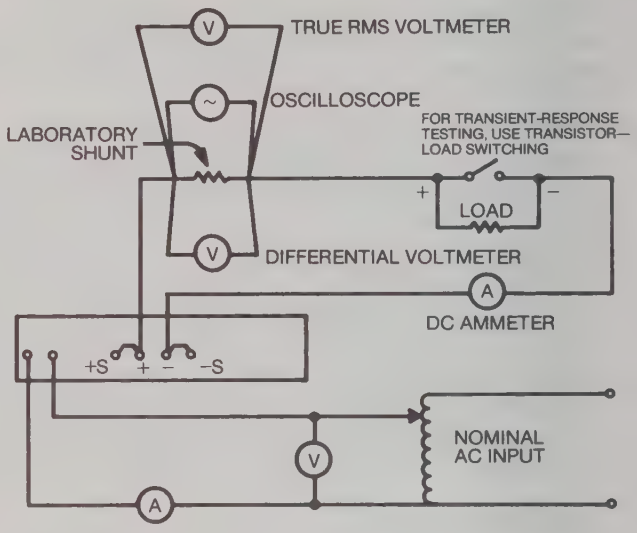

Figure 25. Constant-Current Specification Test Arrangement

The procedural sequence follows: with no load applied and the input voltage set to maximum; then load is applied until the output voltage drops to the maximum compliance. (For models equipped with a single output meter, an additional voltmeter will be required to measure the compliance voltage.) The true RMS voltmeter and oscilloscope are then monitored, and ripple and pk-pk noise are noted and compared with the published PARD specification.

Transient Response Time

The only instrument required for transient response time measurements is an oscilloscope (see Figure 25). The load switch should be transistorized to provide rapid switching — less than 1/10 the rated response time. The procedure simply entails monitoring the output terminals as the load is switched from zero to a value that will yield the maximum compliance voltage. Note that the load should be noninductive and that the test leads be as short as possible. Delays in response may be caused by test-system inductances.

Drift

The drift characteristic for the current mode is specified for controlled conditions of constant line, load, and ambient temperature. The unit under test and the load, if possible, should be placed in a temperature-controlled chamber. If this is not possible, the temperature around the unit should be monitored frequently. To guarantee that the load resistance does not change significantly due to self-heating, it should have a dissipation capacity at least ten times that required by the supply's output.

Isolation (Hi-pot) Testing

Most power supplies provide electrical isolation between the ac power line and the dc output voltage. In addition the ac input is isolated from the chassis.

The above isolation is required for safety reasons and is a U.L. requirement. The metal chassis and enclosure is connected to the power line safety ground (green wire) or "earthed" directly.

Similarly, most power supplies provide electrical isolation between the output dc voltage and the chassis ground. This isolation level is much smaller than the ac line isolation voltage level, since most dc output voltages are grounded in actual applications (for safety reasons).

Because of the ac currents which can flow through capacitors used in the supply, the isolation is tested by applying a dc "Hi-pot" voltage rather than an ac voltage. On switching supplies (e.g., Sorensen STM, SSD, SLC-B, SRX, SLC) this test can be very destructive to the power supply and should not be attempted. Instead, the use of an ohmmeter test for isolation is recommended (an ohmmeter reading of greater than 100,000 ohms is considered satisfactory). The ohmmeter should not apply more than 100V dc to the power supply.

Typical isolation test voltages are 1300V dc (for 115V ac input models) for line to chassis (with output connected to chassis) or 200V dc from output to chassis. See caution note above on switching supplies. Consult factory before attempting to make a voltage-isolation test on any supply.

Glossary of Terms*

Absolute Accuracy
The correctness of the indicated value in terms of its deviation from the true or absolute value.

Automatic Crossover
A term applied to bimodal power supplies (constant voltage/constant current) that describes the transferal from one operating mode to the other at a predetermined value of load resistance. Usually the crossover point is preset by means of front-panel controls. (NEMA derived)

Calibration Accuracy
Synonymous with absolute accuracy.

Compliance Range
The load voltage capability of a power supply operating in the constant-current mode (it is analogous to the maximum current rating of a power supply operating in the constant-voltage mode).

Constant-Current Power Supply
A power supply that maintains a stabilized output current within prescribed limits with respect to changes of influence quantities (line, load, ambient, etc.). (NEMA derived)

Constant-Voltage Power Supply
A power supply that maintains a stabilized output voltage within prescribed limits with respect to changes of influence quantities (line, load, ambient, etc.). (NEMA derived)

"Crowbar" Overvoltage Protection
A load protection circuit designed to prevent excessive output voltage. It rapidly places a low resistance shunt across the output terminals of the power supply, thereby initiating action to reduce the output voltage to a low value. (NEMA derived)

Current Limiting
A general term applied to any of three kinds of short circuit or overload protection (see Figures 8, 11 and 13 in Principles of Operation), and which describes the action of limiting the output current to some maximum predetermined value (fixed or adjustable) and automatically restoring the power supply to normal operation when the overload or short circuit is removed. (NEMA derived)

Drift
The maximum change of an output parameter during a specified period of time following a warm-up period, with all external operating and environmental parameter influences maintained constant during the warm-up time and the period of drift measurement. Drift includes the periodic and random deviation (PARD) from dc to a specified upper frequency limit that coincides with the lower frequency limit for PARD. (NEMA derived)

Efficiency
The ratio of the output power to the input power, usually expressed as a percentage.

Harmonic Distortion
The distortion of a sinusoidal wave characterized by the presence of harmonics of the fundamental frequency. Percent Harmonic Distortion is an appropriate figure of merit and is defined as the ratio (in percent) of the square root of the sum of the squares of all RMS harmonic voltages (or currents) to the fundamental.

Operating Temperature Range
The range of ambient temperatures throughout which a supply will meet all of its ascribed output specifications.

Output Impedance
Output impedance or dynamic output impedance is the impedance presented by the power supply to the load. It is calculated from the ratio of the change in output voltage (at the prescribed terminals) to the change in load current causing the change. The impedance is specified from dc to a stated maximum ac.

Overshoot
A transient voltage or current rise above the regulation band caused by large step-like changes in the load or input line or by the application or disconnection of input power. (NEMA derived)

Parallel Operation
Interconnection of two or more power supplies in a manner as to obtain summation of their output currents. In general, Sorensen power supplies may be operated in either a direct or a master-slave configuration (see operating features). (NEMA derived)

*Definitions derived from NEMA Standards Publication Pub. No. PY1-1972 are so indicated.

PARD
An acronym for Periodic and Random Deviation which is defined as the deviation in the regulated output parameter, voltage or current, over a specified bandwidth with all external and environmental parameters held constant. The term excludes deviations attributed to drift. (NEMA derived)

Phase Shift
The difference between corresponding points on input- and output-signal wave shapes (not affected by magnitude) expressed as degrees lead or lag.

Programming Speed
The rate of change of a programmed output parameter in response to a program command.

Regulation:
a. Line — The maximum steady-state differential in the controlled output parameter resulting from a full-range change in source voltage.
b. Load — The maximum steady-state differential in the controlled output parameter resulting from a full-range load change.
c. Line and Load Combined — The maximum steady-state differential in the controlled output parameter resulting from concurrent full-range change in load and input voltage, both in the direction which represents the worst case.

Repeatability
The closeness in agreement among a number of consecutive measurements of the controlled output parameter, with each measurement following an identically programmed input command.

Remote Programming
A power-supply feature whereby the controlled output parameter, voltage or current, may be controlled through the application of external resistances, voltage signals, or current signals to designated external terminals. (NEMA derived)

Remote Sensing
A standard feature of most quality power supplies which allows the user to shift the regulation point from the supply's output terminals to an external location. The variations normally produced in the load leads by local changes are corrected by the sensing and regulating networks (see operating features). (NEMA derived)

Resolution
The minimum discernible change in the controlled output parameter that can be made with the applicable front-panel control, (NEMA derived)

Ripple
Those deviations in the controlled output parameter which are harmonically related in frequency to the applied input power and any internally generated switching frequencies. Normally, defined as an average value (rms) or the maximum peak-to-peak amplitude. More recently, PARD, which includes a bandwidth limit, has been used when defining ripple. (NEMA derived)

Series Operation
The operation of two or more power supplies with the positive output terminal of one connected to negative output terminal of another, so that the output voltages of the supplies are additive. (NEMA derived)

Settling Effect
The relatively slow change of an output parameter which follows an initial variation of the same parameter and exists as an added output variation.

Sinusoidal Frequency Response
The maximum sinusoidal frequency to which a fast-programmable power supply will respond with negligible distortion in the output waveform.

Slewing Rate
A term sometimes used to describe the response speed of a fast-programmable power supply. It is generally defined as the slope of the chord to the first time constant of the exponential response.

Stability — See Drift

Temperature Coefficient (Output Effect Coefficient)
The percent change in the controlled output parameter due to a 1°C change in ambient operating temperature within the operating temperature range. (NEMA derived)

Transient Response Time
Transient response time is defined as that time interval following an abrupt change of influence quantity (load or line) for the controlled output parameter to leave and to return (and stay within) a specific band.

Warm-Up Time
That period, following the application of input power, before a power supply meets its rated performance characteristics. (NEMA derived)

Sorensen Company warrants all parts of each power supply to be of sound design, good materials and workmanship, and will repair or exchange any parts proven to be defective under normal use at no charge for a period of 5 years from the date of shipment. Please note that MM, CM and SRM Series carry a warranty period of 2 years.

Sorensen's liability under the terms of this warranty is limited to the satisfactory repair or the replacement of defective products which have not been damaged through accident, abuse, misuse, or unauthorized repair. Sorensen shall in no case be liable for any special or consequential damages of any nature.

The unused portion of this warranty is fully transferable from the original purchaser if the Sorensen product is a component of the original purchaser's product or system.

Defects will be corrected by the factory or one of our authorized field service centers throughout the world. All products returned for repair must be shipped freight prepaid and be accompanied by a Return Material Authorization. Returned freight is shipped collect.

Sorensen Company
676 Island Pond Road
Manchester, NH 03103 USA
Tel: 603-668-4500
TWX: 710-220-1339

Modular Power Supplies Selection Chart

Amps dc	Nominal volts, dc 5V	10V	12V	15V	18V
0 to 0.4	MMS5-.250	MMS10-.120	MMS12-.100 MMD12-.120(1) MMD12-.240(1)	MMT5/15E(3) MMD15-.025(1) MMD15-.065(1) MMS15-.100 MMD15-.100(1) CMD15-.100(1) MMD15-.200(1) CMD15-.200(1) MMD15-.350(1)	
0.5 to 0.9	MMS5-.500 MMT5/15E(3) CMS5-.500			PTM15.8D(1)	
1.0 to 2.4	MMS5-1.00 CMS5-1.00 MMS5-2.00 CMS5-2.00 SRM200-01(4) SRM200-06(4)	QSA10-1.4(2)	PTM12-1D(1) SRM200-04(4) SRM200-06(4)	PTM15-1.5D(1) SLC15-2B PTM15-2.4 SRM200-05(4)	QSA18-1.1(2) QSA18-1.9(2)
2.5 to 4.9	PTM5-4	QSA10-3.7(2)	PTM12-2.7 PTM12-3D(1) SLC12-2.5B SLC12-4.5B PTM12-4.4 SRM200-01(4) SRM200-02(4)	PTM15-2.8D(1) SLC15-3.6B PTM15-3.5 SRM200-03(4)	QSA18-3.0(2)
5 to 10.9	PTM5-7 SLC5-10 SLC5-6B SLT-02D(3) SLT-025(3) SLT-05D(3) SLT-52D(3) SLT-525(3) SLT-55D(3)		PTM12-6.5 PTM12-10.5 SLC12-8B	PTM15-5.5 PTM15-9.5 SLC15-10B	
11 to 15	SLC5-11B PTM5-11		STM12-12 SLC12-12B SSD12-15	SSD15-12 SLC15-13.3B	
16 to 19	PTM5-16		SLC12-16.7B		
20 to 29	SRM200-01(4) SRM200-02(4) SRM200-03(4) SRM200-04(4) SRM200-05(4) SRM200-06(4) STM5-24 SLC5-20B		STM12-20 SSD12-22 SLC12-25B	STM15-24	
30 to 39	SSD5-30 STM5-36 SLC5-30B		STM12-30	STM15-32	
40 and up	SSD5-45 STM5-60 STM5-100 SLC5-40B SLC5-60B SSD5-75 SRX5-200 SSD5-225		STM12-50		

Notes: (1) Dual output power supplies (2) Wide range output power supplies (3) Triple output power supplies
(4) Quadruple output power supplies

Modular Power Supplies Selection Chart

Nominal volts, dc					
20V	24V	28V	36V	48V	Greater than 48V
	MMS24-.050	MMS28-.040		QSA48-0.4(2)	QSA175-.25(2) QSA265-.15(2)
				QSA48-.8(2)	QSA75-.5(2) QSA120-.5(2)
SLC20-1.5B	SLC24-1.2B PTM24-1.6 SLC24-2.2B PTM24-2.3 SRM200-02(4) SRM200-03(4) SRM200-04(4) SRM200-05(4)	PTM28-1.4 PTM28-2		QSA48-1.2(2)	
SLC20-2.75B	PTM24-4 SLC24-4B	PTM28-3.5		SSD48-4	
SLC20-5B SLC20-7.5B	SLC24-6B PTM24-6.8 SSD24-8.5 STM24-8.5 SLC24-8.3B	PTM28-6 SSD28-7 STM28-7 SLC28-10B	SSD36-5 SSD36-8	STM48-10	
	SSD24-13 SLC24-12.5B	SSD28-11 STM28-11		STM48-14	
		STM28-18			
	STM24-21 STM24-28 SSD24-22	STM28-24			

Power Instruments Selection Chart

Amps	Voltage Range V dc 0 - 7	V dc 0 - 10	V dc 0 - 15	V dc 0 - 20	V dc 0 - 30	V dc 0 - 40
0 - 2.5			QRD 15-2	QRL 20-1.5D*	QRD 30-1	QRD 40-.75 QRD 40-2
2.6 - 5.0	QRL 7.5-3D*			QRD 20-4		
6 - 10						SRL 40-6
11 - 30		SRL 10-25		SRL 20-12 SRL 20-25 DCR 20-25B		SRL 40-12 DCR 40-13B SRL 40-25 DCR 40-25B
31 - 50		DCR 10-40B SRL 10-50		SRL 20-50 DCR 20-50B		DCR 40-40B SRL 40-50
51 - 80		DCR 10-80B		DCR 20-80B		DCR 40-70B
81 - 100		SRL 10-100				
101 - 250		DCR 10-120B		DCR 20-115B DCR 20-250A		DCR 40-125A DCR 40-250A
251 - 500	DCR 7-300B			DCR 20-500A		DCR 40-500A
501 - 1000				DCR 20-1000A		

Amps	Voltage Range V dc 0 - 60	V dc 0 - 80	V dc 0 - 150	V dc 0 - 300	V dc 0 - 600
0 - 2.5	QRD 60-.5 QRD 60-1.5			DCR 300-1.5B	DCR600-.75B DCR 600-1.5B
2.6 - 5.0	SRL 60-4		DCR 150-3B	DCR 300-3B	DCR 600-3B DCR 600-4.5B
6 - 10	SRL 60-8 DCR 60-9B	DCR 80-6B	DCR 150-6B	DCR 300-6B DCR 300-9B	
11 - 30	SRL 60-17 DCR 60-18B DCR 60-30B	DCR 80-12B	DCR 150-12B DCR 150-18B	DCR 300-18A	DCR 600-18A
31 - 50	SRL 60-35 DCR 60-45B	DCR 80-33B	DCR 150-35A	DCR 300-35A	
51 - 80			DCR 150-70A		

*Dual output power supplies

SORENSEN
RAYTHEON
Sorensen Company, 676 Island Pond Road, Manchester, NH 03103 USA (603) 668-4500 TWX 710-220-1339

SORENSEN

High Power Switching Power Supplies
SSD Series

- 15 models, 5V to 48V dc with power levels up to 1125 watts
- 115/230V ac or 255-345V dc input
- Wide range output voltage adjustment
- Built-in adjustable overvoltage protection on all models
- Remote programming
- Remote sensing
- Logic shutdown for system applications
- Adjustable Current Limiting
- Low ripple and noise through the use of double stage filtering
- Hold-up time typically 80ms half load, 40ms full load
- U.L. listing on Case III models
- 5 year warranty

The SSD Series offers 115/220V ac input selectable from the terminal board.

Specifications

INPUT

Voltage:
98-132V ac single phase
196-264V ac single phase
255-345V dc
SSD 5-225 (1,000 Watt unit):
105-125V ac single phase
210-250V ac single phase
275-325V dc

Frequency:
47-440 Hz operation
without derating
360-440 Hz (double rms ripple spec)

OUTPUT

Regulation:
Line: 0.01% + 1mV
Load: 0.01% + 1mV

Ripple:
Case III and IIIA
Typical: 5mV rms, 20mV pk-pk
Maximum: 8mV rms, 50mV pk-pk
Case IVB
Typical: 12mV rms, 60mV pk-pk
Maximum: 15mV rms, 75mV pk-pk
Case X (SSD 5-225)
Typical: 7mV rms, 80mV pk-pk
Maximum: 10mV rms, 100mV pk-pk

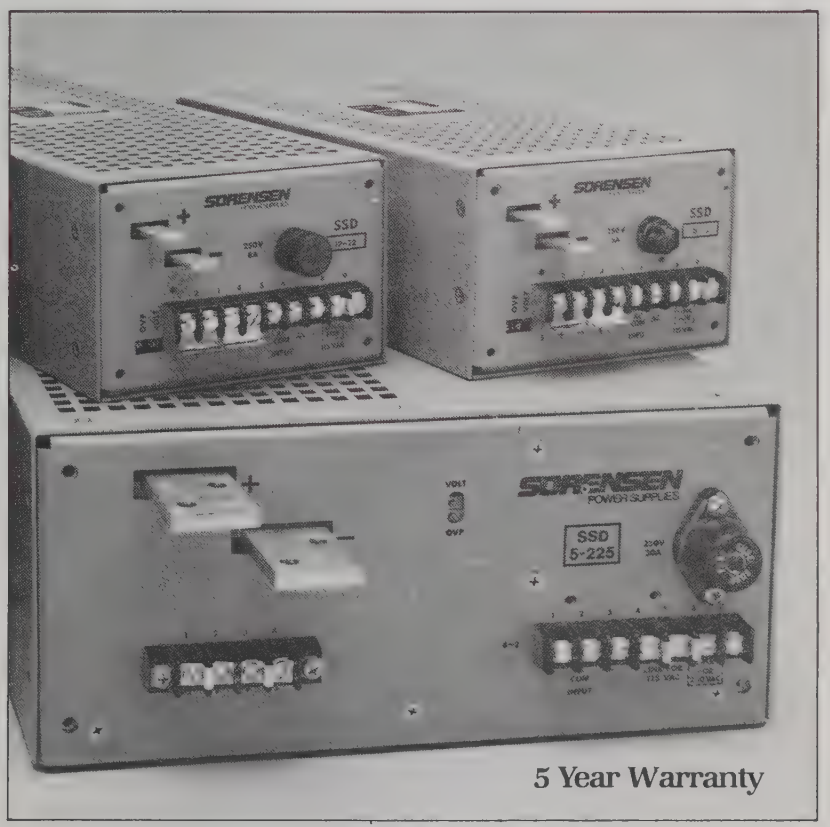

5 Year Warranty

SSD Series
Model Specifications

Temperature Coefficient:
0.01% maximum per°C

Stability:
0.05% maximum for 24 hours after warm-up of 30 minutes

Transient Response Time:
Output voltage returns to within 1% in less than 1.5ms following a step load change of 25% to 75% or 75% to 25%.

Overshoot:
Less than 1% on turn-on, turn-off or power failure.

Overvoltage Protection:
Built-in, adjustable overvoltage protection standard on all models.

Current Limiting:
Automatic, internally adjustable

OPERATING DATA

Efficiency:
65 to 80% depending on model.

Remote Sensing:
Terminals are provided on barrier strip. As long as terminal voltage remains within specified range, there are no basic limitations on load lead drop.

Remote Programming:
Resistance remote programming
1000 ohm/volt
Voltage remote programming
volt/volt

Remote Shutdown:
Output voltage can be shut down by placing 100 ohms or less in shutdown circuit. TTL compatible.

Series Operation:
Up to 100V dc maximum output.

Parallel Operation:
May be directly paralleled without derating.

Soft-Start:
In-rush current is limited by soft-start circuit.

Isolation:
2.1kV dc input to chassis
2.1kV dc input to output
500V dc output to chassis

Ambient Operating Temperature Range:
0 to 70°C

Storage temperature Range:
–55 to +85°C

Cooling:
Convection cooled (exception: SSD 5-225 is fan cooled).

Finish:
Textured blue thermal paint.

Model	Nominal Output Voltage V dc	Output Voltage Adjustment V dc		Output Current A dc				Case
		Min.	Max.	40°C	50°C	60°C	70°C	
SSD 5-30	5	4.7	5.5	30.0	27.0	22.5	15.0	III
SSD 5-45	5	4.7	5.5	45.0	40.5	32.8	22.5	IIIA
SSD 5-75	5	4.7	5.5	75.0	67.5	56.2	37.5	IVB
SSD 5-225	5	4.75	5.25	225.0	200.0	165.0	110.0	X (1)
SSD 12-15	12	10.0	13.0	15.0	13.5	11.2	7.5	III
SSD 12-22	12	10.0	13.0	22.0	19.8	16.5	11.0	IIIA
SSD 15-12	15	13.0	17.0	12.0	10.8	9.0	6.0	III
SSD 24-8.5	24	20.0	25.0	8.5	7.6	6.3	4.2	III
SSD 24-13	24	20.0	25.0	13.0	11.7	9.8	6.5	IIIA
SSD 24-22	24	20.0	25.0	22.0	19.8	16.5	11.0	IVB
SSD 28-7	28	25.0	30.0	7.0	6.3	5.2	3.5	III
SSD 28-11	28	25.0	30.0	11.0	9.9	8.3	5.5	IIIA
SSD 36-5	36	32.0	40.0	5.0	4.5	3.7	2.5	III
SSD 36-8	36	32.0	40.0	8.0	7.5	6.0	4.0	IIIA
SSD 48-4	48	42.0	54.0	4.0	3.6	3.0	2.0	III

Specifications subject to change without notice.
(1) **Case X (SSD5-225) dimensions:**
Height 4.94 (125mm), Width 11.25 (286mm), Length 16.5 (419mm), Weight 31 lb. (14 Kg).

CASE III

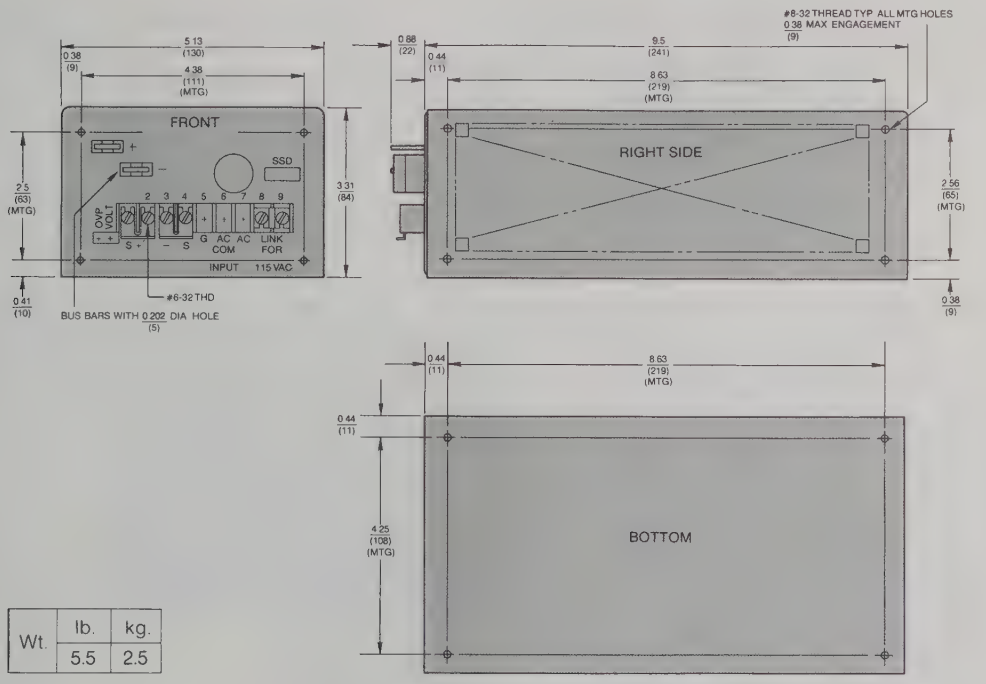

Wt.	lb.	kg.
	5.5	2.5

CASE IIIA

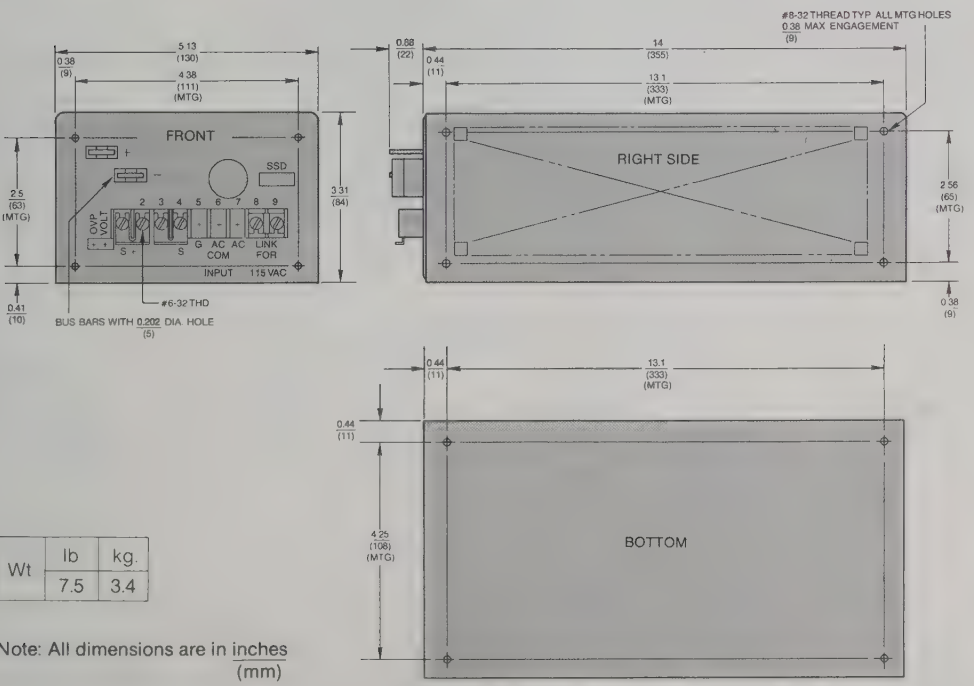

Wt	lb	kg.
	7.5	3.4

Note: All dimensions are in inches
(mm)

SSD Series
Dimensional Drawings

CASE IVB

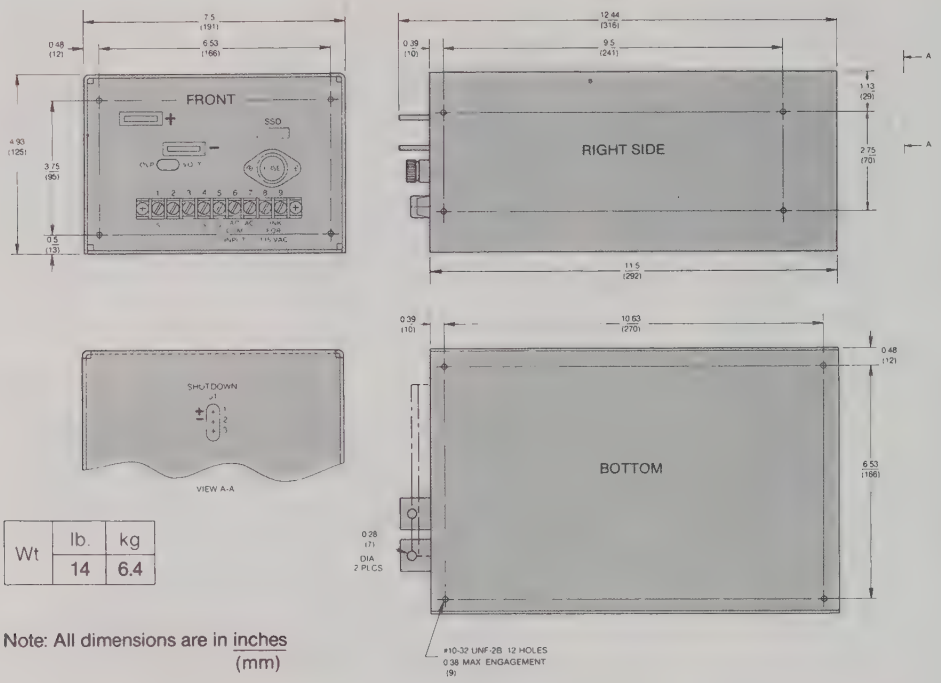

Wt	lb.	kg
	14	6.4

Note: All dimensions are in inches (mm)

SSD Series Input Data

Maximum Input Current

Nominal Input Voltage	Case III Amperes	Case IIIA Amperes	Case IVB Amperes	Case X Amperes
115V ac	4.2	5.5	7.0	23.0
208/220/230V ac	2.3	3.0	3.5	11.5
300V dc	1.0	1.5	2.7	8.7

Input Ratings, Typical Efficiency

Case III		Case IIIA		Case IVB		Case X	
SSD Model #	Efficiency %	SSD Model #	Efficiency %	SSD Model #	Efficiency %	SSD Model #	Efficiency %
5-30	68	5-45	68	5-75	72	5-225	69
12-15	75	12-22	75				
15-12	70						
				24-22	74		
24-8.5	75	24-13	75				
28-7	75	28-11	75				
36-5	77						
48-4	78	36-8	75				

Input ratings at nominal line, nominal adjustment, full load (@40°C).
Typically 2 to 4% higher at high adjustment, full load.

High Efficiency Switching Power Supplies
STM Series

- 18 models. 5V to 48V dc with power levels up to 672 watts
- 105-132V ac or 127-173V dc input
- Wide range output voltage adjustment
- Built-in adjustable overvoltage protection on all models
- Remote programming
- Remote sensing
- Adjustable Current Limiting
- Low ripple and noise
- 5 year warranty

The STM series offers all output voltages from 5V to 48V dc. Output voltage adjustment ranges on the STM offer a designer the flexibility to match a wide variety of load characteristics.

Specifications

INPUT

Voltage:
105-132V ac single phase or
127-173V dc

Frequency:
50-440 Hz operation without derating

OUTPUT

Regulation:
Line: 0.025% + 1mV
Load: 0.025% + 1mV

Ripple:
Typical: 5mV rms, 30mV pk-pk
Maximum: 10mV rms, 50mV pk-pk

Temperature Coefficient:
0.01% maximum per°C

Stability:
0.05% for 24 hours after warm-up of 30 minutes.

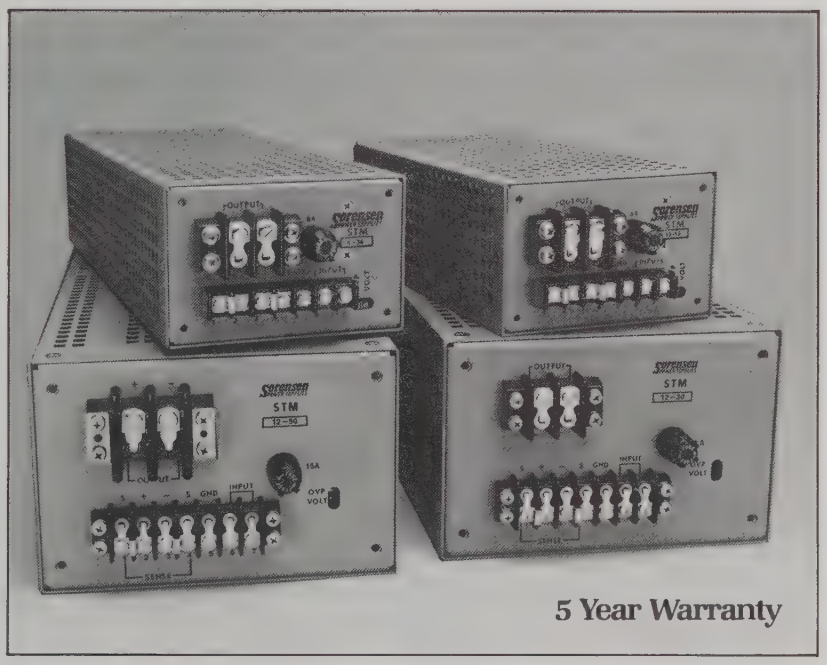

5 Year Warranty

STM Series
Model Specifications

Transient Response Time:
Output voltage returns to within ±1% in less than 1ms following a step-load change for either 50% to 100% or 100% to 50% of full load.

Overshoot:
No overshoot on turn-on, turn-off or power failure.

Hold-up Time:
Full regulated voltage holds up for 15ms after removal of power at full load and nominal input and output voltages. (30ms for half load).

Overvoltage Protection:
Built-in, adjustable overvoltage protection standard on all models.

Current Limiting:
Automatic, internally adjustable.

OPERATING DATA

Efficiency:
64 to 78% depending on model.

Remote Sensing:
Terminals are provided on barrier strip. As long as terminal voltage does not exceed maximum output rating there are no basic limitations on load lead drop.

Remote Programming:
Resistance remote programming; 1000 ohm/volt
Voltage remote programming volt/volt

Series Operation:
200V dc maximum output.

Parallel Operation:
May be directly paralleled without derating.

Soft-Start:
In-rush current is limited by soft-start circuit.

Isolation:
1.3kV dc input to chassis.
300V dc ouput to chassis.

Ambient Operating Temperature Range:
0 to +70°C.

Storage temperature Range:
–40 to +85°C

Cooling:
Convection cooled.

Finish:
Textured blue thermal paint.

Model	Nominal Output Voltage V dc	Output Voltage Adjustment V dc Min.	Max.	Output Current A dc 40°C	50°C	60°C	70°C	Case
STM 5-24	5.0	4.5	6.0	24.0	19.4	14.9	9.6	III
STM 5-36	5.0	4.5	6.0	36.0	29.1	22.3	14.4	IIIA
STM 5-60	5.0	4.5	6.0	60.0	48.0	36.0	24.0	IVA
STM 5-100	5.0	4.5	6.0	100.0	80.0	60.0	40.0	VI
STM 12-12	12.0	9.5	13.5	12.0	9.7	7.5	4.8	III
STM 12-20	12.0	9.5	13.5	20.0	16.2	12.4	8.0	IIIA
STM 12-30	12.0	9.5	13.5	30.0	24.0	18.0	12.0	IVA
STM 12-50	12.0	9.5	13.5	50.0	40.0	30.0	20.0	VI
STM 15-24	15.0	13.0	17.0	24.0	19.2	14.4	9.6	IVA
STM 15-32	15.0	13.0	17.0	32.0	25.6	19.2	12.8	VI
STM 24-8.5	24.0	19.0	25.0	8.5	6.8	5.3	3.4	III
STM 24-21	24.0	19.0	25.0	21.0	16.8	12.6	8.4	IVA
STM 24-28	24.0	19.0	25.0	28.0	22.4	16.8	11.2	VI
STM 28-7	28.0	24.0	30.0	7.0	5.6	4.3	2.8	III
STM 28-11	28.0	24.0	30.0	11.0	8.9	6.8	4.4	IIIA
STM 28-24	28.0	24.0	30.0	24.0	19.2	14.4	9.6	VI
STM 48-10	48.0	42.0	56.0	10.0	8.0	6.0	4.0	IVA
STM 48-14	48.0	42.0	56.0	14.0	11.2	8.4	5.6	VI

Specifications subject to change without notice.

STM Series
Maximum Input Current

Nominal Input Voltage	Case III Amperes	Case IIIA Amperes	Case IVA Amperes	Case VI Amperes
115V ac	4.0	5.5	9.1	12.8
150V dc	1.9	3.2	4.8	6.7

Input Ratings, Typical Efficiency

Case III		Case IIIA		Case IVA		Case VI	
STM Model #	Efficiency %	STM Model #	Efficiency %	STM Model #	Efficiency %	STM Model #	Efficiency %
5-24	64	5-36	64	5-60	65	5-100	65
12-12	70	12-20	70	12-30	72	12-50	72
24-8.5	73	28-11	73	15-24	72	15-32	72
28-7	73			24-21	74	24-28	74
				48-10	78	28-24	76
						48-14	78

STM Series
Dimensional Drawings

CASE III and IIIA

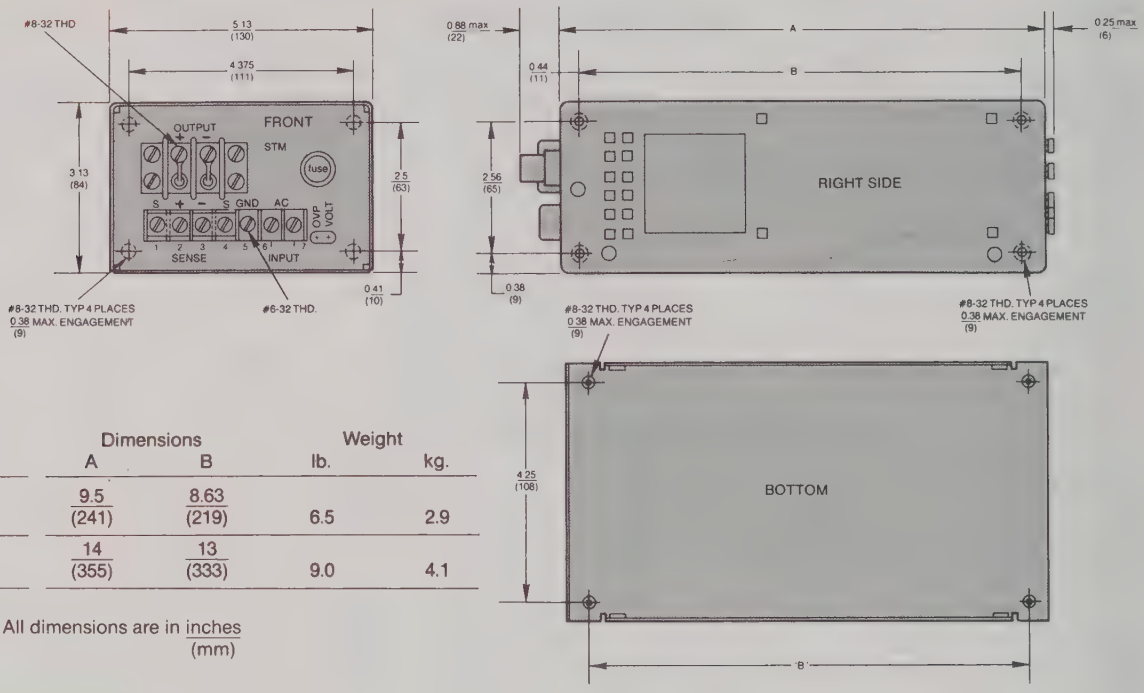

Case	Dimensions A	Dimensions B	Weight lb.	Weight kg.
III	9.5 (241)	8.63 (219)	6.5	2.9
IIIA	14 (355)	13 (333)	9.0	4.1

Note: All dimensions are in inches (mm)

CASE IVA and VI

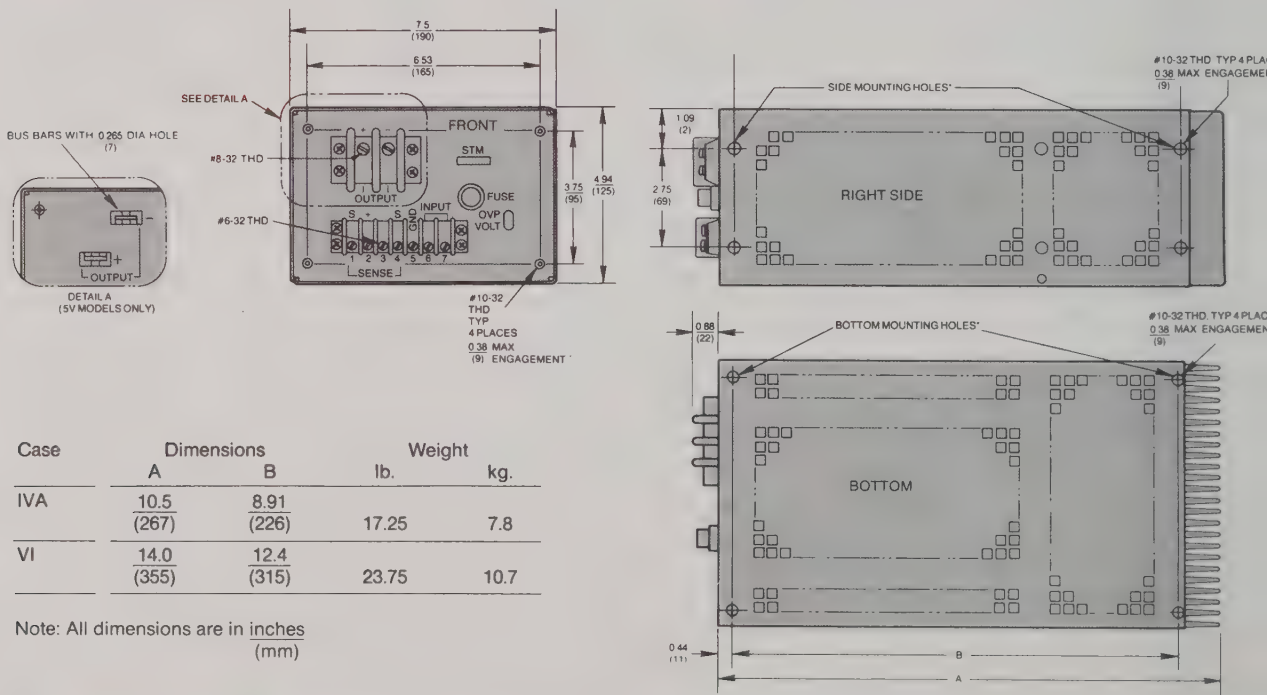

Case	Dimensions A	Dimensions B	Weight lb.	Weight kg.
IVA	10.5 (267)	8.91 (226)	17.25	7.8
VI	14.0 (355)	12.4 (315)	23.75	10.7

Note: All dimensions are in inches (mm)

SORENSEN
RAYTHEON
Sorensen Company, 676 Island Pond Road, Manchester, NH 03103 USA (603) 668-4500 TWX 710-220-1339

Dual ac and dc Input Switching Power Supplies
SLC-B Series

SORENSEN

- 27 single output models. 5V to 28V dc with power levels up to 300 watts
- 115V ac or 230V ac input
- Built-in overload and overvoltage protection
- High efficiency (up to 77%)
- Remote sensing
- Remote shutdown
- 5 year warranty

With up to 2 watts per cubic inch power density and two mounting surfaces, the SLC-B series is ideal for high density electronic package usage.

Specifications

INPUT

Voltage:
90-127V ac and 180-254V ac

Frequency:
47-440 Hz operation without derating

Start Up Time:
150ms (typical)

In-rush Current (typical)

30W/7A	150W/24A
55W/12A	200W/36A
100W/18A	300W/50A

OUTPUT

Regulation:
Line: 0.2% max. (0.1% for 300W models).
Load: 0.2% (max.): No load to full load
0.3% (max. 300W models): No load to full load.

Output Ripple and Noise (PARD):
50mV pk-pk maximum for 5V models.
100mV pk-pk maximum for 12-28V models.

Drift:
0.2% maximum over an 8 hour period after 30 minute warm up with constant line, load and ambient.

Temperature Coefficient:
±0.02%/°C
±0.01%/°C for 300W models.

Transient Response Time:
1.0ms typical (50% to 100% load) with maximum excursion of ± 3% up to 150W and ± 4% for 200W and above.

5 Year Warranty

SLC-B Series
Model Specifications

Overshoot:
No overshoot on turn-on, turn-off or power failure.

Remote Sensing:
Capable of maintaining nominal voltage at the load; compensating for a load-lead voltage drop of up to 10%.

Overload Protection:
Automatic Current Limiting (ACL) takes effect at 110-130% of maximum rated current and limits the output to a safe load.

Overvoltage Protection:
Overvoltage condition detected at 120-140% of nominal output voltage.

Dielectric Isolation:
Input/output, input/ground (case) 1,500V ac for one minute.
Output/ground (case) 500V dc for one minute.
Input/output, input/case, output/case 30 megohms.

Hold-up Time:
20ms typical for full load, nominal line (40ms for 300W models)

Electro Magnetic Interference:
SLC series meet FCC Class A and VDE 0871A level when used with the following Corcom filters:

Corcom Model 3EP3 suitable for use with 30, 55, 100 and 150 W models.

Corcom Model 6EP3 suitable for use with 200 and 300 W models.

Ambient Operating Temperature Range:
Full load rating from -10°C to 50°C. Derate per table.

Storage Temperature Range:
-25 to +85°C

Cooling:
Convection cooled.

Efficiency:

30W	63%	150W	74%
55W	71%	200W	75%
100W	73%	300W	77%

Finish:
Blue Thermal paint.

Model	Nominal Output Voltage V dc (Adj. ± 10%)	Output Current A dc 50°C	60°C	70°C	Case
SLC 5-6B	5	6.0	4.5	3.0	1A
SLC 5-11B	5	11.0	8.25	5.5	1B
SLC 5-20B	5	20.0	15.0	10.0	2A
SLC 5-30B	5	30.0	22.5	15.0	2B
SLC 5-40B	5	40.0	30.0	20.0	3
SLC 5-60B	5	60.0	45.0	30.0	4
SLC 12-2.5B	12	2.5	1.88	1.25	1A
SLC 12-4.5B	12	4.5	3.38	2.25	1B
SLC 12-8B	12	8.0	6.0	4.0	2A
SLC 12-12B	12	12.0	9.0	6.0	2B
SLC 12-16.7B	12	16.7	12.53	8.3	3
SLC 12-25B	12	25.0	18.75	12.5	4
SLC 15-2B	15	2.0	1.5	1.0	1A
SLC 15-3.6B	15	3.6	2.7	1.8	1B
SLC 15-10B	15	10.0	7.5	5.0	2B
SLC 15-13.3B	15	13.3	9.98	6.65	3
SLC 20-1.5B	20	1.5	1.125	0.75	1A
SLC 20-2.75B	20	2.75	2.0	1.38	1B
SLC 20-5B	20	5.0	3.75	2.5	2A
SLC 20-7.5B	20	7.5	5.63	3.75	2B
SLC 24-1.2B	24	1.2	0.9	0.6	1A
SLC 24-2.2B	24	2.2	1.65	1.1	1B
SLC 24-4B	24	4.0	3.0	2.0	2A
SLC 24-6B	24	6.0	4.5	3.0	2B
SLC 24-8.3B	24	8.3	6.22	4.15	3
SLC 24-12.5B	24	12.5	9.38	6.25	4
SLC 28-10B	28	10.0	7.5	5.0	4

Specifications subject to change without notice.

CASE 1

Maximum Input Current

Nominal Input Voltage	Case 1A Amperes	Case 1B Amperes	Case 2A Amperes	Case 2B Amperes	Case 3 Amperes	Case 4 Amperes
115V ac	0.68	1.1	2.0	2.9	3.9	5.7
230V ac	0.34	0.55	1.0	1.5	2.0	2.9

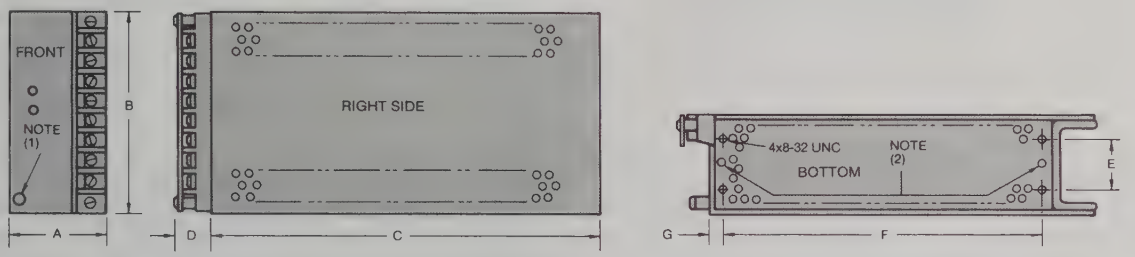

Dimensions

Case No.	Weight lb.	Weight kg.	A in.	A mm	B in.	B mm	C in.	C mm	D in.	D mm	E in.	E mm	F in.	F mm	G in.	G mm
1A	1.5	0.7	1.30	(33)	3.94	(100)	7.88	(200)	0.88	(22)	Note 2		6.69	(170)	0.16	(4)
1B	3.0	0.9	1.93	(49)	3.94	(100)	7.88	(200)	0.88	(22)	0.98	(25)	6.69	(170)	0.16	(4)

Note (1) Grounding lug on 30W and 55W models. Mounting holes located top and bottom.
Note (2) Two centered mounting holes located top and bottom of 30W models only.
All terminal screws are 6-32
Specifications subject to change without notice.

CASE 2

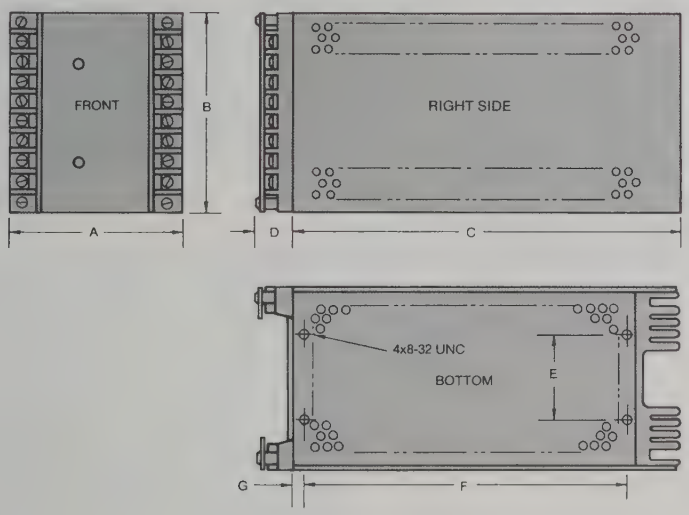

Dimensions

Case No.	Weight lb.	Weight kg.	A in.	A mm	B in.	B mm	C in.	C mm	D in.	D mm	E in.	E mm	F in.	F mm	G in.	G mm
2A	3.0	1.4	3.44	(87)	3.94	(100)	7.88	(200)	0.88	(22)	1.65	(42)	6.69	(170)	0.16	(4)
2B	4.2	1.9	5.25	(133)	3.94	(100)	7.88	(200)	0.88	(22)	3.5	(89)	6.69	(170)	0.16	(4)

All terminal screws are 6-32

SLC-B Series
Dimensional Drawings

CASE 3

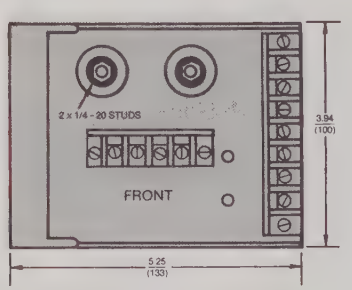

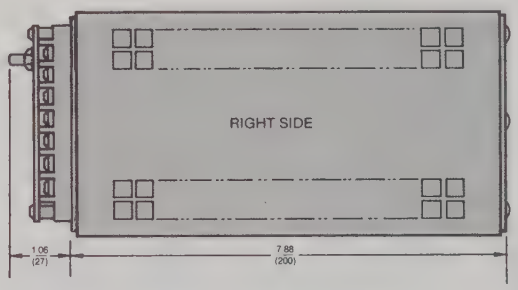

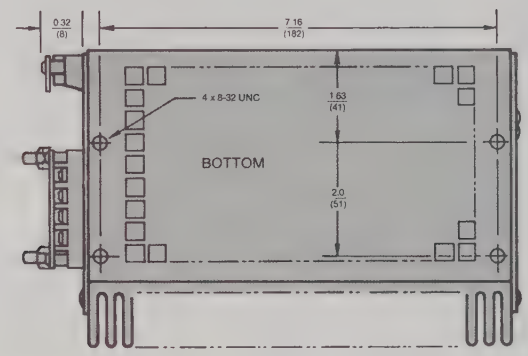

Wt.	lb.	kg
	4.2	1.9

Terminal screws are 6-32.

Note: All dimensions are in inches (mm)

CASE 4

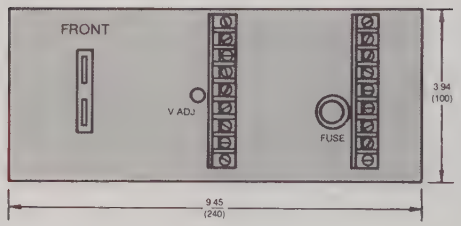

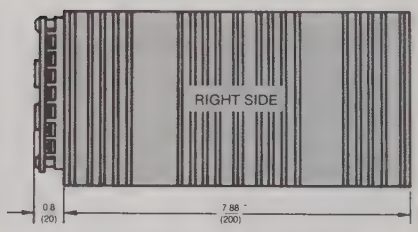

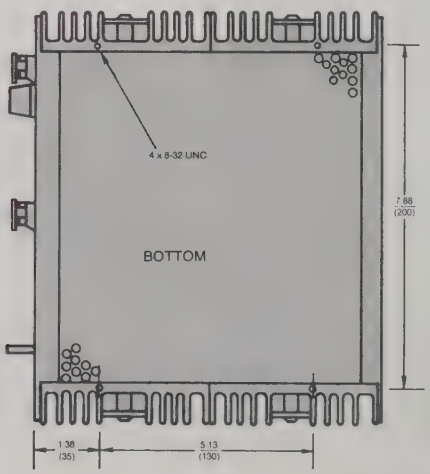

Wt.	lb.	kg.
	7.9	3.6

Terminal screws are 6-32.

Note: All dimensions are in inches (mm)

SORENSEN
RAYTHEON
Sorensen Company, 676 Island Pond Road, Manchester, NH 03103 USA (603) 668-4500 TWX 710-220-1339

Triple-Output Switching Power Supplies
SLT5/SLT0 Series

- 6 Triple-output models. 5V with various combinations of 12 and 15V dc. Power levels of 40 or 80 watts.
- 115V ac (±10%) for SLT-0 series
- 115V or 230V ac (–20% +10%) for SLT-5 series.
- Adjustable output voltage.
- High efficiency (65% typical)
- 5 year warranty.

The SLT5/SLT0 series offer high efficiency (65% typical), adjustable output voltage and both overload and overvoltage protection.

Specifications

The SLT-5 series is rated for either 115V ac or 230V ac (–20% +10%) input. When the power supply is operating normally the voltages will be present at the output terminals. For the SLT-5 series there are additional red LED indicator lights on the front panel of each output. A minimum load on the 5 volt output of 10% of rated current is required to meet full regulation specifications.

The SLT-0 series is designed for 115V ac (±10%) input. An additional 6.3V ac output is available for microprocessor power fail circuitry. Maximum output current rating is 0.1 Amp.

Both multi-output series contain voltage output adjustments, factory set OVP and ACL overload protection.

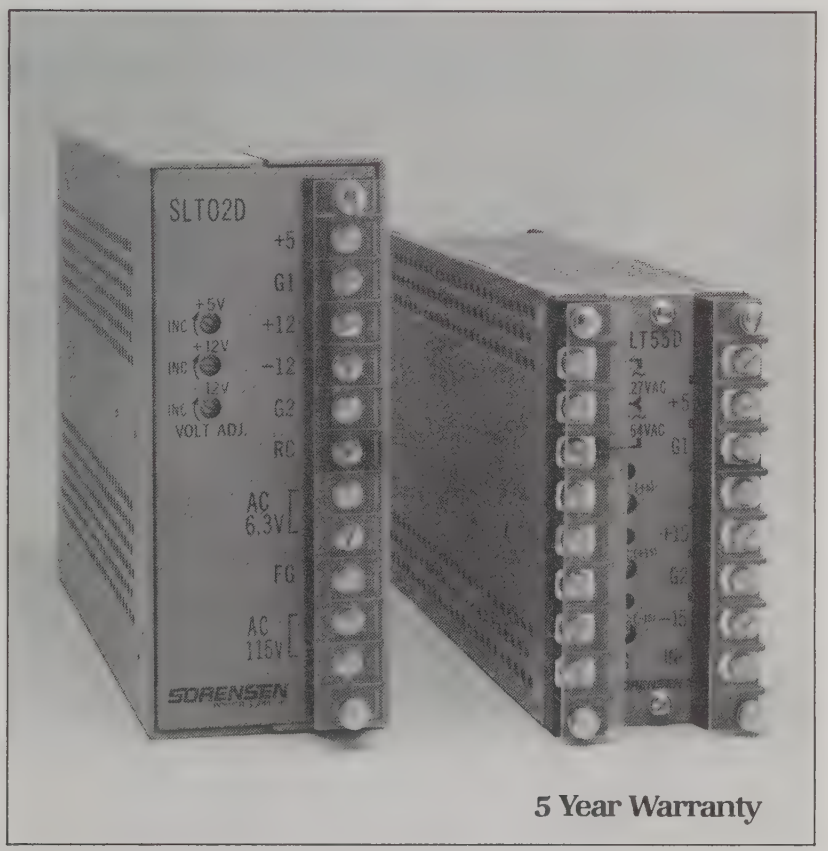

5 Year Warranty

SLT5/SLT0 Series
Model Specifications

INPUT

Voltage:
SLT5: 90-127V ac and 180-254V ac (-20% +10%).
SLT0: 115V ac ± 10%
Frequency 47-440 Hz.

In-rush Current:
10A typical.

OUTPUT

Line Regulation:
SLT5: 0.3% (max.) +5V output only 0.5% (max.) other outputs.
SLT0: 0.3% (max.)

Load Regulation:
SLT5: 0.5% (max.) +5V output 1% (max.) other outputs.
SLT0: 0.8% (max.)

Output Ripple and Noise (PARD):
50mV pk-pk typical, 100mV pk-pk maximum.

Temperature Coefficient:
±0.02%/°C

Overload Protection:
Automatic Current Limiting (ACL) takes effect at 110-130% of maximum rated current and limits the output to a safe level.

Overvoltage Protection:
Overvoltage condition detected at 120-140% of nominal output voltage.

Dielectric Isolation:
Input/output; input/ground: 1500V ac for one minute.
Output/ground: 500V dc for one minute.

Hold-up Time:
20ms typical at full load and nominal input voltage.

Efficiency:
65% typical.

Ambient Operating Temperature Range:
Full load 0° to 50°C.
Derate to 50% @ 70°C.

Storage Temperature Range:
-25°C to +85°C

Cooling:
Convection cooled.

Finish:
Blue Thermal paint.

Model	Voltage dc, Adjustable ± 10% Output #1	Output #2	Output #3	Case
SLT-52D	5V/5A	+12V/0.5A	-12V/0.5A	5
SLT-525	5V/5A	+12V/0.5A	- 5V/0.5A	5
SLT-55D	5V/5A	+15V/0.5A	-15V/0.5A	5
SLT-02D	5V/10A	+12V/1A	-12V/1A	0
SLT-025	5V/10A	+12V/1A	- 5V/1A	0
SLT-05D	5V/10A	+15V/1A	-15V/1A	0

Specifications subject to change without notice.

Maximum Input Current

Nominal Input Voltage	Case 5 Amperes	Case 0 Amperes
115V ac	0.9	1.8
230V ac	0.45	-

CASE 5

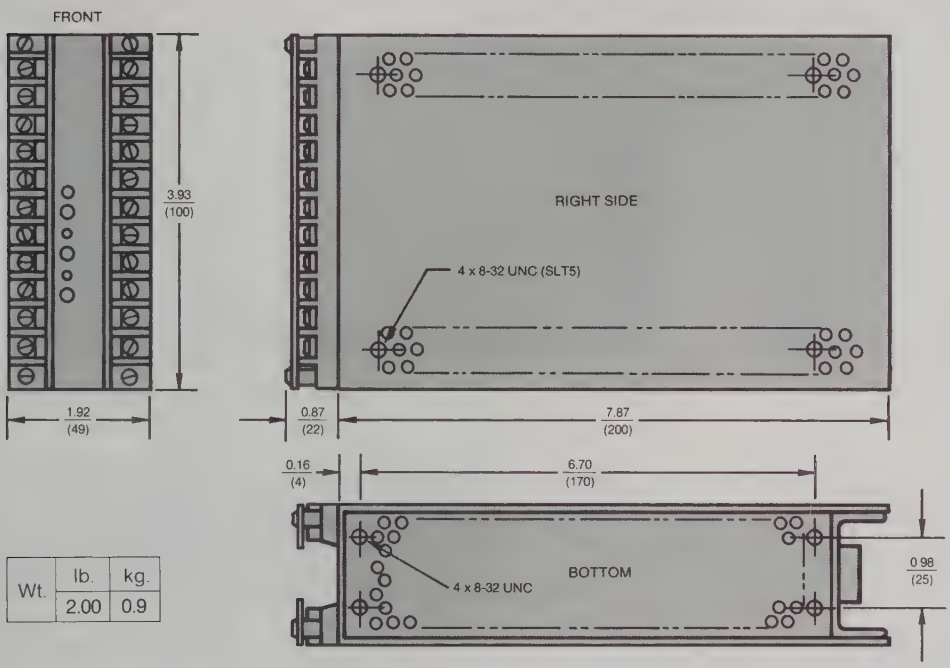

Wt.	lb.	kg.
	2.00	0.9

Terminal screws are 6-32.

Note: All dimensions are in inches (mm)

SLT0 Series
Dimensional Drawings

CASE 0

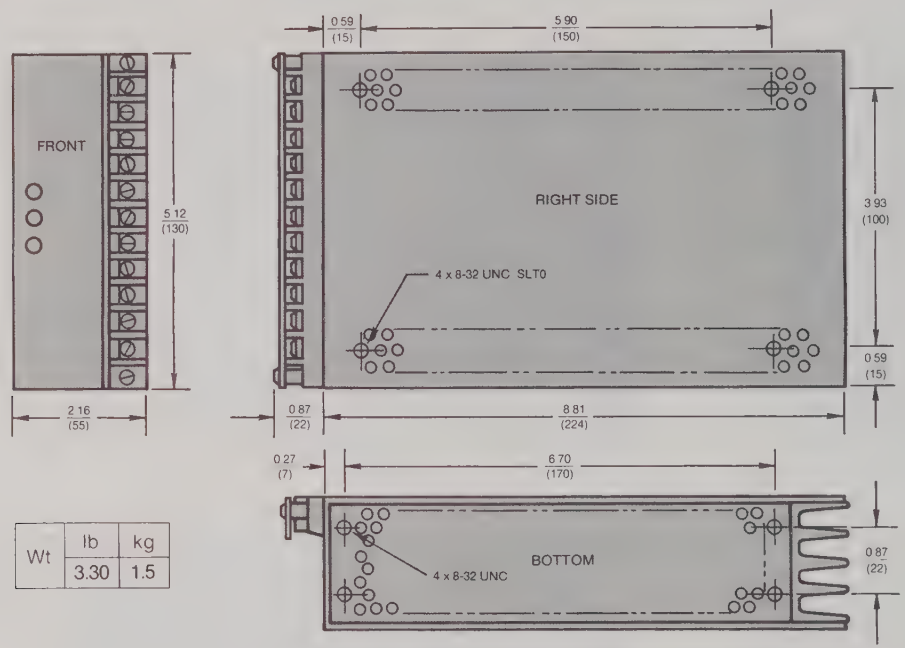

Wt	lb	kg
	3.30	1.5

Terminal screws are 6-32.

Note: All dimensions are in $\frac{\text{inches}}{(\text{mm})}$

SORENSEN
RAYTHEON
Sorensen Company, 676 Island Pond Road, Manchester, NH 03103 USA (603) 668-4500 TWX 710-220-1339

High Power Density Switching Power Supplies

SRX Series

- LED mode indicators
- Internal fan cooling
- High power density (2.47 watts per cubic inch)
- External crowbar drive
- High efficiency (75% typical)
- Remote sensing
- Overload protection
- Overvoltage protection
- Overtemperature protection
- AC failure flag
- Remote on/off control
- UL, CSA and VDE input connector
- Sturdy output busbar connection
- Industry standard case size
- U.L. listed, CSA certified
- 5 year warranty

The SRX produces 1/3 more output power than comparable units. It achieves high performance and reliability at a low unit watts cost.

Sorensen SRX 5-200 units are designed to meet the ever increasing power demands of computers, memories and large digital systems. Although housed in an industry standard package, the SRX produces 1/3 more output power than comparable units. The high power density coupled with high efficiency (75%) and flexible mounting arrangement makes the SRX unit ideal for use in any electronic product requiring high density packaging.

The SRX standard unit includes many features normally offered as optional, i.e., LED mode indicators, internal fan cooling and digital interfacing. An additional plus is the Sorensen 5 year warranty.

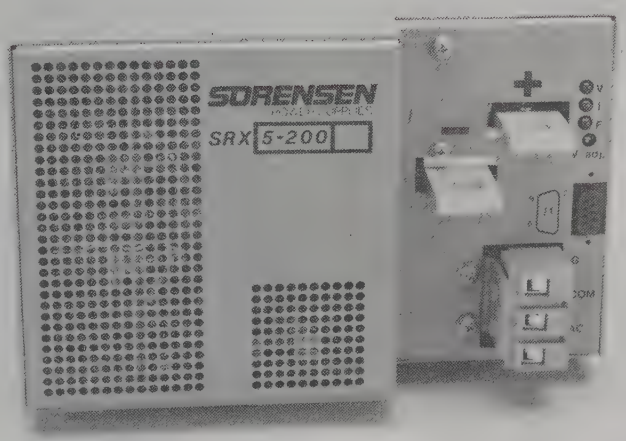

5 Year Warranty

SRX Series
Model 5-200 Specifications

INPUT
Voltage:
208/220/230V ac (190-250V ac)
Standard: Single phase, 47-63 Hz.
Optional: 115V ac (95-127V ac)
See next page.

OUTPUT
Voltage:
5.0V dc, adjustable range: 4.75 to 5.25V dc.

Current:
0 to 200A.

Regulation:
.1% maximum combined line and load variations within specified range.

Ripple and Noise:
15mV maximum rms ripple
50mV typical, 100mV maximum pk-pk ripple.

Efficiency:
75% typical.

Temperature Coefficient:
.015%/°C.

Long Term Stability:
±1% after 30 minute warm-up.

Hold Up Time:
40ms at nominal line and load.

Transient Response Time:
200μs maximum recovery to regulation bandwidth after a 50% step load change within 10 - 100% of full load. Maximum excursion ±4% and rate of step load; 2.5A per μs.

Overshoot:
Less than 1% overshoot on turn-on, turn-off or inhibit.

Remote Sensing:
Capable of maintaining regulation at the load, compensating for load-lead voltage drop of up to .25V.

AC Failure Flag
Logic low level flags ac power failure (14ms typical delay response). Flag sinks a maximum of 8mA and sources a minimum of .2mA.

On/Off Control:
Logic low level to inhibit.

Margin Check:
Open collector logic low level (0-.4V) on HI Margin to raise output 5% or on LO Margin to lower output 5%.

External Crowbar Drive:
100mA minimum drive for external SCR crowbar. Not furnished.

Overload Protection:
Automatic Current Limiting (ACL) adjustable from 0 to 110% of rated load. Foldback to approximately 70% under short-circuit.

Overvoltage Protection:
Fixed OVP trip point within range of 5.7 to 6.0V dc.

Overtemperature Protection:
Automatic shut-down under overtemperature operation.

Low Line Protection:
Automatic shutdown under continuous low input voltage.

Ambient Operating Temperature Range:
Full load rating from 0 to 50°C. Derate to 60% at 70°C. (See Figure 1).

Storage Temperature Range:
-55 to +85°C

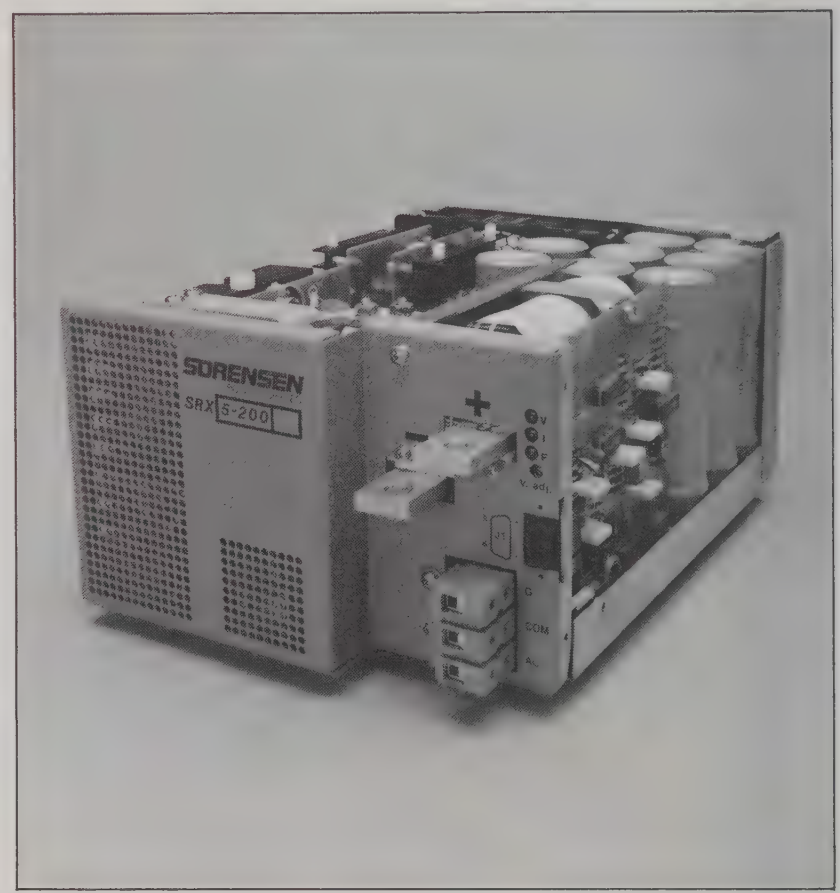

Model 5-200 Specifications

Isolation:
2.1kV dc between input and output and case 500V dc between output and case.

EMI Suppression:
Filters are incorporated for the suppression of conducted EMI.

Power Density:
2.47 watts per cubic inch.

Cooling:
Fan cooled.

Outline Dimensions:
Industry standard case size 5"H x 8"W x 11"L.

Mounting Dimensions:
Top and Bottom: 5.75" x 6.75"
Side: 4.00" x 6.75"
8-32 mounting screws, max. engagement .375"

Weight:
15 lbs.

Air Flow:
Standard Model intake from connector end and discharge at the opposite end. Reverse air flow optional feature (see below).

Input Connector:
Enclosed terminal strip (Weidmuller MK 6/3 4185.2). #10 AWG maximum.

Output Terminal:
Copper straps .25" thick x .875" wide, accepts 5/16" screw, maximum.

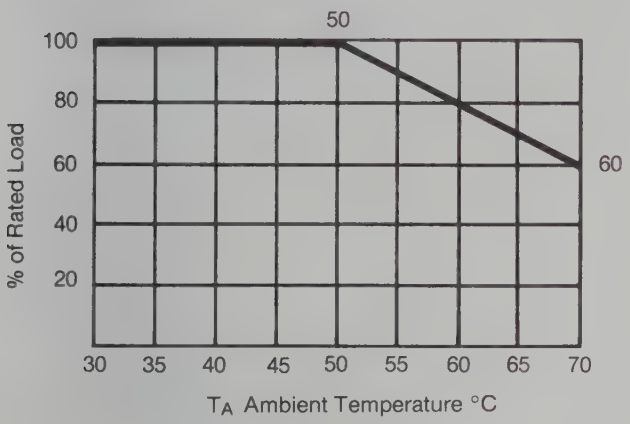

Power Derating Curve
(Figure 1)

Specifications subject to change without notice.

Maximum Input Current

Nominal Input Voltage	Amperes
115V ac	20
230V ac	10

Output Connector:
9 pin receptacle connector (AMP 207084-1).

Pin assignment:
1. AC Flag (return to -SEN)
2. +OUT
3. -Out
4. -SEN
5. +SEN
6. LO Margin (return to -SEN)
7. HI Margin (return to -SEN)
8. External crowbar drive (return to -Out)
9. Remote On/Off control (return to -SEN)

Finish:
Blue epoxy paint.

Optional Input Voltages and Air Flow
The standard unit, with 220V ac and standard air flow, is list priced.

Options:
115V ac, standard air flow; add suffix M1.

115V ac, reversed air flow; add suffix M2.

220V ac, reversed air flow; add suffix M3.

For voltage and air flow option add proper suffix to model number.
Example: SRX5-200M1

SRX Series
Dimensional Drawings

Model SRX 5-200

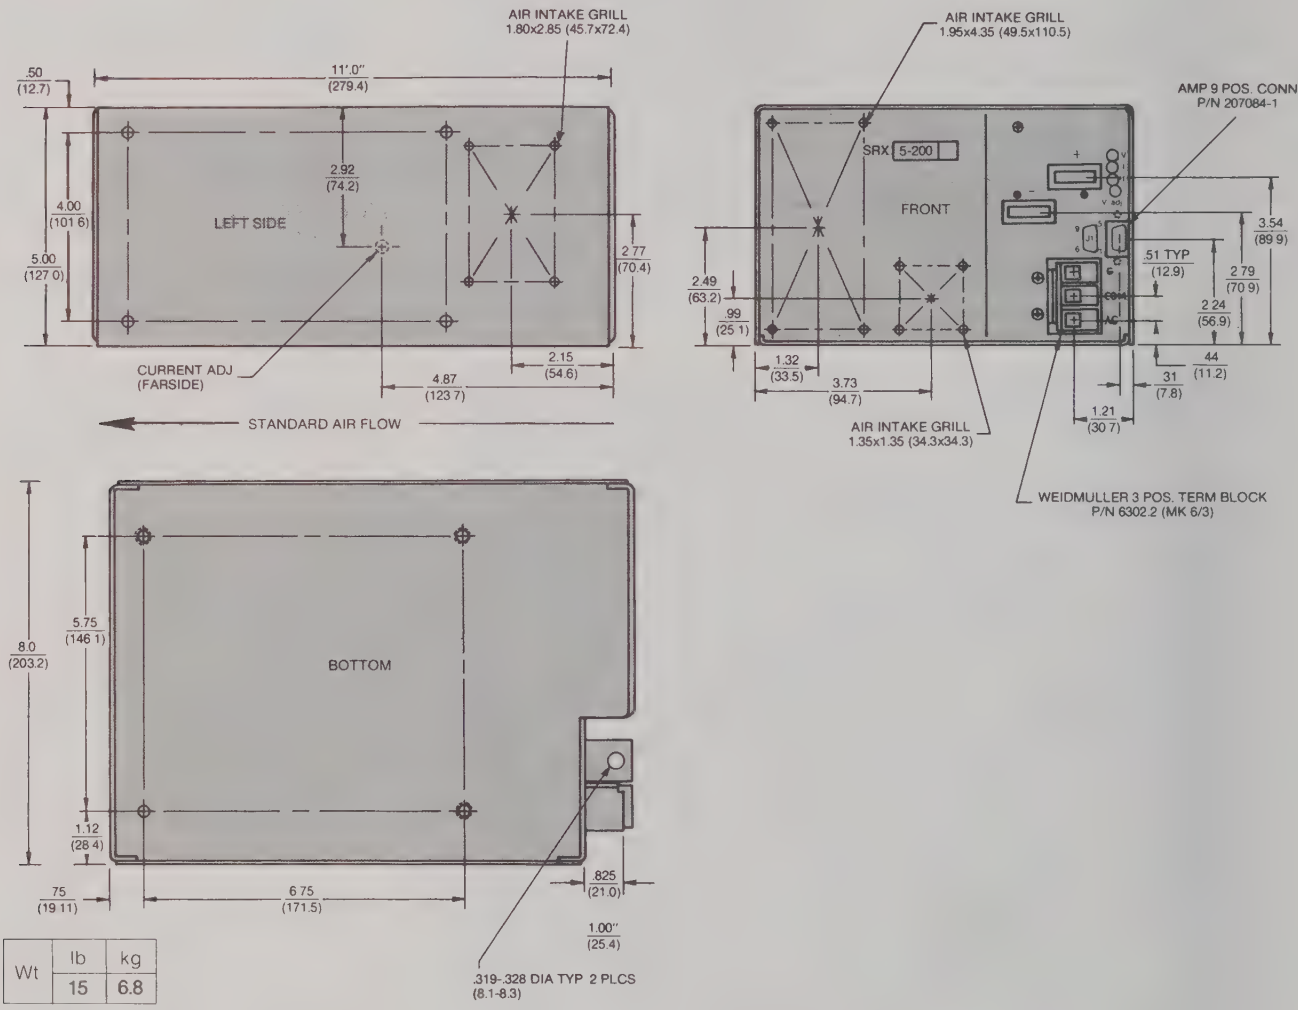

Wt	lb	kg
	15	6.8

Note: All dimensions are in inches (mm)

Note: Standard model shown. See preceding page for optional air flow information.

SORENSEN
RAYTHEON
Sorensen Company, 676 Island Pond Road, Manchester, NH 03103 USA (603) 668-4500 TWX 710-220-1339

Open Frame, Multi-Output Switching Power Supplies
SRM Series

SORENSEN

- 6 basic output models, 5V with various combinations of ±12V, ±15V and a floating output of 5V or 24V dc.
- Power outputs to 200 watts.
- Fully or semi-regulated outputs.
- 115V and 230V ac input.
- Overvoltage protection.
- Undervoltage protection.
- Short circuit protection.
- High efficiency: 80% typical for semi-regulated supplies; 70% typical for fully regulated supplies.
- U.L. listed
- EMI: Input RFI filtering.
- Hold up time: 40 ms.
- 2 Year Warranty

OEM applications for the SRM series include mini and micro computers, terminal displays, floppy and hard disc units.

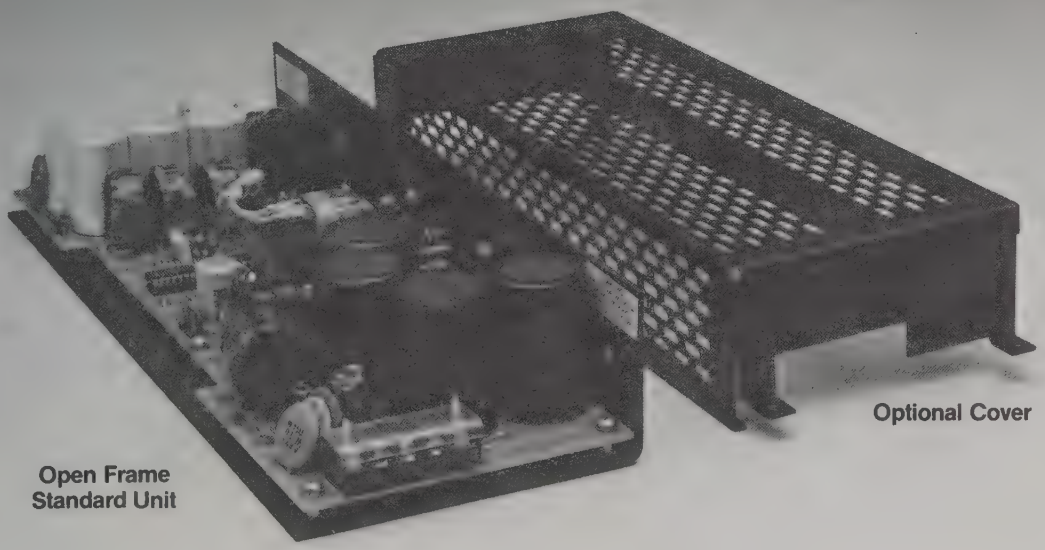

Optional Cover

Open Frame
Standard Unit

SRM Series
Model Specifications

INPUT

Voltage:
115 or 230V ac (90-132 or 180-264V ac). 47-63 Hz. Single phase.

Hold Up Time:
40ms, typical, after loss of nominal ac power with unit at maximum output power.

Overvoltage Protection:
Standard fixed OVP, for main output trips at 6V ±5%. OVP will shutdown all outputs.

Short Circuit Protection:
Main output and fully regulated auxiliary outputs have current foldback against short circuit.
Semi-regulated outputs are protected by fuses.

Inrush Current:
35A maximum @ 25°C.

AC Undervoltage Protection:
Automatic shutdown.

Operating Temperature Range:
0-40°C at full rated load. Derate output currents of fully regulated outputs from 100% @ 40°C to 50% @ 70°C.

Storage Temperature Range:
−40°C to +85°C.

Isolation:
2100V dc input to output and chassis ground.
500V dc output to chassis ground.

Efficiency:
70 to 80% typical at full load.

EMI:
Input RFI filtering designed in.

Safety:
SRM units designed to meet UL 478 and CSA 154 standards.

Outline Dimensions:
Open Frame units
2.5″H x 5.0″W x 14″L.

Covered units
2.56″H x 5.06″W x 14″L.

Weight:
4.25 lbs. typical
5.00 lbs. for regulated output including cover and heat sink.

Finish:
Black anodized.

Output Ratings, SRM Standard Models (See ordering information for options)

dc Output Type	No.	SRM200-01 Volt	Amp	Reg.	SRM200-02 Volt	Amp	Reg.	SRM200-03 Volt	Amp	Reg.	SRM200-04 Volt	Amp	Reg.	SRM200-05 Volt	Amp	Reg.	SRM200-06 Volt	Amp	Reg.
Main	1	+5	20*	F	+5	20*	F	+5	20*	F	+5	20.	F	+5	20.	F	+5	20.	F
Auxiliary	2	+12	4*	S	+12	4*	S	+15	4*	S	+12	1.5	F	+15	1.5	F	+12	1.5	F
Auxiliary	3	−12	4*	S	−12	4*	S	−15	4*	S	−12	1.5	F	−15	1.5	F	−12	1.5	F
Auxiliary	4	5	2*	S	24	2*	S	24	2*	S	24	2.	S	24	2.	S	5	1.5	F

Key: F = Fully Regulated against line and load changes. S = Semi Regulated against line changes only.

NOTE: IT IS IMPORTANT to maintain at least 25% of rated current in Main Output to keep auxiliary outputs from dropping out. At least 25% of rated current must be maintained in each Semi-Regulated output to keep it from voltage peaking. Main #1 and AUX #2 and #3 output share a common return. AUX #4 output has an isolated return.

*CAUTION: Total power output not to exceed 200 watts. Consult factory for other auxiliary outputs.

Operating Specifications, SRM Standard Models

Model SRM 200 Specifications	Main Output Fully Regulated	Auxiliary Output Fully Regulated			Auxiliary Output Semi-Regulated (See Note)			
Voltage Centering		5V	12V	15V	5V	12V	15V	24V
Nominal	5V dc (4.5-5.5V dc)	5.00	12.00	15.00	4.75	12.80	15.50	24.0
Tolerance	—	±2%	±2%	±2%	±2%	±2%	±2%	±2%
Current	5-20A	0-1.5A			0.5-2A	1-4A	1-4A	0.5-2A
Ripple	15mV rms, maximum 100mV pk-pk, max.	.1% rms, maximum 1.0% pk-pk, max.			10mV rms, maximum 2.0% pk-pk, max.			
Regulation								
Line	±.1% maximum	±.1%			±1.0%			
Load	1.0% maximum	1.0%			—			
Self loading	—	—			−4% 50-100% rated			
Cross loading	—	—			+6% 50-100% at main ±0.5% 50-100% at any other output			
Temperature Coefficient	±.01%/°C	±.01%/°C			±.05%/°C 5V		±.02%/°C All others	
Long Term Stability, 1000 hrs.	±.5%	±.5%			±2.5% 5V		±1.0% All others	

NOTE: The auxiliary output (semi regulated) voltage is specified with main output set for nominal 5.0V @ 10A, all auxiliary outputs at 50% load.

Ordering Information and Options for SRM200 Models.

See general ordering information sheet for terms, etc.

AC Input (standard): 115V factory wired. (Field convertible to 230V.)

AC Input (optional): Factory wired 230V. (Field convertible to 115V.) Add suffix M2.

Cover (optional): Add suffix C. See price sheet or contact sales representative for cost.

Maximum Input Current

Nominal Input Voltage	Amperes
115V ac	3.7
230V ac	1.9

SRM Series
Dimensional Drawings

SRM 200

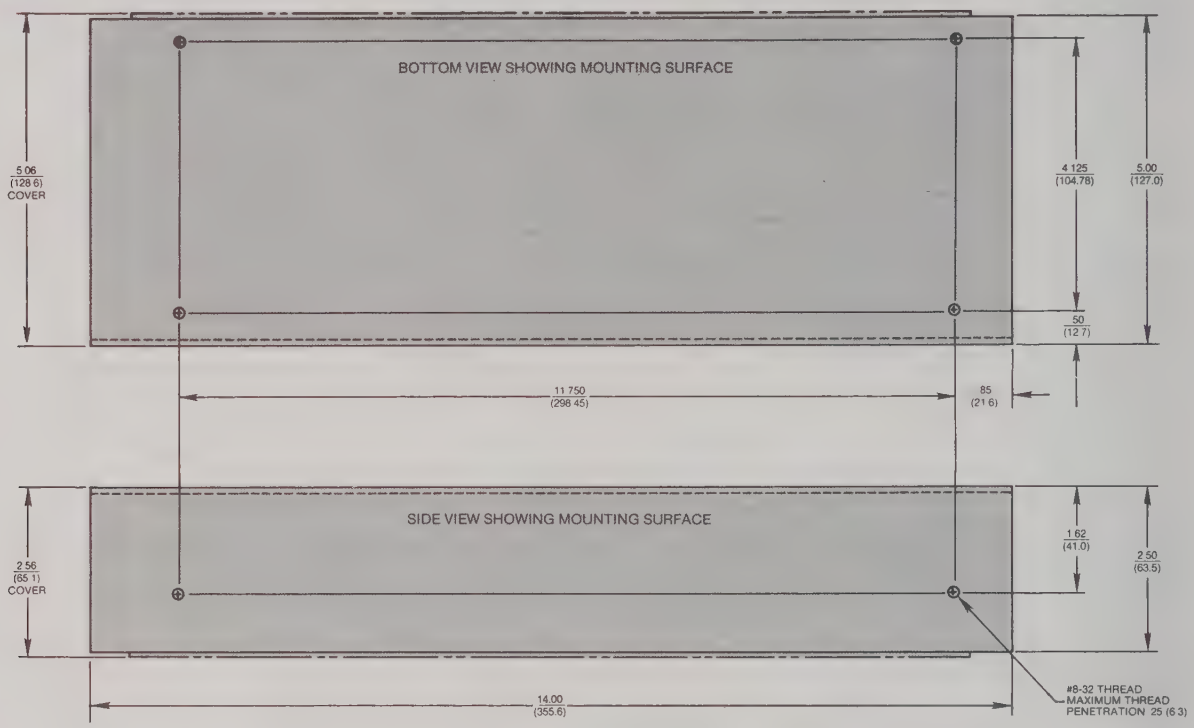

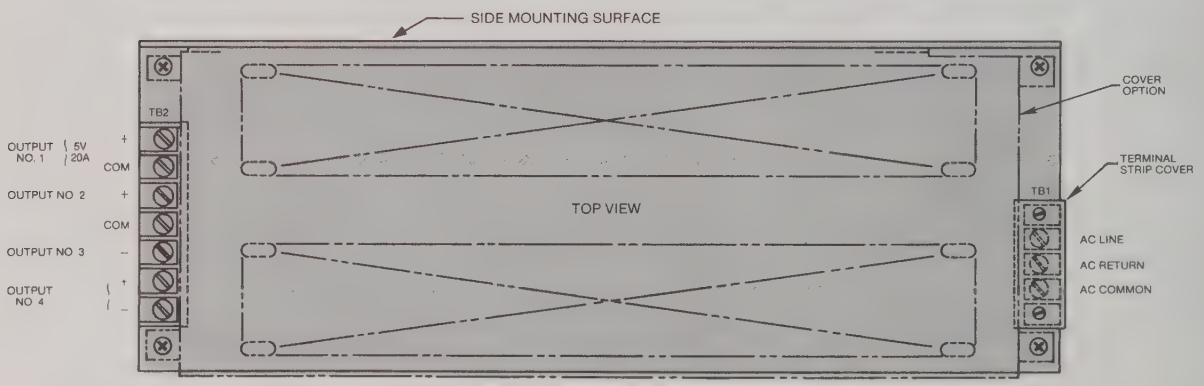

Note: All dimensions are in inches (mm)

Frame	Weight lb.	Kg.
Open	4.25	1.93
Covered	5.00	2.27

SORENSEN RAYTHEON Sorensen Company, 676 Island Pond Road, Manchester, NH 03103 USA (603) 668-4500 TWX 710-220-1339

SORENSEN

Single and Dual Output Linear Power Supplies
PTM Series

- 20 single output models in 5 voltage ranges from 5 to 28V dc with power levels up to 170 watts
- 5 dual output models from 0.8 to 3A
- 115/220/230V ac single phase input standard
- 49 to 440 Hz operation without derating
- High resolution output adjustments
- Adjustable overvoltage protection (OVP) on all models
- Adjustable Current Limiting
- Low ripple and noise
- Remote programming
- Remote sensing
- Dual outputs have one positive and one negative terminal with respect to a common terminal. Both individually adjustable
- U.L. listed
- 5 year warranty

The numerous input/output configurations available in the PTM series will enable you to easily incorporate standard units in your custom rack assemblies.

Specifications

INPUT

Voltage:
105-125V* ac single phase
200-240V ac single phase or
210-250V ac selectable by internal tap changes on power transformer.

Frequency:
49-440 Hz operation without derating.

OUTPUT

Regulation:
Single output.
Line 0.02% + 1mV.
Load 0.03% + 4mV.
Dual output.
Line 0.01% +1mV.
Load 0.01% + 1mV.

Ripple:
1mV rms, 5mV pk-pk maximum.

Temperature Coefficient:
0.01%/°C or 1mV/°C, whichever is greater.

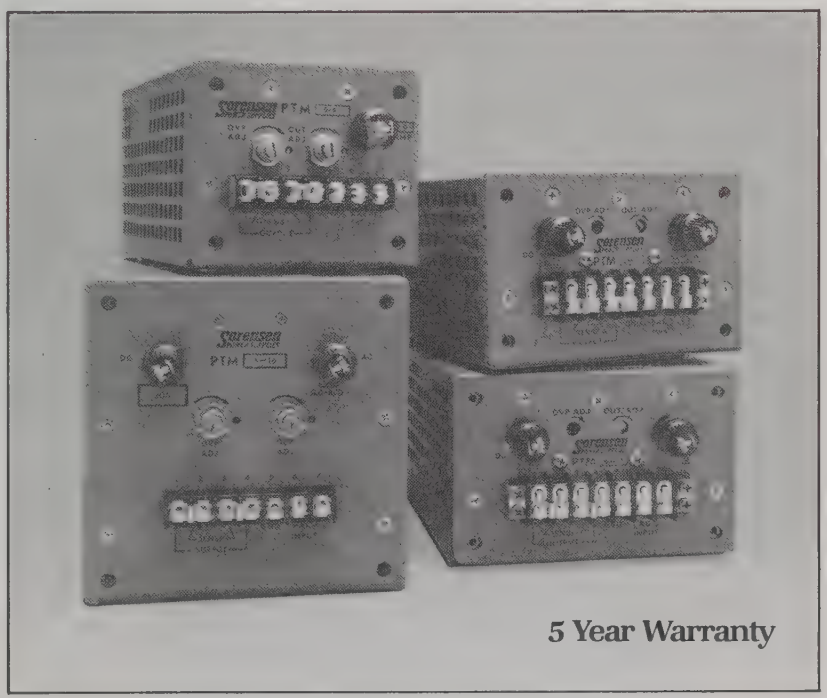

*132V ac at 20% reduced output current rating, reduce linearly from 125V ac.

PTM Series
Model Specifications

Stability:
0.1% for 24 hours after 30 minute warm-up time.

Transient Response Time:
Output voltage returns to within ± 20mV band in less than 50 μs following a step-load change from 10% to 100% of full load.

Overshoot:
No overshoot at turn-on, turn-off or power failure.

Overvoltage Protection:
Automatic, adjustable crowbar action. Factory set to 120% of nominal output voltage.

Current Limiting:
Automatic fold-back type, internally adjustable 50% to 130% of rated current at 40°C. Factory set to 125%.

OPERATING DATA

Remote Sensing:
250mV maximum drop per load lead.

Remote programming:
Resistance programming: 500 ohms/V; voltage programming; volt/volt.

Isolation:
1.3kV dc input to chassis.
300V dc output to chassis.

Ambient Operating Temperature Range:
0 to + 70°C.

Storage Temperature Range:
-40° to +85°C.

Cooling:
Convection cooled.

Finish:
Textured blue thermal paint.

Single Output Models

Model	Nominal Output Voltage V dc	Output Voltage V dc Min.	Output Voltage V dc Max.	Output Current A dc 40°C	50°C	60°C	70°C	Case
PTM 5-4	5	4.8	5.5	4.0	3.6	2.8	1.6	I
PTM 5-7	5	4.8	5.5	7.0	6.3	4.9	2.8	II
PTM 5-11	5	4.8	5.5	11.0	9.6	7.8	4.4	III
PTM 5-16	5	4.8	5.5	16.0	14.0	11.0	6.5	IIIB
PTM 12-2.7	12	11.4	12.6	2.7	2.4	1.9	1.1	I
PTM 12-4.4	12	11.4	12.6	4.4	4.0	3.1	1.8	II
PTM 12-6.5	12	11.4	12.6	6.5	5.7	4.6	2.7	III
PTM 12-10.5	12	11.4	12.6	10.5	9.5	7.0	4.0	IIIB
PTM 15-2.4	15	14.25	15.75	2.4	2.1	1.7	0.95	I
PTM 15-3.5	15	14.25	15.75	3.5	3.1	2.5	1.6	II
PTM 15-5.5	15	14.25	15.75	5.5	4.9	3.9	2.5	III
PTM 15-9.5	15	14.25	15.75	9.5	8.5	6.5	3.6	IIIB
PTM 24-1.6	24	23.0	25.0	1.6	1.4	1.1	0.65	I
PTM 24-2.3	24	23.0	25.0	2.3	2.1	1.7	1.1	II
PTM 24-4	24	23.0	25.0	4.0	3.6	2.9	1.9	III
PTM 24-6.8	24	23.0	25.0	6.8	6.0	4.5	2.7	IIIB
PTM 28-1.4	28	27.0	29.0	1.4	1.2	1.0	0.55	I
PTM 28-2	28	27.0	29.0	2.0	1.8	1.5	1.00	II
PTM 28-3.5	28	27.0	29.0	3.5	3.1	2.6	1.8	III
PTM 28-6.0	28	27.0	29.0	6.0	5.5	4.0	2.4	IIIB

Specifications subject to change without notice.

Dual Output Models

PTM 12/1D	±12	±11	±13	1.0	0.90	0.70	0.40	I
PTM 12/3D	±12	±11	±13	3.0	2.70	2.10	1.20	III
PTM 15/.8D	±15	±14	±16	0.8	0.72	0.56	0.32	I
PTM 15/1.5D	±15	±14	±16	1.5	1.35	1.05	0.60	II
PTM 15/2.8D	±15	±14	±16	2.8	2.52	1.96	1.12	III

Specifications subject to change without notice.

Maximum Input Current

Single Output Models

Nominal Input Voltage	Case I Amperes	Case II Amperes	Case III Amperes	Case IIIB Amperes
115V ac	0.8	1.3	2.4	3.0
220V ac	0.42	0.68	1.3	1.6
230V ac	0.40	0.65	1.2	1.5

Dual Output Models

Nominal Input Voltage	Case I Amperes	Case II Amperes	Case III Amperes
115V ac	0.6	0.9	1.8
220V ac	0.35	0.48	0.96
230V ac	0.3	0.45	0.90

Note: Units shipped are wired for nominal 115V ac.

CASE I

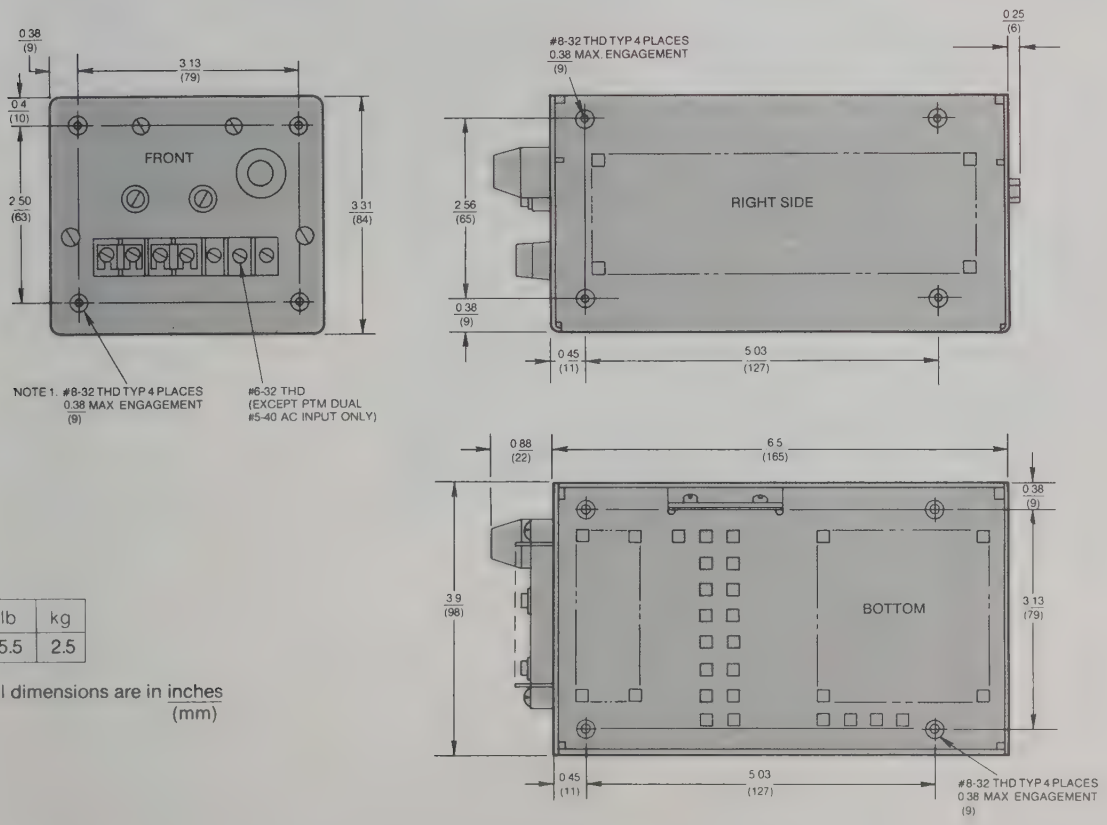

Wt	lb	kg
	5.5	2.5

Note: All dimensions are in inches (mm)

PTM Series
Dimensional Drawings

CASE II, III and IIIB

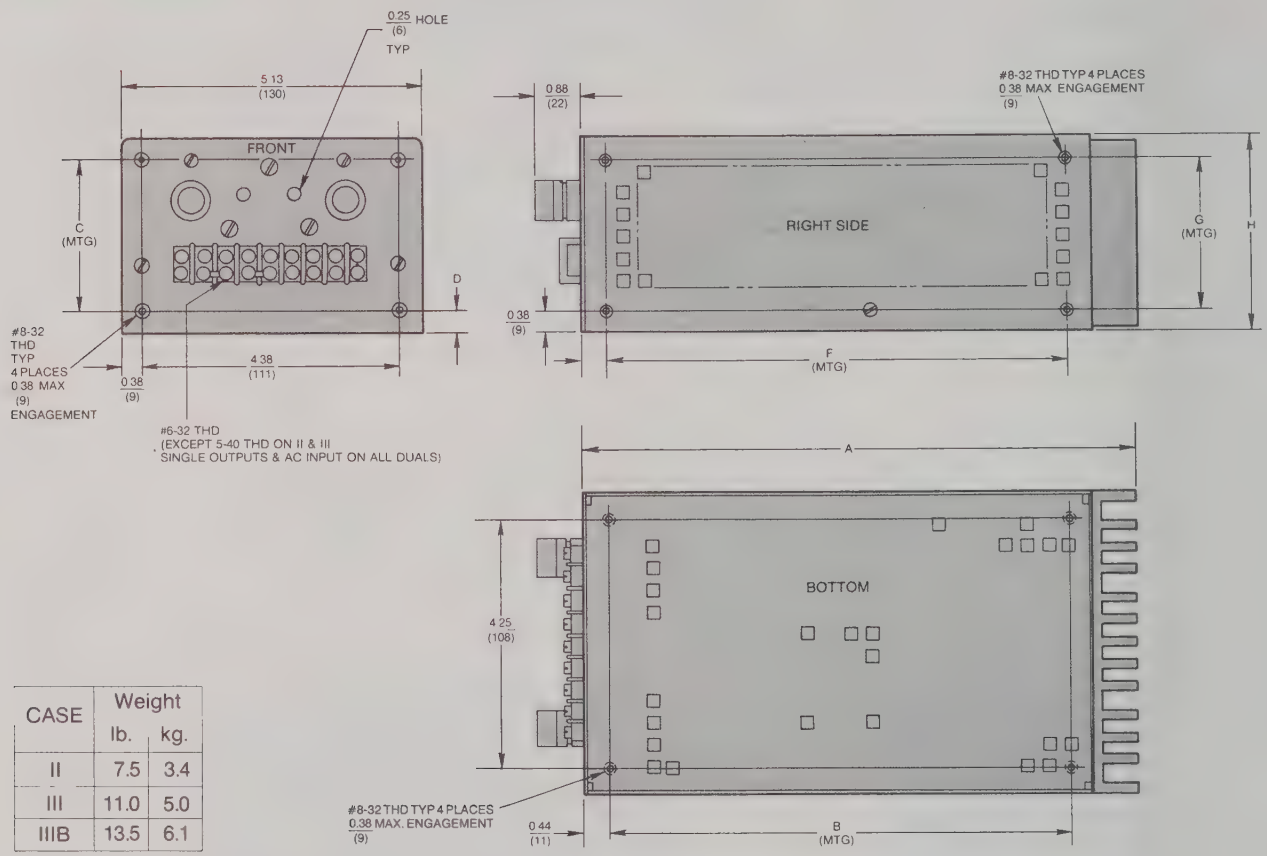

CASE	Weight	
	lb.	kg.
II	7.5	3.4
III	11.0	5.0
IIIB	13.5	6.1

Case	Dimensions							
	A	B	C	D	E	F	G	H
II	6.5 (165)	5.03 (128)	2.5 (63)	0.46 (12)	0.45 (11)	5.03 (128)	2.56 (65)	3.3 (84)
III	9.5 (241)	7.88 (200)	2.5 (63)	0.46 (12)	0.44 (11)	7.88 (200)	2.56 (65)	3.3 (84)
IIIB	9.5 (241)	7.88 (200)	4.38 (111)	0.38 (9)	0.44 (11)	7.88 (200)	4.38 (111)	5.13 (130)

Note: All dimensions are in inches (mm)

SORENSEN RAYTHEON Sorensen Company, 676 Island Pond Road, Manchester, NH 03103 USA (603) 668-4500 TWX 710-220-1339

Wide Range, Adjustable Output Linear Power Supplies

QSA Series

SORENSEN

- 12 models, 0-10V to 200-330V dc with power levels up to 58 watts
- 115/220/230V ac input standard
- 47-440 Hz, operation without derating
- Excellent Regulation
- Low noise and ripple, 300μV rms maximum
- Wide range, adjustable output
- No overshoot on turn-on, turn-off, or power failure
- Remote programming
- Remote sensing
- Master/slave operation
- Convection cooled
- U.L. listed
- 5 year warranty

The high performance capabilities of QSA units have been proven through years of trouble free operation.

With a wide range adjustable output, models are available from 0-10V dc to 200-330V dc.

Remote programming, remote sensing, adjustable current limiting are all standard features.

Standard off-the-shelf models can be easily incorporated in custom power assemblies (rack assemblies) to meet your specific output voltage requirements.

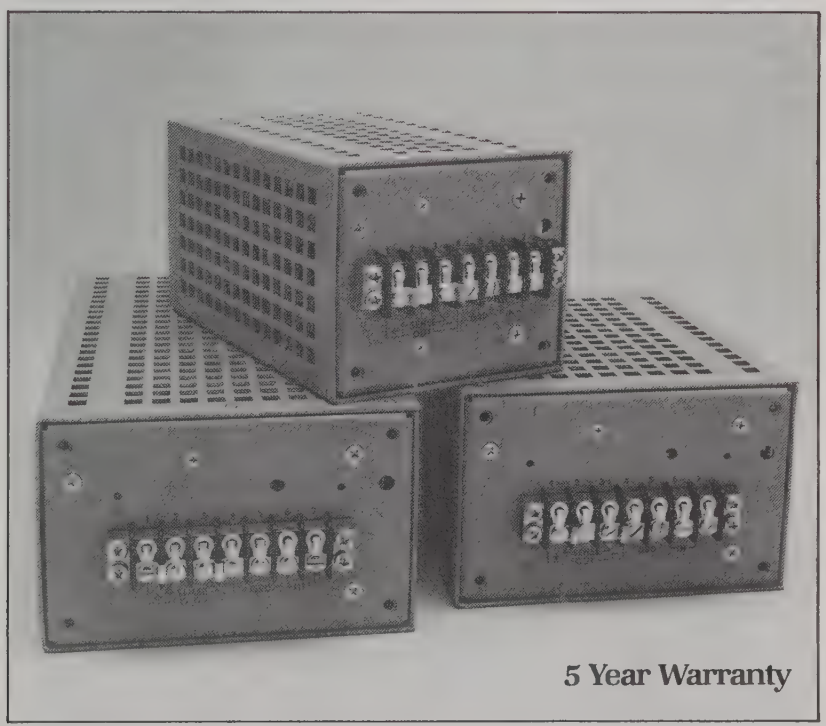

5 Year Warranty

QSA Series
Model Specifications

INPUT

Voltage:
105-125V ac single phase
200-240V ac single phase or
210-250V ac selectable by changing taps on power transformer.

Frequency:
47-440 Hz operation without derating.

OUTPUT

Regulation:
10V models
Line 0.006% + 0.2mV.
Load 0.004% + 0.2mV.
18V-265V models
Line 0.012%
Load 0.008%

Temperature Coefficient:
0.015% or 0.5mV/°C

Ripple:
300μV rms, 3mV pk-pk max.

Stability:
0.025% + 1mV for 8 hours after 30 mins. warm-up time.

Transient Response Time:
Output voltage returns to within ± 20mV band in 20μs (typical) following a step-load change of 0% to 100% of full load.

Overshoot:
No overshoot at turn-on, turn-off or power failure.

Overvoltage Protection:
Available option. See Table below.

Current Limiting:
Automatic current fold-back type, internally adjustable from 65% to 125% of full-rated load current at 40°C. Factory set to 135%.

OPERATING DATA

Remote Sensing:
1.5V maximum drop per load lead.

Remote programming:
Resistance programming:
10V models - 100 ohm/v
18-120V models - 40 ohms/v
175-265V models - 90 ohms/v
Voltage programming, volt/volt.

Series Operation:
Two units in series, except 10V models which may be operated up to 100V dc total output.

Parallel Operation:
Up to four units may be operated in parallel in a master-slave configuration.

Isolation:
Input to chassis: 1.3kV dc.
Output to chassis:
200V dc (10-18V models).
600V dc (48V model).
900V dc (75-120V models).
990V dc (175-265V models).

Ambient Operating Temperature Range:
0 to + 70°C.

Storage Temperature Range:
-40° to +85°C.

Cooling:
Convection cooled.

Finish:
Textured blue thermal paint.

Model	Output Range V dc	Output Current A dc 40°C	50°C	60°C	70°C	Optional Overvoltage (See section 5 for details) Case	OVP
QSA 10-1.4	0-10	1.5	1.4	1.2	0.9	I	VP1
QSA 10-3.7	0-10	4.0	3.7	3.1	2.5	III	VP1
QSA 18-1.1	14-22	1.2	1.1	0.9	0.7	I	VP1
QSA 18-1.9	14-22	2.1	1.9	1.6	1.3	II	VP1
QSA 18-3.0	14-22	3.3	3.0	2.5	2.0	III	VP1
QSA 48-0.4	35-60	0.44	0.4	0.34	0.27	I	VP3
QSA 48-0.8	35-60	0.88	0.8	0.68	0.57	II	VP3
QSA 48-1.2	35-60	1.3	1.2	1.0	0.8	III	VP3
QSA 75-0.5	60-90	0.55	0.5	0.42	0.33	II	VP3
QSA 120-0.5	90-150	0.55	0.5	0.42	0.33	III	VP8
QSA 175-0.25	150-200	0.28	0.25	0.21	0.17	III	VP23
QSA 265-0.15	200-330	0.17	0.15	0.13	0.10	III	VP23

Specifications subject to change without notice.

QSA Series
Maximum Input Current

Model	Case	Input Current, Maximum Amperes, ac		
		115V ac	220V ac	230V ac
QSA 10-1.4	I	.6	.3	.3
QSA 10-3.7	III	1.4	.7	.7
QSA 18-1.1	I	.8	.4	.4
QSA 18-1.9	II	1.3	.65	.65
QSA 18-3.0	III	1.8	.9	.9
QSA 48-0.4	I	.7	.35	.35
QSA 48-0.8	II	1.3	.65	.65
QSA 48-1.2	III	1.8	.9	.9
QSA 75-0.5	II	1.2	.6	.6
QSA 120-0.5	III	1.8	.9	.9
QSA 175-0.25	III	1.2	.6	.6
QSA 265-0.15	III	1.3	.65	.65

Note: Units shipped are wired for nominal 115V ac.

QSA Series
Dimensional Drawings

CASE I, II and III

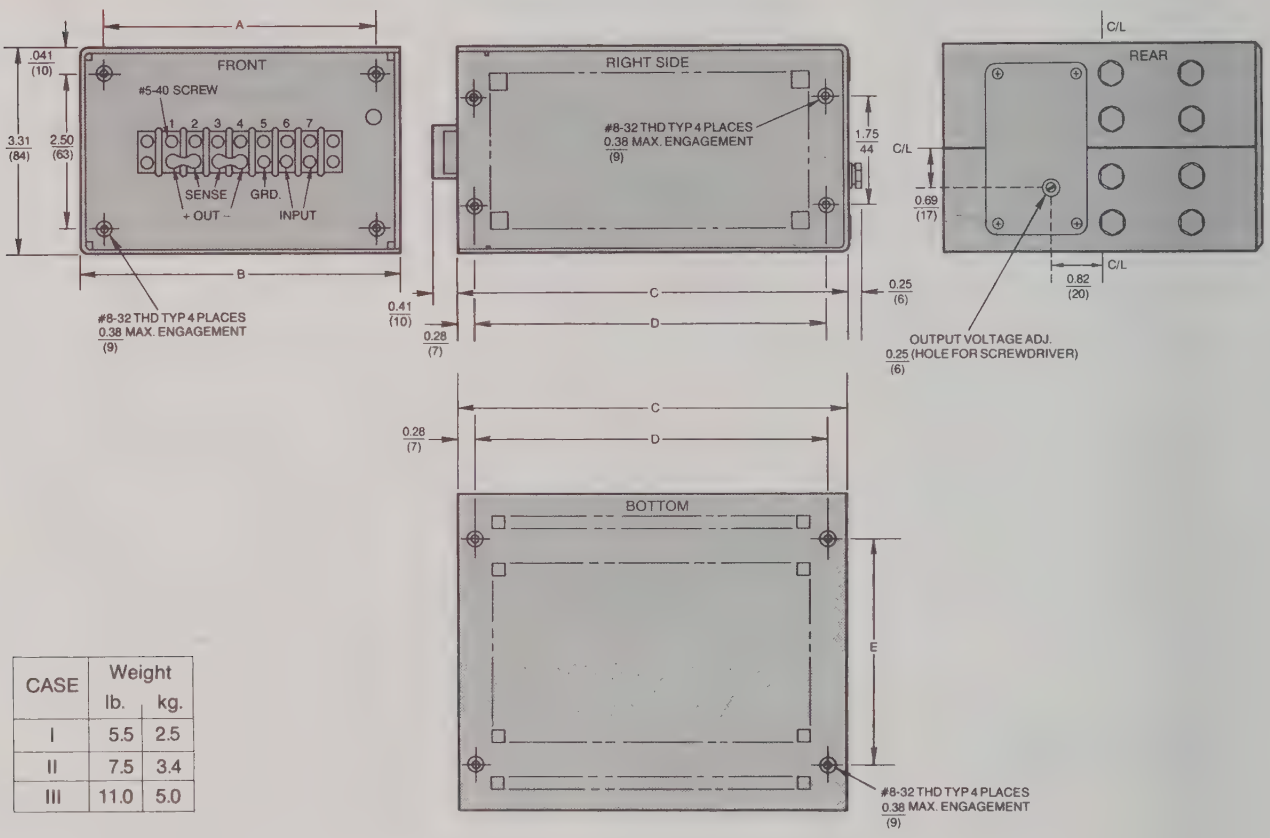

CASE	Weight	
	lb.	kg.
I	5.5	2.5
II	7.5	3.4
III	11.0	5.0

Case	Dimensions				
	A	B	C	D	E
I	3.13 (79)	3.88 (98)	6.31 (160)	5.69 (144)	2.38 (60)
II	4.38 (111)	5.13 (130)	6.31 (160)	5.69 (144)	3.63 (92)
III	4.38 (111)	5.13 (130)	9.31 (236)	8.69 (220)	3.63 (92)

Note: All dimensions are in inches (mm)

SORENSEN
RAYTHEON
Sorensen Company, 676 Island Pond Road, Manchester, NH 03103 USA (603) 668-4500 TWX 710-220-1339

SORENSEN

Miniature Encapsulated (printed circuit board mounting) Linear Power Supplies MM Series

- 17 models - single, dual and triple output
- 9 single output models from 5V to 28V dc output from 40mA to 2A
- 7 dual output models ±12V and ±15V dc outputs from 25mA to 300mA
- A unique triple output model with a +5V dc output at 500mA and ±15V dc outputs at 100mA
- 115V ac input standard, other voltages available as options
- Automatic Current Limiting provides short circuit or overload protection on all models
- Manufactured in USA from quality components
- U.L. listed
- 2 year warranty

The MM series of power supplies, in single, dual and triple output configurations, are ideal for powering OP amps, linear IC and discrete analog or MOS circuits.

MM Series

MM Series
Model Specifications

INPUT

Voltage:
105-125V ac standard
200-240V ac add M1 to model designation.
210-250V ac add M2 to model designation.
Consult local sales representative for M1 and M2 pricing.

Frequency:
50-400 Hz

OUTPUT

Current and Voltage:
Setpoint accuracy is ±2.0%.

PRECISION OUTPUT ADJUSTMENT

Available only on MMS Case IV models.

For those applications requiring a more precise adjustment for set-point accuracy, Sorensen has developed an external trim adjustment.

To utilize the trim adjustment, simply connect a 20K ohm resistor or larger) between the TRIM and + (positive) terminals for increased voltage or between the TRIM and – (negative) terminals for lower output voltage.

Attempts to adjust the output voltage to other than the specified voltage may degrade unit performance and are not recommended.

Regulation and Ripple:
See Model Specifications.

OPERATING DATA

Temperature Coefficient:
0.02%/°C.

Overvoltage Protection:
Standard feature on all 5V dc models.
Factory set at 6.25V nominal. Prolonged operation in overvoltage mode not recommended. Interruption of ac input will reset overvoltage protection circuit.

Short Circuit Protection:
Built-in, automatic short circuit or overload protection circuit standard on all models. Prolonged operation in this mode is not recommended.

Input Isolation:
50 megohms, minimum.

Ambient Operating Temperature Range:
–25 to + 70°C.

Storage Temperature Range:
–25° to +85°C.

Finish:
Black plastic case.

Model	Output Type	Output Voltage V dc	Output Current mA 50°C	60°C	70°C	Ripple & Noise mVrms	Regulation Line ±10Vac %	Load NL-FL %	Case
MMS 5-.250	Single	5	250	250	250	1.0	0.04	0.1	I
MMS 5-.500	Single	5	500	345	125	1.0	0.04	0.1	I
MMS 5-1.0	Single	5	1000	580	150	1.0	0.04	0.1	II
MMS 5-2.0	Single	5	2000	1650	750	1.0	0.04	0.1	III
MMS 10-.120	Single	10	120	90	30	0.5	0.04	0.04	IV
MMS 12-.100	Single	12	100	75	25	0.5	0.04	0.04	IV
MMS 15-.100	Single	15	100	75	25	0.5	0.04	0.04	IV
MMS 24-.050	Single	24	50	38	13	1.0	0.04	0.04	IV
MMS 28-.040	Single	28	40	30	10	1.0	0.04	0.04	IV
MMD 12-.120	Dual	±12	120	120	42	0.5	0.04	0.04	I
MMD 12-.240	Dual	±12	240	180	60	0.5	0.04	0.04	II
MMD 15-.025	Dual	±15	25	25	25	2.0	0.4	0.4	I
MMD 15-.065	Dual	±15	65	65	65	0.5	0.04	0.04	I
MMD 15-.100	Dual	±15	100	100	35	0.5	0.04	0.04	I
MMD 15-.200	Dual	±15	200	100	50	0.5	0.04	0.04	II
MMD 15-.350	Dual	±15	350	310	70	0.5	0.04	0.04	III
MMT 5/15E	Triple	±15	100	100	35	0.5	0.04	0.04	II
		5*	500	375	125	0.5	0.04	0.1	

Specifications subject to change without notice.
* 5V output has 100K, ohm isolation to ±15V.

SORENSEN RAYTHEON Sorensen Company, 676 Island Pond Road, Manchester, NH 03103 USA (603) 668-4500 TWX 710-220-1339

CASE I, II, III and V

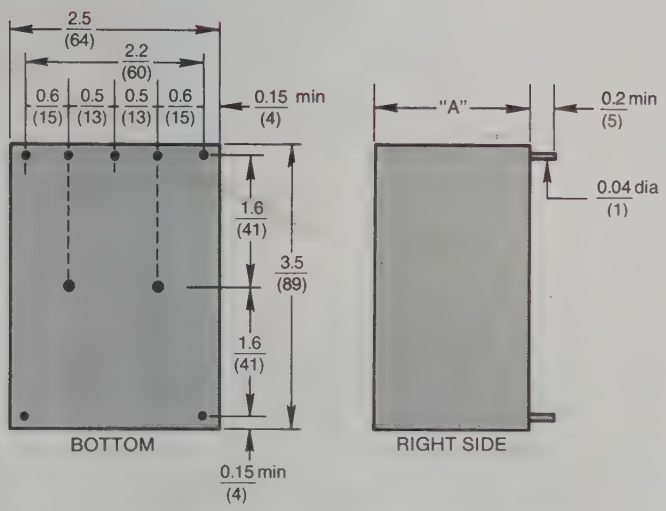

CASE IV

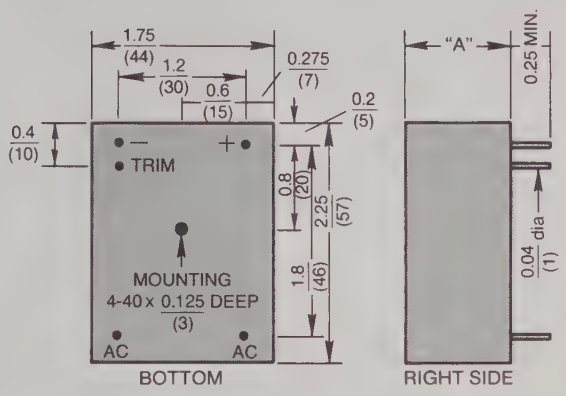

Case:	I		II		III		IV	
Dimension "A":	0.875 (22)		1.25 (32)		1.62 (40)		1.0 (25)	
Weight:	lb.	kg.	lb.	kg.	lb.	kg.	lb.	kg.
	.75	0.34	.90	0.41	1.4	0.64	.40	0.18

PIN CONFIGURATION (BOTTOM VIEW)

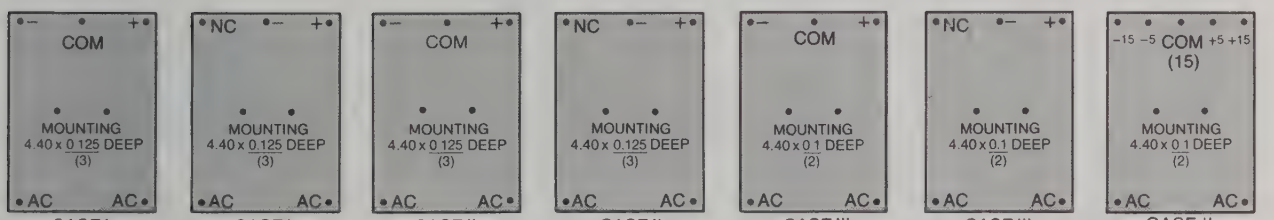

CASE I (DUAL OUTPUT) | CASE I (5 VOLT) | CASE II (DUAL OUTPUT) | CASE II (5 VOLT) | CASE III (DUAL OUTPUT) | CASE III (5 VOLT) | CASE II (TRIPLE OUTPUT)

Note: All dimensions are in inches (mm)

MM Series
Dimensional Drawings

MOUNTING SOCKETS:
Consult local sales representative for pricing.

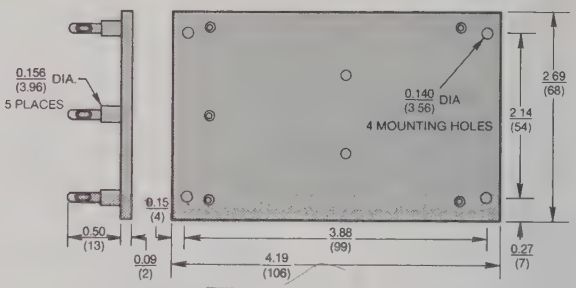

MS-1 — DESIGNED FOR CASE I, II, AND III

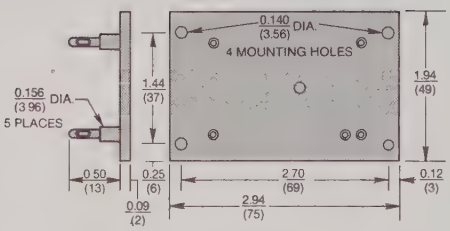

MS-3 — DESIGNED FOR CASE IV

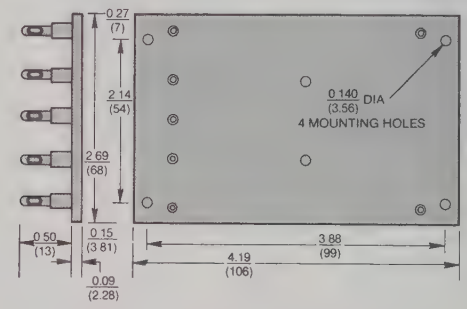

MS-5 — DESIGNED FOR CASE II (TRIPLE OUTPUT)

SORENSEN RAYTHEON Sorensen Company, 676 Island Pond Road, Manchester, NH 03103 USA (603) 668-4500 TWX 710-220-1339

SORENSEN

Miniature Encapsulated Linear Power Supplies (chassis mounting) CM Series

- 5 models. Three 5V dc single output models and two ±15V dc dual output models
- Barrier terminal strip connections for easy installation or removal
- Overvoltage protection standard on single output models
- 115V ac input standard, other voltages available as options
- Automatic Current Limiting provides short circuit or overload protection on all models
- Manufactured in USA from quality components
- U.L. listed
- 2 year warranty

The convenience of terminal strip connections and threaded insert mounting make the CM series ideal for prototype design or low volume production applications.

Specifications

INPUT

Voltage:
105-125V ac standard
200-240V ac add M1 to model designation.
210-250V ac add M2 to model designation.
Consult local sales representative for M1 and M2 pricing.

Frequency:
50-400 Hz

OUTPUT

Current and Voltage:
Setpoint accuracy is ±2.0%.

Regulation and Ripple:
See Model Specifications on next page.

OPERATING DATA

Temperature Coefficient:
0.02%/°C.

Overvoltage Protection:
Standard feature on all 5V dc models.
Factory set at 6.25V nominal.
Prolonged operation in overvoltage mode not recommended.
Interruption of ac input will reset overvoltage protection circuit.

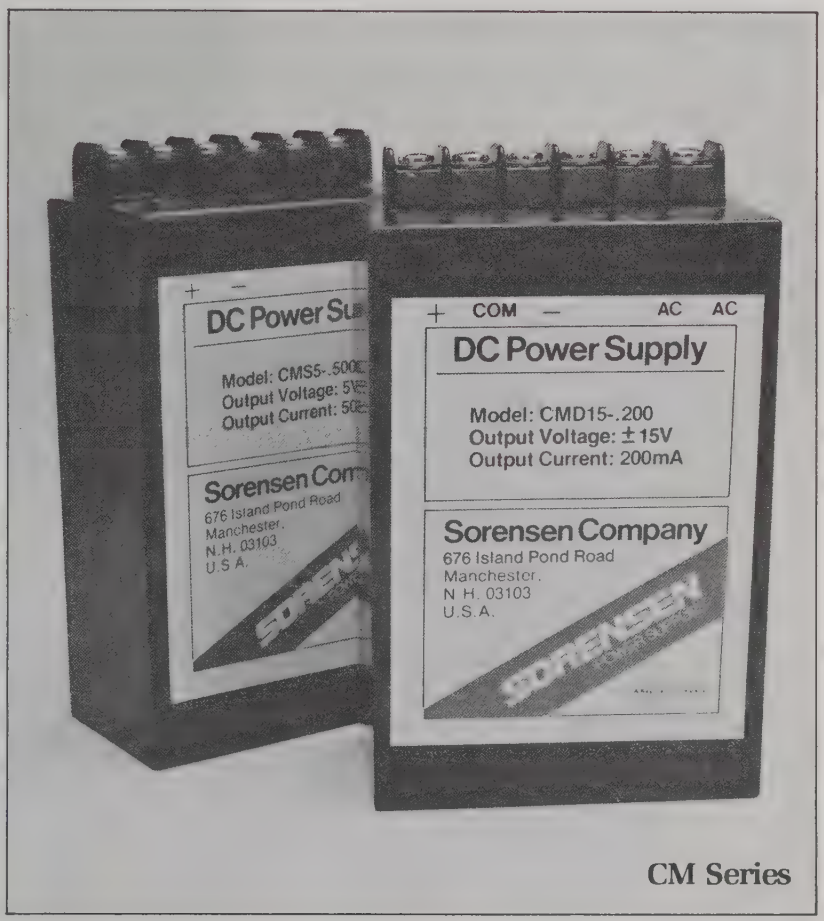

CM Series

CM Series
Dimensional Drawings

Short Circuit Protection:
Built-in, automatic short circuit or overload protection circuit standard on all models. Prolonged operation in this mode is not recommended.

Input Isolation:
50 megohms, minimum.

Ambient Operating Temperature Range:
-25 to + 70°C.

Storage Temperature Range:
-25° to +85°C.

Finish:
Black plastic case.

Model	Output Type	Output Voltage V dc	Output Current mA 50°C	60°C	70°C	Ripple & Noise mVrms	Regulation Line ±10Vac %	Load NL-FL %	Case
CMS 5-.500	Single	5	500	500	175	2.0	0.1	0.2	I
CMS 5-1.00	Single	5	1000	600	150	2.0	0.1	0.3	I
CMS 5-2.00	Single	5	2000	1650	750	2.0	0.1	0.3	II
CMD 15-.100	Dual	±15	100	100	50	1.0	0.1	0.1	I
CMD 15-.200	Dual	±15	200	150	50	1.0	0.1	0.1	I

Specifications subject to change without notice.

CASE I and II

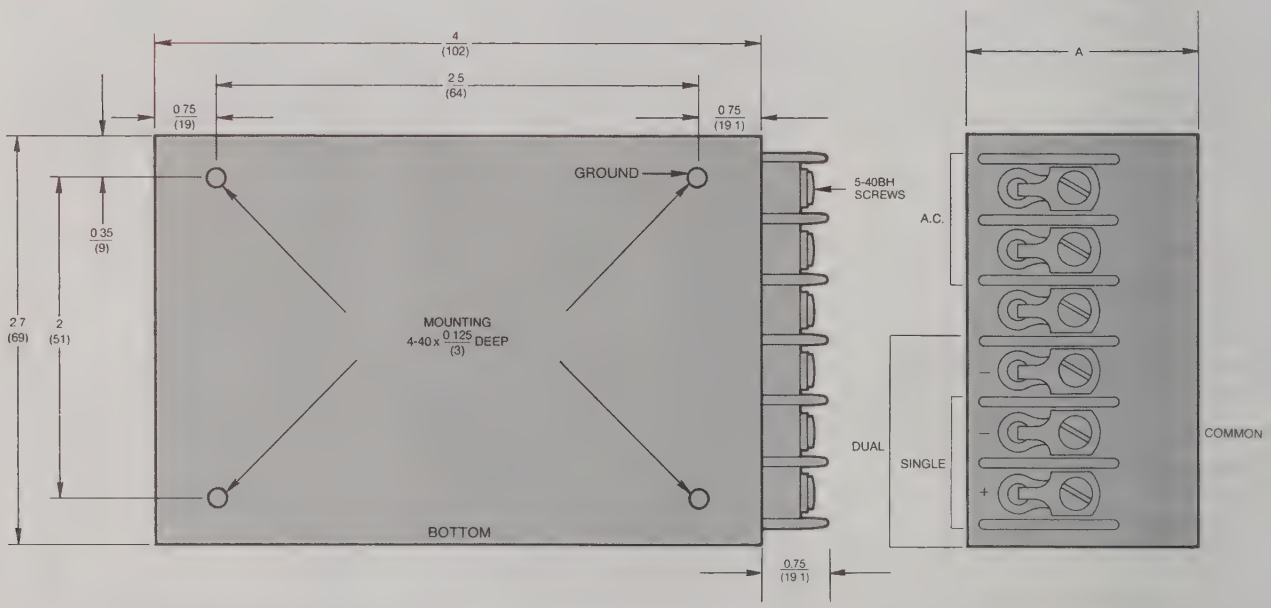

Case:	I		II	
Dimension "A":	1.45 (37)		2.0 (51)	
Weight:	lb.	kg.	lb.	kg.
	1.25	0.57	1.80	0.82

Note: All dimensions are in inches (mm)

SORENSEN RAYTHEON Sorensen Company, 676 Island Pond Road, Manchester, NH 03103 USA (603) 668-4500 TWX 710-220-1339

- Built to your specific requirements from standard Sorensen Power Supplies with proven reliability and performance

If you need a low cost multi-output power supply without the expense of custom engineering or manufacturing, take a close look at Sorensen power assemblies.

98* different power supplies are available, offering a choice of linear and switching models with fixed or adjustable outputs.

Every power assembly is shipped completely wired and tested ready for installation. AC input and output terminals are provided to match the power requirements at each output. Programming and sense terminals are also all pre-wired to terminal boards at the back of the rack.

- Sorensen Power Assemblies; custom multiple output power supplies
- 5 year warranty

It's very simple to specify a Sorensen power assembly. Just call your local sales office or the main plant and tell them the parameters of each output you require. At no cost to you, we will configure an assembly to your requirements and give you a firm quotation and delivery date (delivery usually 4-6 weeks).

If your requirements cannot be met by a Sorensen standard power assembly, our design engineers will offer you an alternative special power assembly with advice on how we can build it at the lowest possible cost.

*See QRL and 488 DAP series for special power assembly stock rack configurations available for programmable power supplies.

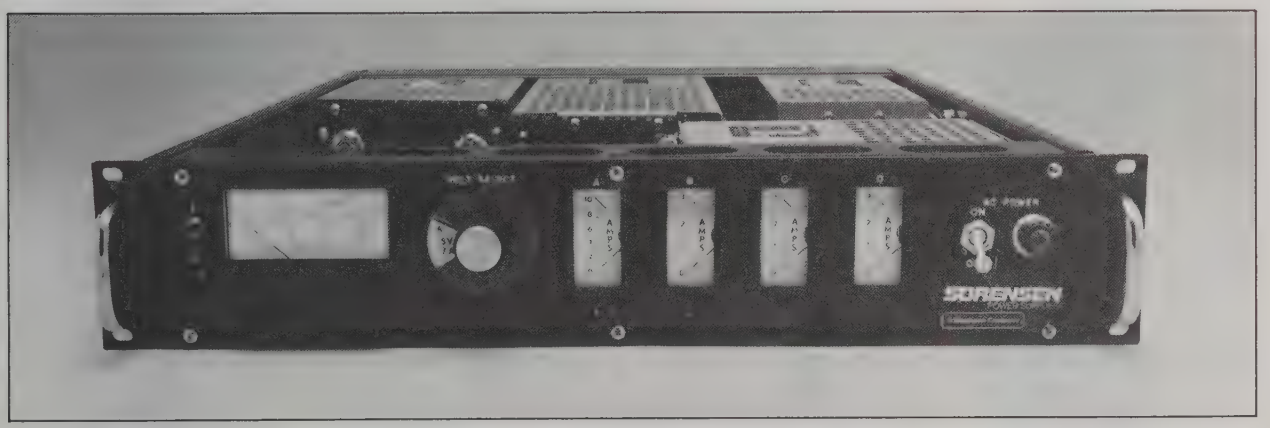

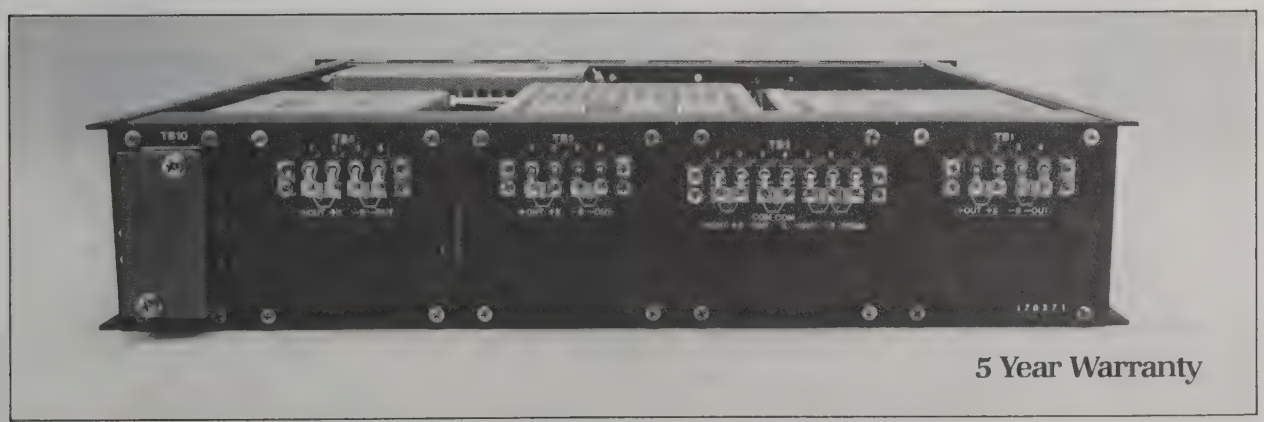

5 Year Warranty

Power Assemblies

5 Power Supply Series
(See Pages 4.7-4.11)

SSD Series-15 Models High Power Switching Power Supplies. 5V-48V dc. Models up to 528 watts output.

STM Series-18 Models High efficiency Switching Power Supplies. 5V-48V dc. Models up to 672 watts output.



SLC-B Series-27 Models Single output. 5V-28V dc. Models up to 300 watts.



PTM Series-25 Models Single and Dual Output Linear Power Supplies. 5V-28V dc. Models up to 170 watts output.



QSA Series-12 Models Wide Range Adjustable Linear Power Supplies. 0-10V dc to 200-300V dc. Models up to 58 watts output.

3 Standard Rack Sizes
3.5″ or 5.25″ panel heights

System 319 Up to 5 supplies. Up to 330V. Up to 45A. 3.5″ x 19″ x 19.4″ (See Page 4.7)

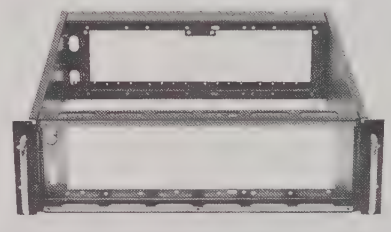

System 519 Up to 5 supplies. Up to 330V. Up to 120A. 5.25″ x 19″ x 19.4″ (See Pages 4.8 and 4.9)

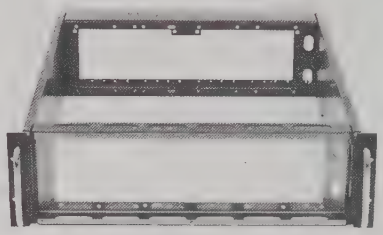

System 522 Up to 5 supplies. Up to 330V. Up to 120A. 5.25″ x 19″ x 22.4″ (See Pages 4.10 and 4.11)

Typical terminal board configuration

Note: Terminal boards are not availble for outputs over 100A. These must be connected direct to supply bus-bars.

5 Panel Configurations



Panel A Blank panel.

Panel B Circuit breaker and pilot light.

Panel C Circuit breaker, pilot light and output voltage adjustment and light.

Panel D Metered panel with test points, voltage meter selection switch, current meters, breaker and light. Ammeters up to 100A.



Panel E Metered panel, test point, voltage meter, selection switch, current meters, output adjustments breaker and pilot light. Ammeters up to 100A.

Models SSD, STM, SLC-B and PTM Specifications

Single Output Power Supplies

Model	Current @40°C A dc	Input Voltage V ac	Input Voltage V dc	Regulation Line mV	Regulation Load mV	Ripple mVrms (typ)	Ripple mVpk-pk (typ)	Weight lb/kg	Case
5 Volt									
PTM 5-4	4	115/220/230	—	0.02% + 1	0.03% + 4	1	5	5.5/2.5	I
SLC 5-6B	6	115/230	—	0.2%	0.2%	—	50	1.5/0.7	IA
PTM 5-7	7	115/220/230	—	0.02% + 1	0.03% + 4	1	5	7.5/3.4	II
PTM 5-11	11	115/220/230	—	0.02% + 1	0.03% + 4	1	5	11.0/5.0	III
SLC 5-11B	11	115/230	—	0.2%	0.2%	—	50	3.0/1.4	IB
PTM 5-16	16	115/220/230	—	0.02% + 1	0.03% + 4	1	5	13.5/6.1	IIIB
SLC 5-20B	20	115/230	—	0.2%	0.2%	—	50	3.0/1.4	2A
STM 5-24	24	115	127-173	0.025% + 1	0.025% + 4	5	30	9.0/4.1	III
SLC 5-30B	30	115/230	—	0.2%	0.2%	—	50	4.2/1.9	2B
SSD 5-30	36	115/220	255/345	0.02% + 1	0.01% + 1	5	20	5.5/2.5	III
STM 5-36	36	115	127-173	0.025% + 1	0.025% + 1	5	30	9.0/4.1	IIIA
SLC 5-40B	40	115/230	—	0.2%	0.2%	—	50	4.2/1.9	3
SSD 5-45	45	115/220	255-345	0.01% + 1	0.01% + 1	5	20	5.5/2.5	IIIA
SLC 5-60B	40	115/230	—	0.1%	0.3%	—	50	7.9/3.6	4
STM 5-60	60	115	127-173	0.025% + 1	0.025% + 1	5	30	17.25/7.8	IVA
SSD 5-75	75	115/220	255-345	0.01% + 1	0.01% + 1	12	60	14/6.4	IVB
STM 5-100	100	115	127-173	0.025% + 1	0.025% + 1	5	30	23.75/10.7	VI
12 Volt									
SLC 12-2.5B	2.5	115/230	—	0.2%	0.2%	—	100	1.5/0.7	IA
PTM 12-2.7	2.7	115/220/230	—	0.02% + 1	0.03% + 4	1	5	5.5/2.5	I
PTM 12-4.4	4.4	115/220/230	—	0.02% + 1	0.03% + 4	1	5	7.5/3.4	II
SLC 12-4.5B	4.5	115/230	—	0.2%	0.2%	—	100	3.0/1.4	IB
PTM 12-6.5	6.5	115/220/230	—	0.02% + 1	0.03% + 4	1	5	11.0/5.0	III
SLC 12-8B	8	115/230	—	0.2%	0.2%	—	100	3.0/1.4	2A
PTM 12-10.5	10.5	115/220/230	—	0.02% + 1	0.03% + 4	1	5	13.5/6.1	IIIB
SLC 12-12B	12	115/230	—	0.2%	0.2%	—	100	4.2/1.9	2B
STM 12-12	12	115	127-173	0.025% + 1	0.025% + 1	5	30	6.5/2.9	III
SSD 12-15	15	115/220	255-345	0.01% + 1	0.01% + 1	5	20	5.5/2.5	III
SLC 12-16.7B	16.7	115/230	—	0.2%	0.2%	—	100	4.2/1.9	3
STM 12-20	20	115	127-173	0.025% + 1	0.025% + 1	5	30	9.0/4.1	IIIA
SSD 12-22	22	115/220	255-345	0.01% + 1	0.01% + 1	5	20	7.5/3.4	IIIA
SLC 12-25B	25	115/230	—	0.1%	0.3%	—	100	7.9/3.6	4
STM 12-30	30	115	127-173	0.025% + 1	0.025% + 1	5	30	17.25/7.8	IVA
STM 12-50	50	115	127-173	0.025% + 1	0.025% + 1	5	30	23.75/10.7	VI
15 Volt									
SLC 15-2B	2	115/230	—	0.2%	0.2%	—	100	1.5/0.7	IA
PTM 15-2.4	2.4	115/220/230	—	0.02% + 1	0.03% + 4	1	5	5.5/2.5	I
PTM 15-3.5	3.5	115/220/230	—	0.02% + 1	0.03% + 4	1	5	7.5/3.4	II
SLC 15-3.6B	3.6	115/230	—	0.2%	0.2%	—	100	3.0/1.4	IB
PTM 15-5.5	5.5	115/220/230	—	0.02% + 1	0.03% + 4	1	5	11.0/5.0	III
PTM 15-9.5	9.5	115/220/230	—	0.02% + 1	0.03% + 4	1	5	13.5/6.1	IIIB
SLC 15-10B	10	115/230	—	0.2%	0.2%	—	100	4.2/1.9	2B
SSD 15-12	12	115/220	255/345	0.01% + 1	0.01% + 1	5	20	5.5/2.5	III
SLC 15-13.3B	13.3	115/230	—	0.2%	0.2%	—	100	4.2/1.9	3
STM 15-24	24	115	127-173	0.025% + 1	0.025% + 1	5	30	17.25/7.8	IVA
STM 15-32	32	115	127-173	0.025% + 1	0.025% + 1	5	30	23.75/10.7	VI

Specifications subject to change without notice.

Single Output Series
Models SSD, STM, SLC-B and PTM Specifications

Single Output Power Supplies (Cont'd.)

Model	Current @40°C A dc	Input Voltage V ac	Input Voltage V dc	Regulation Line mV	Regulation Load mV	Ripple mVrms (typ)	Ripple mVpk-pk (typ)	Weight lb/kg	Case
20 Volt									
SLC 20-1.5B	1.5	115/230	—	0.2%	0.2%	—	100	1.5/0.7	IA
SLC 20-2.75B	2.75	115/230	—	0.2%	0.2%	—	100	3.0/1.4	IB
SLC 20-5B	5	115/230	—	0.2%	0.2%	—	100	3.0/1.4	2A
SLC 20-7.5B	7.5	115/230	—	0.2%	0.2%	—	100	4.2/1.9	2B
24 Volt									
SLC-24-1.2B	1.2	115/230	—	0.2%	0.2%	—	100	1.5/0.7	IA
PTM 24-1.6	1.6	115/220/230	—	0.02% + 1	0.03% + 4	1	5	5.5/2.5	I
SLC 24-2.2B	2.2	115/230	—	0.2%	0.2%	—	100	3.0/1.4	1B
PTM 24-2.3	2.3	115/220/230	—	0.02% + 1	0.03% + 4	1	5	7.5/3.4	II
SLC 24-4B	4	115/230	—	0.2%	0.2%	—	100	3.0/1.4	2A
PTM 24-4	4	115/220/230	—	0.02% + 1	0.03% + 4	1	5	11.0/5.0	III
SLC 24-6B	6	115/230	—	0.2%	0.2%	—	100	4.2/1.9	2B
PTM 24-6.8	6.8	115/220/230	—	0.02% + 1	0.03% + 4	1	5	13.5/6.1	IIIB
SLC 24-8.3B	8.3	115/230	—	0.2%	0.2%	—	100	4.2/1.9	3
STM 24-8.5	8.5	115	127/173	0.025% + 1	0.025% + 1	5	30	6.5/2.9	III
SSD 24-8.5	8.5	115/220	255/345	0.01% + 1	0.01% + 1	5	20	5.5/2.5	III
SLC 24-12.5B	12.5	115/230	—	0.1%	0.3%	—	100	7.9/3.6	4
SSD 24-13	13	115/220	255/345	0.01% + 1	0.01% + 1	5	20	7.5/3.4	IIIA
STM 24-21	21	115	127/173	0.025% + 1	0.025% + 1	5	30	17.25/7.8	IVA
SSD 24-22	22	115/220	255/345	0.01% + 1	0.01% + 1	12	60	14.0/6.4	IVB
STM 24-28	28	115	127/173	0.025% + 1	0.025% + 1	5	30	23.75/10.7	VI
28 Volt									
PTM 28-1.4	1.4	115/220/230	—	0.02% + 1	0.03% + 4	1	5	5.5/2.5	I
PTM 28-2	2	115/220/230	—	0.02% + 1	0.03% + 4	1	5	7.5/3.4	II
PTM 28-3.5	3.5	115/220/230	—	0.02% + 1	0.03% + 4	1	5	11.0/5.0	III
PTM 28-6	6	115/220/230	—	0.02% + 1	0.03% + 4	1	5	13.5/6.1	IIIB
STM 28-7	7	115	127/173	0.025% + 1	0.025% + 1	5	30	6.5/2.9	III
SSD 28-7	7	115/220	255/345	0.01% + 1	0.01% + 1	5	20	5.5/2.5	III
SLC 28-10B	10	115/230	—	0.1%	0.3%	—	100	7.9/3.6	4
STM 28-11	11	115	127/173	0.025% + 1	0.025% + 1	5	30	9.0/4.1	IIIA
SSD 28-11	11	115/220	255/345	0.01% + 1	0.01% + 1	5	20	7.5/3.4	IIIA
STM 28-24	24	115	127/173	0.025% + 1	0.025% + 1	5	30	23.75/10.7	VI
36 Volt									
SSD 36-5	5	115/220	255-345	0.01% + 1	0.01% + 1	5	20	5.5/2.5	III
SSD 36-8	8	115/220	255/345	0.01% + 1	0.01% + 1	5	20	7.5/3.4	IIIA
48 Volt									
SSD 48-4	4	115/220	255/345	0.01% + 1	0.01% + 1	5	20	5.5/2.5	III
STM 48-10	10	115	127/173	0.025% + 1	0.015% + 1	5	30	17.25/7.8	IVA
STM 48-14	14	115	127/173	0.025% + 1	0.025% + 1	5	30	23.75/10.7	VI

Specifications subject to change without notice.

Dual and Wide Range Adjustable Output
Models PTM and QSA Specifications

Dual Output Power Supplies

Model	Current @40°C A dc	Input Voltage V ac	Regulation Line mV	Regulation Load mV	Ripple mVrms (typ)	Ripple mVpk-pk (typ)	Weight lb/kg	Case
±12 Volt								
PTM 12/1D	1	115/220/330	0.01% + 1	0.01% + 1	1	5	5.5/2.5	I
PTM 12/3D	3	115/220/230	0.01% + 1	0.01% + 1	1	5	13.5/6.1	III
±15 Volt								
PTM 15/.8D	0.8	115/220/330	0.01% + 1	0.01% + 1	1	5	5.5/2.5	I
PTM 15/1.5D	1.5	115/220/230	0.01% + 1	0.01% + 1	1	5	7.5/3.4	II
PTM 15/2.8D	2.8	115/220/230	0.01% + 1	0.01% + 1	1	5	13.5/6.1	III

Wide Range Adjustable Output Power Supplies

Model	Current @40°C A dc	Input Voltage V ac	Regulation Line mV	Regulation Load mV	Ripple mVrms (typ)	Ripple mVpk-pk (typ)	Weight lb/kg	Case
0-10 Volt								
QSA 10-1.4	1.5	115/220/230	.004% + 0.2	.008% + 0.2	0.3 (max)	3 (max)	5.5/2.5	I
QSA 10-3.7	4.0	115/220/230	.004% + 0.2	.008% + 0.2	0.3 (max)	3 (max)	13.5/6.1	III
14-22 Volt								
QSA 18-1.1	1.2	115/220/230	.008%	.012%	0.3 (max)	3 (max)	5.5/2.5	I
QSA 18-1.9	2.1	115/220/230	.008%	.012%	0.3 (max)	3 (max)	7.5/3.4	II
QSA 18-3.0	3.3	115/220/230	.008%	.012%	0.3 (max)	3 (max)	13.5/6.1	III
35-60 Volt								
QSA 48-0.4	0.44	115/220/230	.008%	.012%	0.3 (max)	3 (max)	5.5/2.5	I
QSA 48-0.8	0.88	115/220/230	.008%	.012%	0.3 (max)	3 (max)	7.5/3.4	II
QSA 48-1.2	1.3	115/220/230	.008%	.012%	0.3 (max)	3 (max)	13.5/6.1	III
60-90 Volt								
QSA 75-0.5	0.55	115/220/230	.008%	.012%	0.3 (max)	3 (max)	7.5/3.4	II
90-150 Volt								
QSA 120-0.5	0.55	115/220/230	.008%	.012%	0.3 (max)	3 (max)	13.5/6.1	III
150-200 Volt								
QSA 175-0.25	0.28	115/220/230	.008%	.012%	0.3 (max)	3 (max)	13.5/6.1	III
200-330 Volt								
QSA 265-0.15	0.17	115/220/230	.008%	.012%	0.3 (max)	3 (max)	13.5/6.1	III

Specifications subject to change without notice.

Standard Rack Size

Choose from 3 Standard Rack Sizes

See back of catalog for Request for Quotation forms.

Chassis 319 For power supplies with case size I, IA, II, III, IB, 2A, IIIA power supplies with output up to 45A or 336 watts.

Panel size: 3.5 x 19.0 in. (89 x 483 mm)

Chassis 519 For power supplies with case size I, IA, II, III, IB, IIIB, 2A, 2B, IIIA, 3, 4, IVA, IVB or VI, i.e. power supplies with output up to 120A or 768 watts.

Panel size: 5.25 x 19.0 in. (133 x 483 mm)

Chassis 522 For all models in SSD, SLC-B, STM, PTM and QSA series, i.e. single output up to 120A or 768 watts.

Panel size: 5.25 x 19.0 in. (133 x 483 mm)

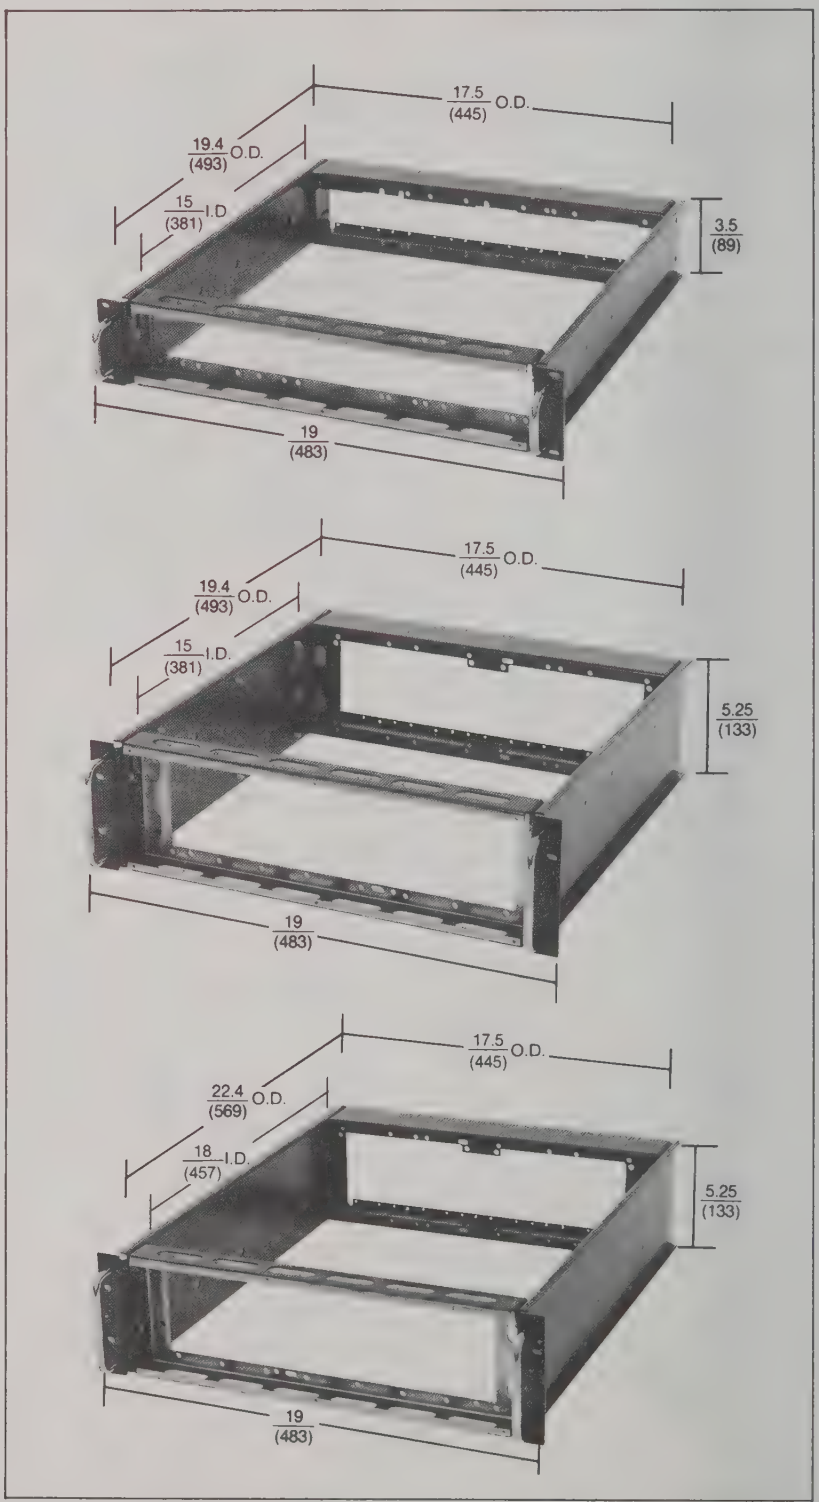

Note: All dimensions are in inches (mm)

See pages 4.12 thru 4.14 for rack accessories and sub-assemblies.

System Example: System 319-E3 comes completely assembled, wired, burned-in, tested and ready for use in your application. (In the suffix -E3, the letter defines front panel style and the number indicates module configuration.)
2 x STM 12-12 (12V @ 12A)
2 x PTM 5-4 (5V @ 4A)
Typical configuration system 319-E3.

3.5 x 19 x 19.4 in.
(89 x 483 x 493 mm)

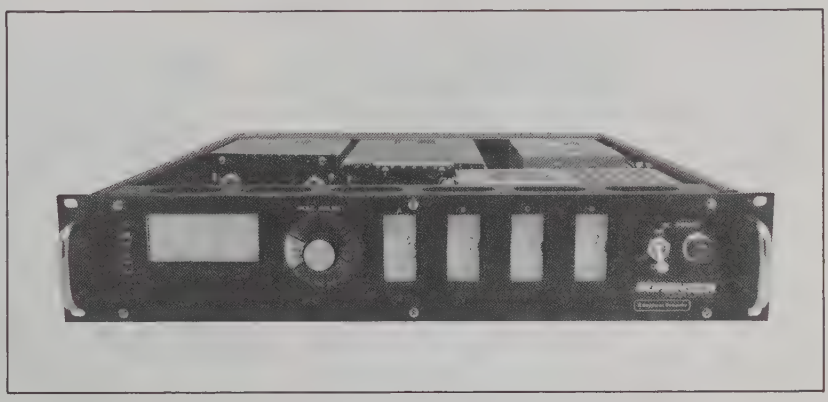

Typical Power Supply Case Configurations

319-1 CONFIGURATION

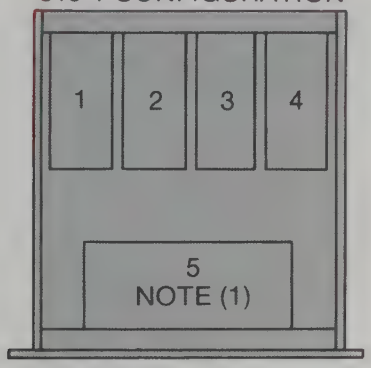

Up to 5 Case I Modules

319-2 CONFIGURATION

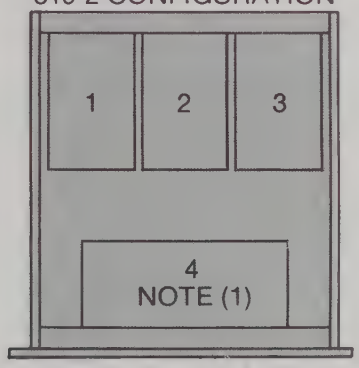

Up to 4 Case II Modules

319-3 CONFIGURATION

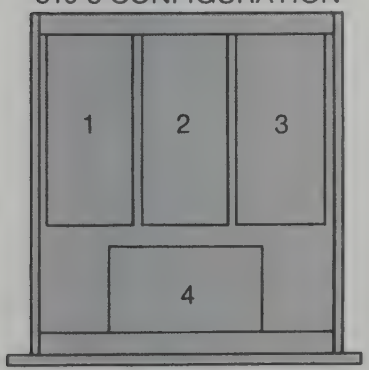

Up to 4 Case III Modules

319-4 CONFIGURATION

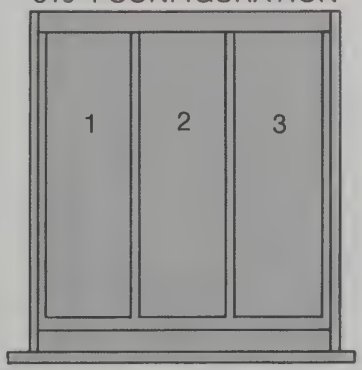

Up to 3 Case IIIA Modules

319-5 CONFIGURATION

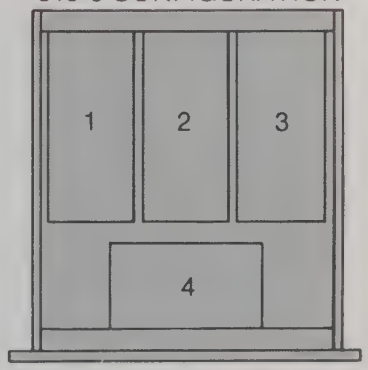

Up to 4 Case IA, IB, 2A
SLC-B Modules

NOTES: (1) Case IIIA, III, II or I allowable in this position.

System 519
Power Assembly

System Example: System 519-B2 comes completely assembled, wired, burned-in, tested and ready for use in your application. (In the suffix -B2, the letter defines front panel style and the number indicates module configuration.)
1 x PTM 5-7 (5V @ 7A)
1 x PTM 15-3.5 (15V @ 3.5A)
1 x PTM 12-4.4 (12V @ 4.4B)
1 x SSD 5-45 (5V @ 45A)
Typical configuration system 519-B2.

5.25 x 19 x 19.4 in.
(133 x 483 x 493 mm)

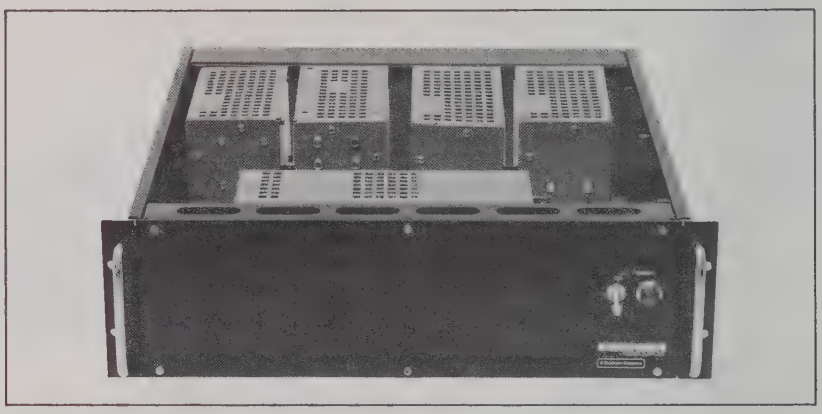

Typical Power Supply Case Configurations

519-1 CONFIGURATION

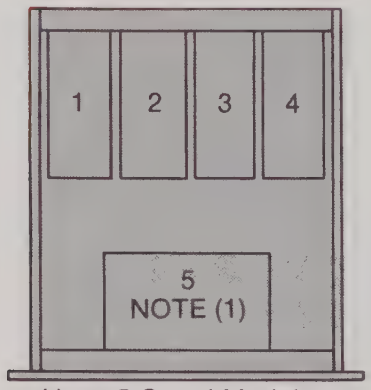

Up to 5 Case I Modules

519-2 CONFIGURATION

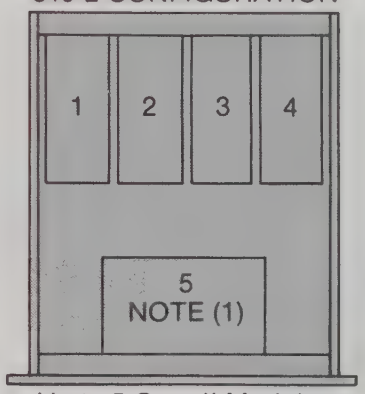

Up to 5 Case II Modules

519-3 CONFIGURATION

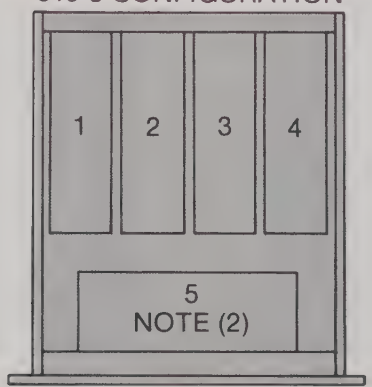

Up to 5 Case III Modules

519-4 CONFIGURATION

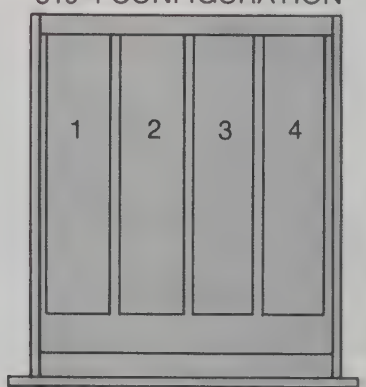

Up to 4 Case IIIA Modules

NOTE: (1) Case IIIB, IIIA, III, II, or I allowable in this position.
(2) Case IIIA, III, II, or I allowable in this position provided no QSA with OVP is mounted in position 1-4.

SORENSEN
RAYTHEON
Sorensen Company, 676 Island Pond Road, Manchester, NH 03103 USA (603) 668-4500 TWX 710-220-1339

519-5 CONFIGURATION

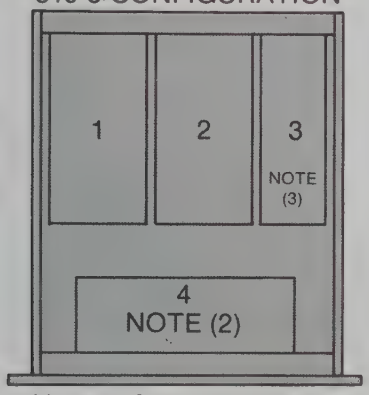

Up to 2 Case IIIB Modules

519-6 CONFIGURATION

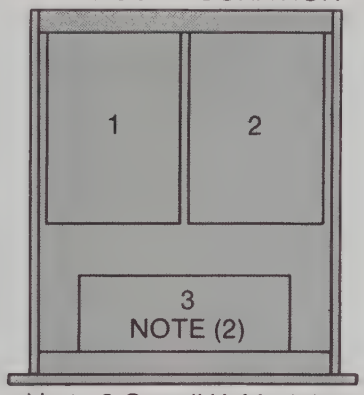

Up to 2 Case IVA Modules

519-7 CONFIGURATION

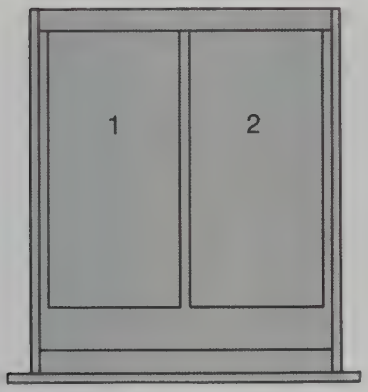

Up to 2 Case VI Modules

519-8 CONFIGURATION

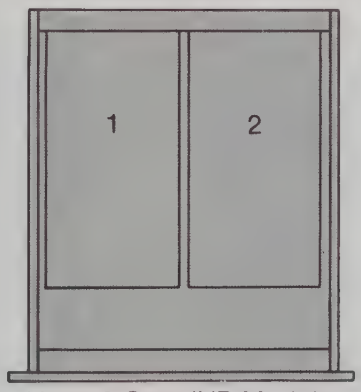

Up to 2 Case IVB Modules

519-9 CONFIGURATION

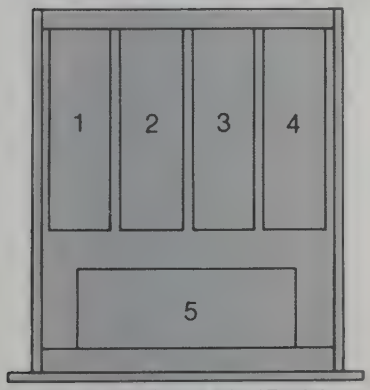

Up to 5 Case IA, IB, 2A
SLC-B Modules

519-10 CONFIGURATION

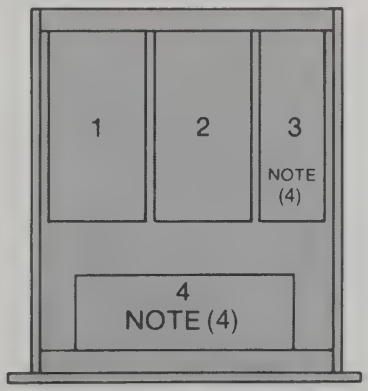

Up to 2 Case 2B, 3
SLC-B Modules

519-11 CONFIGURATION

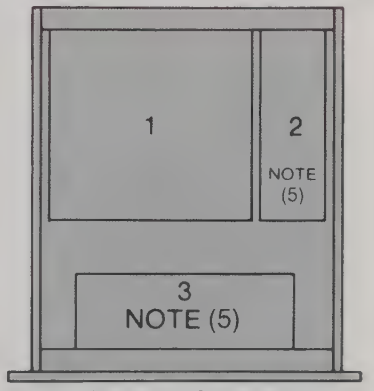

Up to 1 Case 4
SLC-B Modules

NOTES: (2) Case IIIA, III, II or I allowable in this position provided no QSA with OVP is mounted in positions 1-3 (519-5) or 1-2 (519-6).
(3) Module III, II or I allowable in this position.
(4) Case IA, IB, 2A allowable in this position.
(5) Case IA, IB, 2A, 2B allowable in this position.

System 522
Power Assembly

System Example: System 522-C6 comes completely assembled, wired, burned-in, tested and ready for use in your application. (In the suffix -C6, the letter defines front panel style and the number indicates module configuration.)
1 x STM 5-60 (5V @ 60A)
1 x PTM 12-6.5 (12V @ 6.5A)
1 x STM 28-7 (28V @ 7A)
1 x SSD 24-13 (24V @ 13A)
Typical configuration system 522-C6.

5.25 x 19 x 22.4 in.
(133 x 483 x 569 mm)

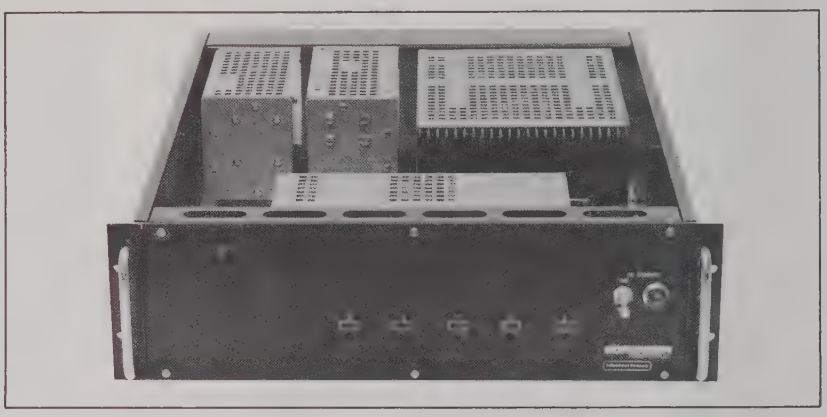

Typical Power Supply Case Configurations

522-1 CONFIGURATION

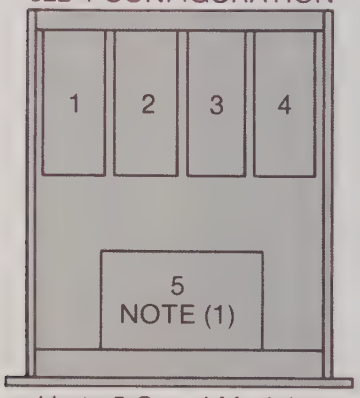

Up to 5 Case I Modules

522-2 CONFIGURATION

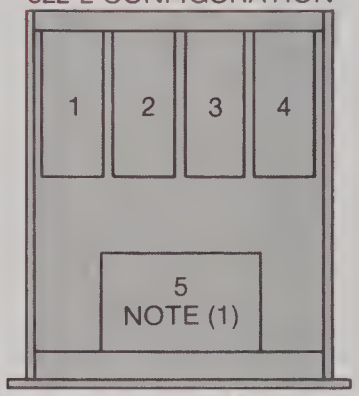

Up to 5 Case II Modules

522-3 CONFIGURATION

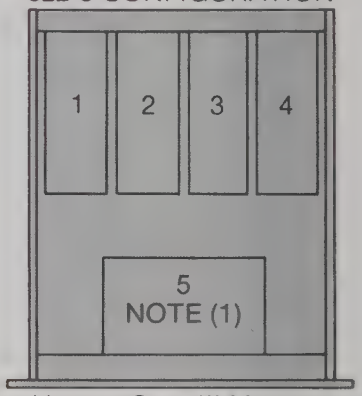

Up to 5 Case III Modules

522-4 CONFIGURATION

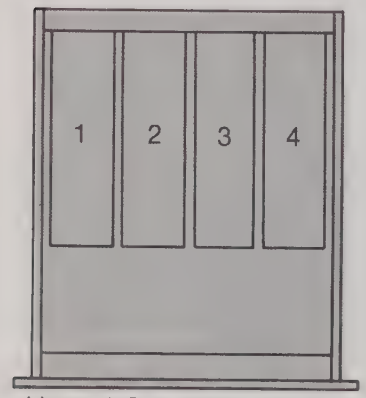

Up to 4 Case IIIA Modules

522-5 CONFIGURATION

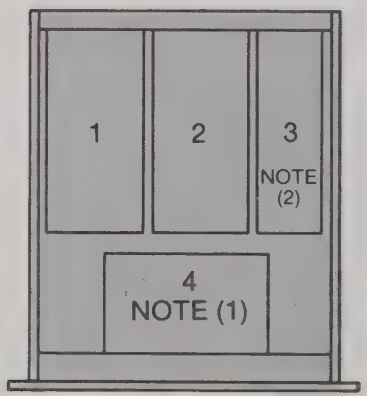

Up to 3 Case IIIB Modules

522-6 CONFIGURATION

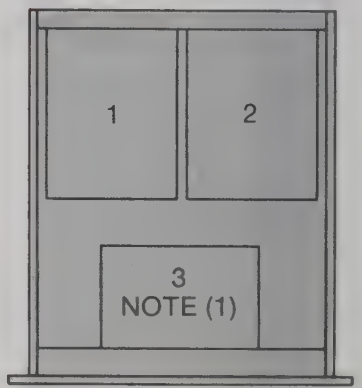

Up to 2 Case IVA Modules

NOTES: (1) Case IIIB, IIIA, III, II or I allowable in this position.
(2) Case III, II, or I allowable in this position.

SORENSEN
RAYTHEON
Sorensen Company, 676 Island Pond Road, Manchester, NH 03103 USA (603) 668-4500 TWX 710-220-1339

522-7 CONFIGURATION

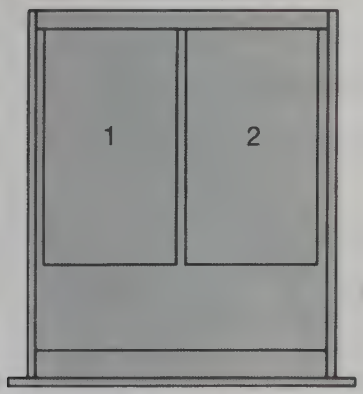

Up to 2 Case VI Modules

522-8 CONFIGURATION

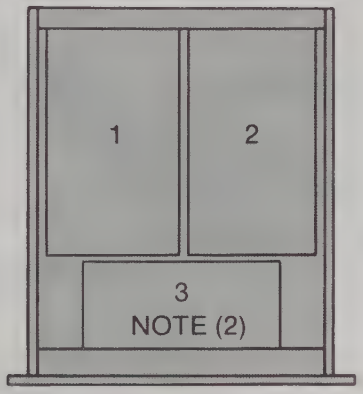

Up to 2 Case IVB Modules

522-9 CONFIGURATION

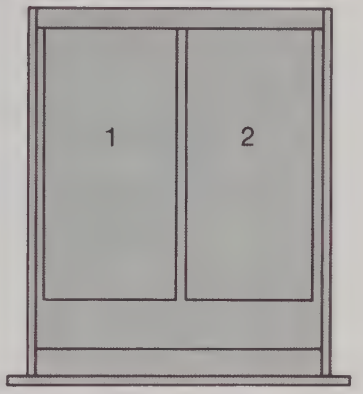

Up to 2 Case VIA Modules

522-11 CONFIGURATION

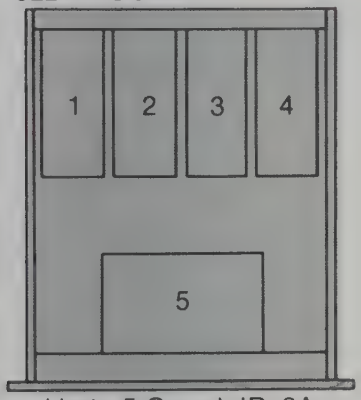

Up to 5 Case I, IB, 2A SLC-B Modules

522-12 CONFIGURATION

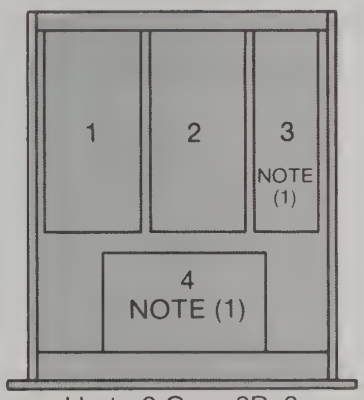

Up to 2 Case 2B, 3 SLC-B Modules

522-13 CONFIGURATION

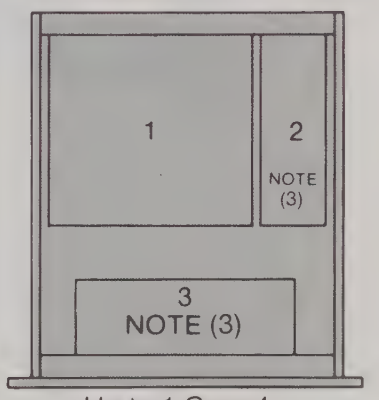

Up to 1 Case 4 SLC-B Modules

NOTES: (1) Case IA, IB, 2A allowable in this position.
(2) Case III, II, or I allowable in this position.
(3) Case 1A, 1B, 2A, 2B allowable in this position.

Power Assemblies

Rack Accessories (standard)

Chassis slides Available for chassis 319, 519 and 522.

AC 319 Kit #587552-1
AC 519 Kit #587552-1
AC 522 Kit #587552-2

Line Cord Standard line cord terminated to ac input (18A max limit)

Open-Sense Diode Protection Eliminates power supply responding to accidental remote sense open circuit

To specify your rack assembly power supply requirements, copy the form on page 7.3

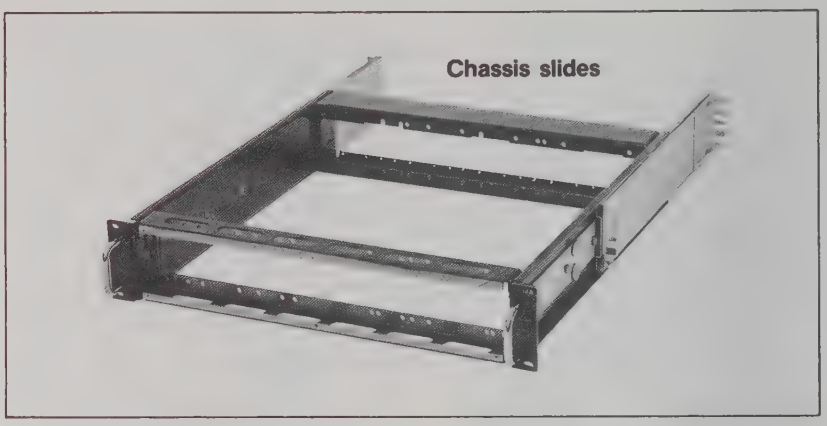

Rack Sub-Assemblies (standard)

Because of the complexity of Power Assemblies, it is recommended that you purchase a factory-assembled system as described previously. However, in certain special applications, you may prefer to design and assemble your own system. For these applications, Sorensen offers selected sub-assemblies and accessories.

Select the desired sub-assembly from the listing below. This will be determined by the size and number of the models to be assembled.

Note that you must provide any front panel controls or metering using the blank panel offered. No rear panels are available.

For these units you must assemble and wire the modules, and test the completed system.

AC300 Rack Chassis
Accepts up to 4 Case I Power Supplies
Accepts up to 3 Case II Power Supplies
Accepts up to 3 Case III Power Supplies

Accepts PF 300 blank panel

AC500 Rack Chassis
Accepts up to 4 Case I Power Supplies
Accepts up to 4 Case II Power Supplies
Accepts up to 4 Case III Power Supplies
Accepts up to 4 Case IIIA Power Supplies
Accepts up to 2 Case IIIB, IV, IVA, VI Power Supplies

Accepts PF500 blank panel

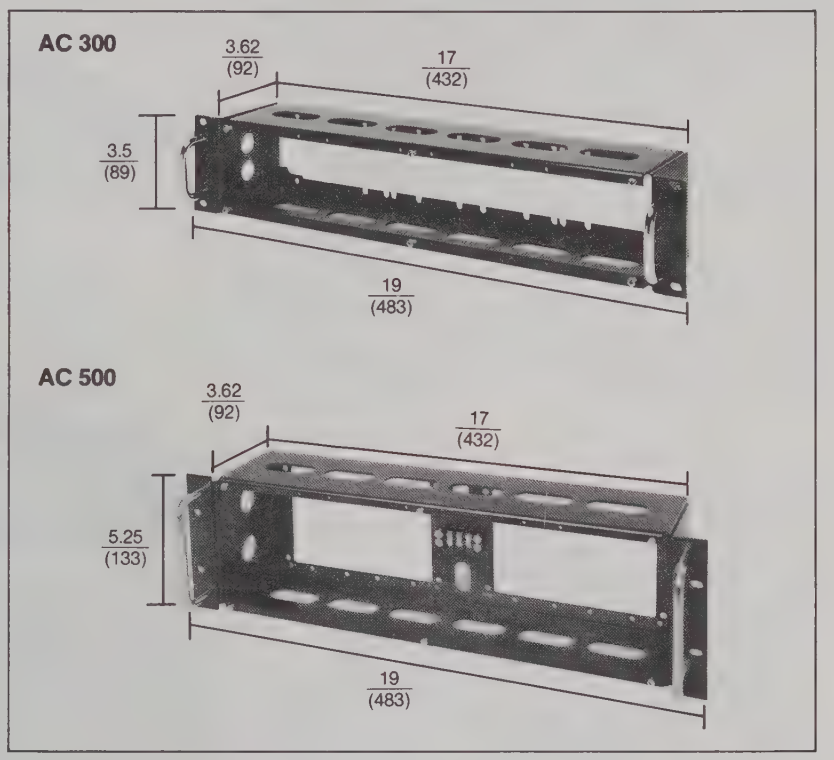

Note: All dimensions are in inches (mm)

Rack Sub-Assemblies

AC-318 Rack Chassis

Accepts up to 8 Case I Power Supplies
Accepts up to 6 Case II Power Supplies
Accepts up to 4 Case III Power Supplies

Accepts PF 300 blank panel
Accepts Slide Kit #587552-1

AC-319 Rack Chassis

See page 4.6 for case size and dimensions.

Accepts PF 300 blank panel
Accepts Slide Kit #587552-1

AC-320 Rack Chassis

Accepts up to 8 Case I Power Supplies
Accepts up to 6 Case II Power Supplies
Accepts up to 4 Case III Power Supplies

Accepts PF 300 blank panel
Accepts Slide Kit #587552-2

AC-518 Rack Chassis

Accepts up to 8 Case I Power Supplies
Accepts up to 5 Case II or III Power Supplies
Accepts up to 4 Case IIIA Power Supplies
Accepts up to 3 Case IIIB Power Supplies
Accepts up to 2 Case IV, IVA or VI Power Supplies

Accepts PF 500 blank panel
Accepts Slide Kit #587552-1

AC-519 Rack Chassis

See page 4.6 for case size and dimensions.

Accepts PF 500 blank panel
Accepts Slide Kit #587552-1

AC-520 Rack Chassis

Accepts up to 8 Case I or II Power Supplies
Accepts up to 5 Case III or IIIA Power Supplies
Accepts up to 3 Case IIIB Power Supplies
Accepts up to 2 Case IV, IVA or VI Power Supplies

Accepts PF 500 blank panel
Accepts Slide Kit #587552-2

AC-522 Rack Chassis

See page 4.6 for case size and dimensions.

Accepts PF 500 blank panel
Accepts Slide Kit #587552-2

AC 318

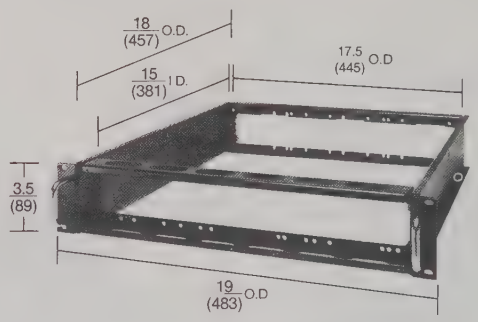

AC 320

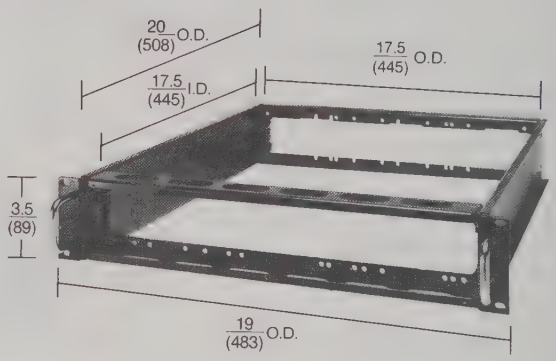

AC 518

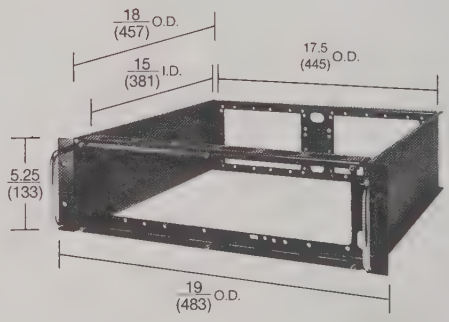

AC 520

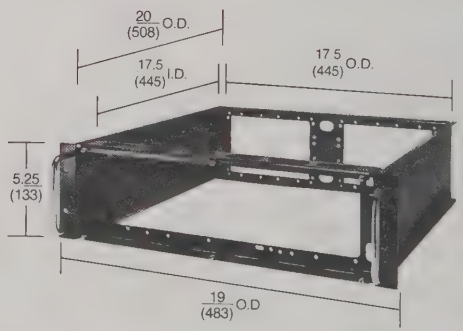

SORENSEN

Variable Programming Laboratory and Industrial Power Supplies SRL Series

- 14 models in voltage ranges from 0-10V dc to 0-60V dc with power levels from 250 to 2100 watts
- 115/208/230V ac single phase input available on all models except SRL 40-50 and SRL 60-35 which are 208/230V ac single phase only
- 50/60 Hz operation without derating
- SCR pre-regulation and linear series pass design provide high efficiency and performance with low rms ripple and pk-pk noise
- Remote voltage or resistance programming in voltage or current modes
- Excellent voltage or current regulation with automatic crossover
- Unique quick set and check of built-in overvoltage protection can be monitored and adjusted on front panel. Set point can be adjusted without removing load or ac power
- No overshoot at turn-on, turn-off or power failure
- 5 year warranty

The SRL series power supply incorporates all the benefits of a linear series pass design with pre-regulation to provide an additional bonus of high efficiency and outstanding performance.

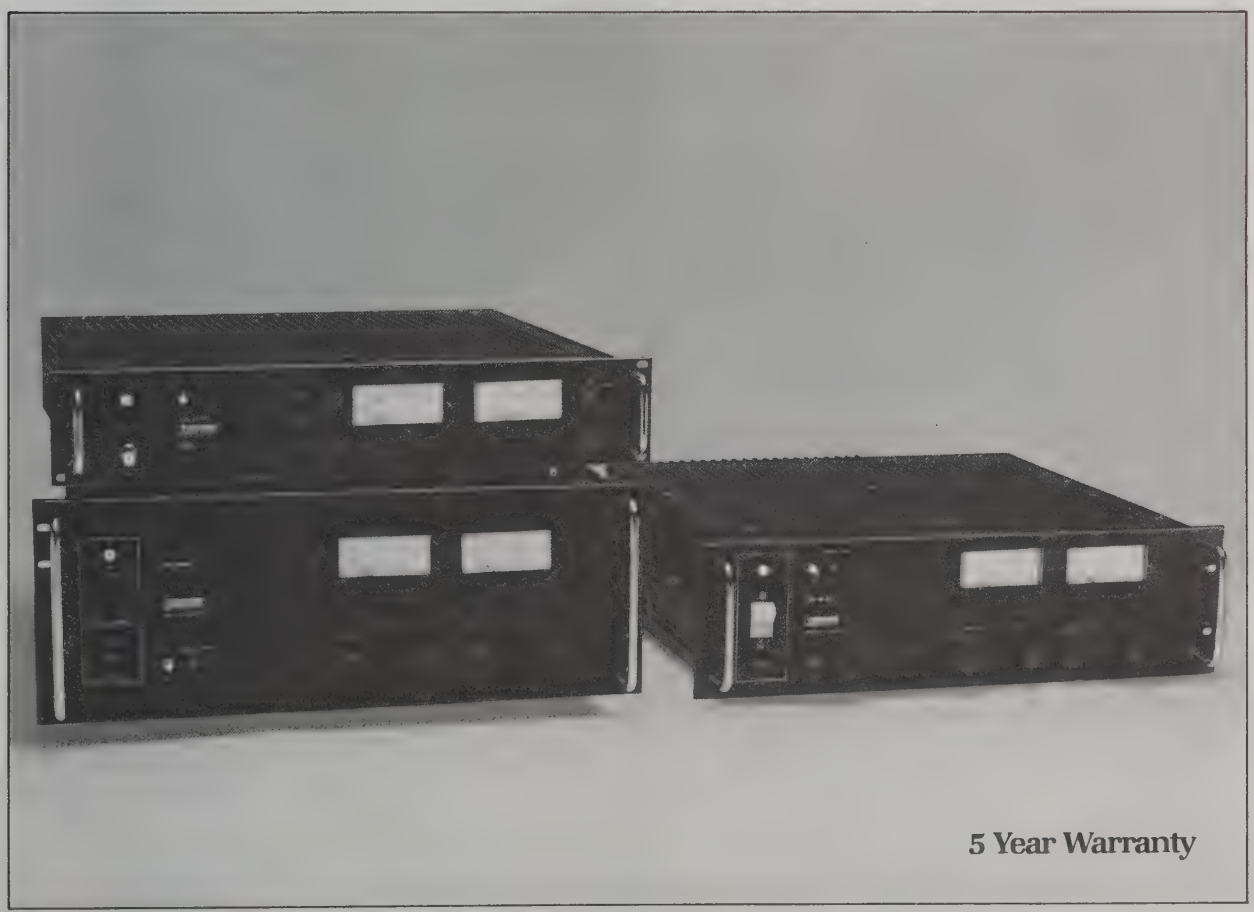

SRL Series
Model Specifications

DC OUTPUT
CONSTANT VOLTAGE MODE

Voltage Regulation:
Line and load combined:
.01% or 2mV, whichever is greater

Temperature Coefficient:
0.01% +0.2mV/°C.

Resistance Programming:
200 ohms per volt standard; (adjustable to 1000 ohms per volt through the use of externally added components).

Voltage Programming:
Volt per volt standard.

Stability:
0.025% +0.5mV for 8 hours after 30 minute warm-up time with constant line, load and operating temperature.

Remote Sensing:
1V maximum drop per load lead (rear terminal connection).

Transient Response:
150 μs (typical) to return to a bandwidth of ±10 mV for step load change of 0 to 100% of full load.

CONSTANT CURRENT MODE

Current Programming:
1000 ohms programs full rated output.

Voltage Signal Programming:
Consult factory or operating manual.

Current Regulation:
0.02% +6mA line or load.

Minimum Current:
Adjustable down to zero.

Temperature Coefficient:
0.01% +2mA per °C.

Stability:
0.03% +10mA (Typical for 8 hours after 30 minute warm-up time with constant line, load, and ambient operating temperature.)

AC INPUT

Voltage:
105-125V ac single phase (SRL 40-50 and SRL 60-35, 190-230V ac single phase).

Voltage Options:
190-230V ac add M1 to model number. 210-250V ac add M2 to model number. For M1 and M2 voltage options, consult factory for price.

Frequency:
47-63 Hz without derating.

OPERATING DATA

Ambient Operating Temperature Range:
0 to + 70°C

Storage Temperature Range:
−40°C to +85°C

Series Operation:
200V dc maximum.

Parallel Operation:
Master-slave or straight parallel; 3 units maximum in master slave.

RFI:
MIL 1-6181D

Automatic Crossover:
Automatic between voltage and current modes.

Overvoltage Protection:
Built-in adjustable crowbar, 10μs operation. May be checked or adjusted from front panel without removing ac power or load.

SRL ACCESSORIES

Chassis Slides (Kit):
Available for convection cooled models. See dimensional drawings.

Digital Programmer:
Available for all models in SRL series. IEEE-488 interface to GPIB bus. Order Model 488 DAP.

Model	Current (A dc) 40°C	55°C	70°C	Ripple Voltage Mode rms-	pk-pk	Current Mode rms	Case	Efficiency (typ)	Input Current Max. (A ac)*
0-10V									
SRL 10-25	27.5	25	16.7	350μV	20mV	10mA	II	46%	7.5
SRL 10-50	50.0	50	33.5	300μV	10mV	20mA	II	43%	14.7
SRL 10-100	100.0	100	67.0	300μV	20mV	30mA	III	46%	32.5
0-20V									
SRL 20-12	13.5	12	8.0	200μV	20mV	3mA	I	42%	7.8
SRL 20-25	27.5	25	16.7	300μV	20mV	10mA	II	53%	13.6
SRL 20-50	50.0	50	33.5	500μV	40mV	10mA	III	54%	28.0
0-40V									
SRL 40-6	7.5	6	4.0	200μV	20mV	0.5mA	I	56%	6.3
SRL 40-12	13.5	12	8.0	300μV	20mV	1mA	II	60%	13.2
SRL 40-25	25.0	25	16.7	500μV	10mV	10mA	II	60%	22.0
SRL 40-50	50.0	50	33.5	700μV	50mV	10mA	III	63%	25.0**
0-60V									
SRL 60-4	4.5	4	2.68	300μV	20mV	0.5mA	I	50%	6.0
SRL 60-8	9.0	8	5.36	300μV	20mV	1mA	II	64%	12.5
SRL 60-17	17.0	17	11.4	500μV	10mV	3mA	II	62%	22.0
SRL 60-35	35.0	35	23.4	700μV	40mV	10mA	III	67%	26.0**

Specifications subject to change without notice.
*Standard model has 105-125V ac input. **Models SRL 40-50 and SRL 60-35 have 190-230V ac input.

CASE I (3.5" High)

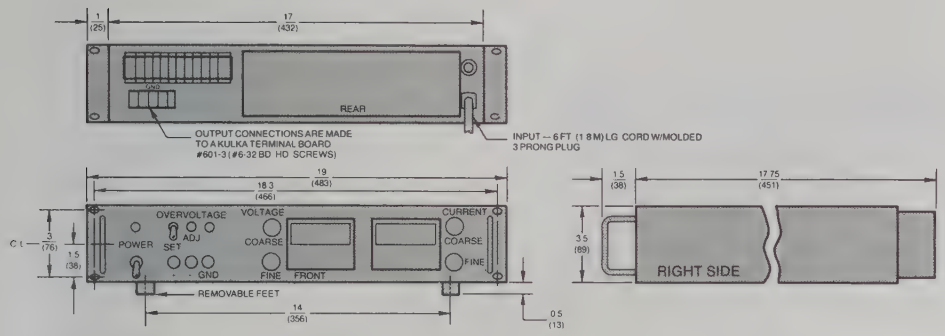

Model	Net Weight lbs.	Net Weight kg.	Cooling	Slide Kit Part Number
SRL 20-12	45	20.4	Convection	587552-1
SRL 40-6	44	20.0	Convection	587552-1
SRL 60-4	44	20.0	Convection	587552-1

CASE II (5.25" High)

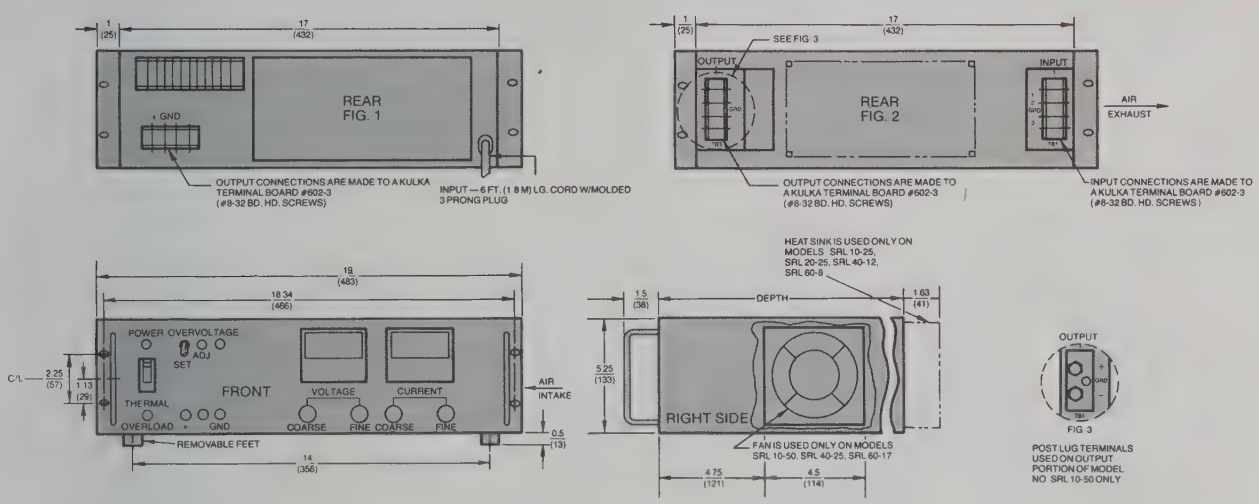

Model	Depth	Rear View	Net Weight lbs.	Net Weight kg.	Cooling	Slide Kit Part Number
SRL 10-25	16.2 (409)	Fig. 1	64	29	Convection	587552-1
SRL 10-50	21 (533)	Fig. 2	81	36	Fan	N/A
SRL 20-25	16.2 (409)	Fig. 1	64	29	Convection	587552-1
SRL 40-12	16.2 (409)	Fig. 1	64	29	Convection	587552-1
SRL 40-25	21 (533)	Fig. 2	95	43	Fan	N/A
SRL 60-8	16.2 (409)	Fig. 1	64	29	Convection	587552-1
SRL 60-17	21 (533)	Fig. 2	95	43	Fan	N/A

Note: All dimensions are in inches
(mm)

SRL Series
Dimensional Drawings

CASE III (7" High)

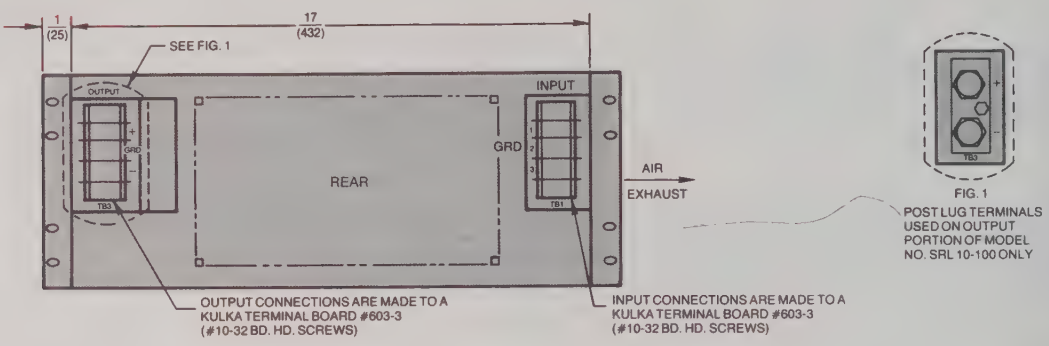
1 (25)
17 (432)
SEE FIG. 1
OUTPUT
INPUT
GRD
REAR
AIR EXHAUST
TB3
TB1
OUTPUT CONNECTIONS ARE MADE TO A KULKA TERMINAL BOARD #603-3 (#10-32 BD. HD. SCREWS)
INPUT CONNECTIONS ARE MADE TO A KULKA TERMINAL BOARD #603-3 (#10-32 BD. HD. SCREWS)
FIG. 1
POST LUG TERMINALS USED ON OUTPUT PORTION OF MODEL NO. SRL 10-100 ONLY

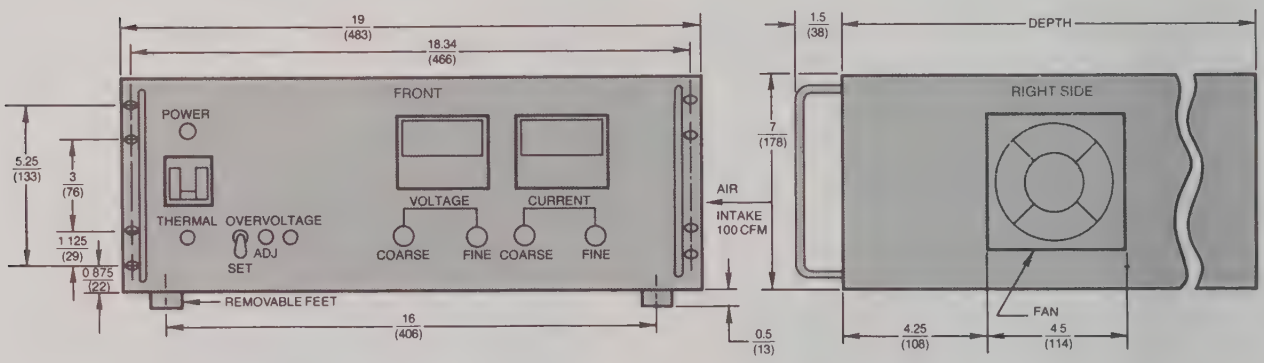

Model	Depth	Weight lbs.	Weight kg.	Cooling
SRL 10-100	23 (584)	132	(60)	Fan
SRL 20-50	21 (533)	128	(58)	Fan
SRL 40-50	21 (533)	120	(54)	Fan
SRL 60-35	21 (533)	120	(54)	Fan

Note: All dimensions are in inches (mm)

SORENSEN
RAYTHEON
Sorensen Company, 676 Island Pond Road, Manchester, NH 03103 USA (603) 668-4500 TWX 710-220-1339

SORENSEN

High Power Single Phase Input Laboratory and Industrial Power Supplies DCRB Series

- 31 models in nine voltage ranges from 0-7V dc to 0-600V dc with power levels from 400 to 2700 watts
- 115V ac single phase input standard (208/220/230V ac single phase optional) on all convection cooled models (up to 1800 watts)
- 208V ac single phase input standard (220/230V ac optional) on all fan cooled models (over 2000 watts)
- 50/60 Hz operation without derating
- Low ripple and noise
- Excellent voltage or current regulation with automatic crossover. Panel lights indicate operating mode.
- Remote voltage or resistance programming in voltage and current modes
- Adjustable Current Limiting (overload/short circuit protection) with automatic recovery
- Overvoltage protection standard on all models
- 5 year warranty

The DCRB series incorporates a single phase input SCR controlled regulator providing high efficiency and fully adjustable output power.

5 Year Warranty

DCRB Series
Specifications

DC OUTPUT
CONSTANT VOLTAGE MODE

Voltage Regulation:
Line and load combined
0-7 and 0-10V dc models
0.1% or 5mV, whichever is greater
0-20 to 0-80V dc models
0.05% or 10mV, whichever is greater
0-150 to 0-600V dc models
0.05% or 75mV, whichever is greater

Temperature Coefficient:
0.015%/°C of E_0 max.

Resistance Programming:
See model specification chart.

Voltage Programming:
Consult instruction manual.

Stability:
0.1% E_0 max for 8 hours after 30 minute warm-up.

Remote Sensing:
Maximum drop per load lead should not exceed 5% of E_0 max. or 3V, whichever is smaller.

Transient Response:
0-10 to 0-600V dc models
50mS (typical) to return to ±1%* band for step load change of 50 to 100% of full load.
* ±2% or 20V model, ±3% of 10V model.
0-7V dc model
100mS (typical) to return to ±3% band for step load change of 67 to 100% of full load.

CONSTANT CURRENT MODE

Current Regulation:
0.25% of I_0 max. line and load combined. (0.5% for 7V model)

Temperature Coefficient:
0.03%/°C. of I_0 max.

Current Programming:
See model specification chart.

Stability:
0.15% of I_0 max. for 8 hours after 30 minute warm-up.

AC INPUT

Voltage:
103-127V ac single phase for models 400 to 1800 watts. 187-229V ac single phase for 2100-2700 watt models.

Voltage Options:
Optional inputs available. Consult local sales office or factory for modification price.

Frequency:
49-63 Hz single phase.
(Ripple and transient response specs apply only at 60 Hz).

OPERATING DATA

Ambient Operating Temperature Range:
0 to + 70°C

Storage Temperature Range:
–40°C to +85°C.

Efficiency:
61-86% depending on model.

Series Operation:
200V dc max. output (150 and 300V models two in series).

Parallel Operation:
Master-slave or straight parallel; four units maximum in master slave.

Overshoot:
No overshoot at turn-on, turn-off or power failure.

Overvoltage Protection:
Now factory installed on all DCRB models.

Remote Shutdown:
Remote relay, transistor or logic switching can be connected to shutdown terminals on back of supply.

Cooling:
Convection cooled on 400 to 1800 watt models. Built-in fan on 2100-2700 watt models.

DCRB ACCESSORIES

Digital Programmer:
Available for all models in DCRB series. IEEE-488 interface to GPIB bus. Order Model 488 DAP.

Chassis Slide (Kit):
Available for all convection cooled models and fan cooled DCR 7-300B only. Consult factory.

Model	Current (A dc) 40°C	50°C	70°C	Input Current (A ac) at Standard Input Voltage	rms Ripple Constant Voltage (mV)	rms Ripple Constant Current (mA)	Resistive Programming Voltage Mode (Ohms/V)	Resistive Programming Current Mode (Ohms/A)	Case	Efficiency (typ)
0-7V										
DCR 7-300B	300	225	150	27.5*	65	2800	1710	0.33	V	65%
0-10V										
DCR 10-40B	40	30	20	8.7	65	260	1200	10.0	I	61%
DCR 10-80B	80	60	40	16.0	65	520	1200	5.0	II	62%
DCR 10-120B	120	90	60	24.5	65	785	1200	3.3	III	62%
0-20V										
DCR 20-25B	25	19.3	13	9.4	65	82	600	16.0	I	71%
DCR 20-50B	50	37.5	25	20.0	65	125	600	8.0	II	69%
DCR 20-80B	80	60.0	40	30.0	65	260	600	5.0	III	70%
DCR 20-115B	115	86.5	58	26.5*	65	375	600	3.5	IV	70%
0-40V										
DCR 40-13B	13	9.8	6.6	9.8	90	30	300	30	I	71%
DCR 40-25B	25	19.3	13.0	16.0	90	56	300	16	II	79%
DCR 40-40B	40	30.0	20.0	26.8	90	90	300	10	III	78%
DCR 40-70B	70	55.0	40.0	29.6*	90	157	300	6	IV	77%
0-60V										
DCR 60-9B	9	7.0	5.0	9.7	125	19	200	46	I	75%
DCR 60-18B	18	13.3	8.6	19.0	125	38	200	22	II	81%
DCR 60-30B	30	23.3	16.5	27.0	125	63	200	16	III	84%
DCR 60-45B	45	35.8	26.5	29.0*	125	93	200	9	IV	80%
0-80V										
DCR 80-6B	6	4.7	3.3	8.3	150	12	150	68	I	77%
DCR 80-12B	12	9.3	6.6	15.0	150	23	150	33	II	83%
DCR 80-33B	33	26.5	20.0	27.2*	150	61	150	12	IV	81%
0-150V										
DCR 150-3B	3	2.4	1.7	8.2	300	6	80	134	I	74%
DCR 150-6B	6	4.7	3.3	15.5	300	12	80	66	II	84%
DCR 150-12B	12	9.3	6.6	27.0	300	24	80	33	III	84%
DCR 150-18B	18	14.0	10.0	27.0*	300	36	80	22	IV	83%
0-300V										
DCR 300-1.5B	1.5	1.2	0.8	8.9	700	4	40	270	I	74%
DCR 300-3B	3.0	2.3	1.7	15.7	700	7	40	133	II	82%
DCR 300-6B	6.0	4.7	3.3	27.0	700	14	40	66	III	84%
DCR 300-9B	9.0	7.3	5.5	27.4*	700	21	40	44	IV	83%
0-600V										
DCR 600-.75B	0.75	0.6	0.4	8.9	1200	2	20	530	I	74%
DCR 600-1.5B	1.5	1.2	0.8	15.2	1200	3	20	266	II	86%
DCR 600-3B	3.0	2.3	1.7	27.4	1200	6	20	133	III	86%
DCR 600-4.5B	4.5	3.5	2.5	26.8*	1200	9	20	89	IV	85%

Specifications subject to change without notice.
* 208V ac single phase input (all other models 115V ac input).

DCRB Series
Dimensional Drawings

CASE I (3.5" High)
Convection Cooled

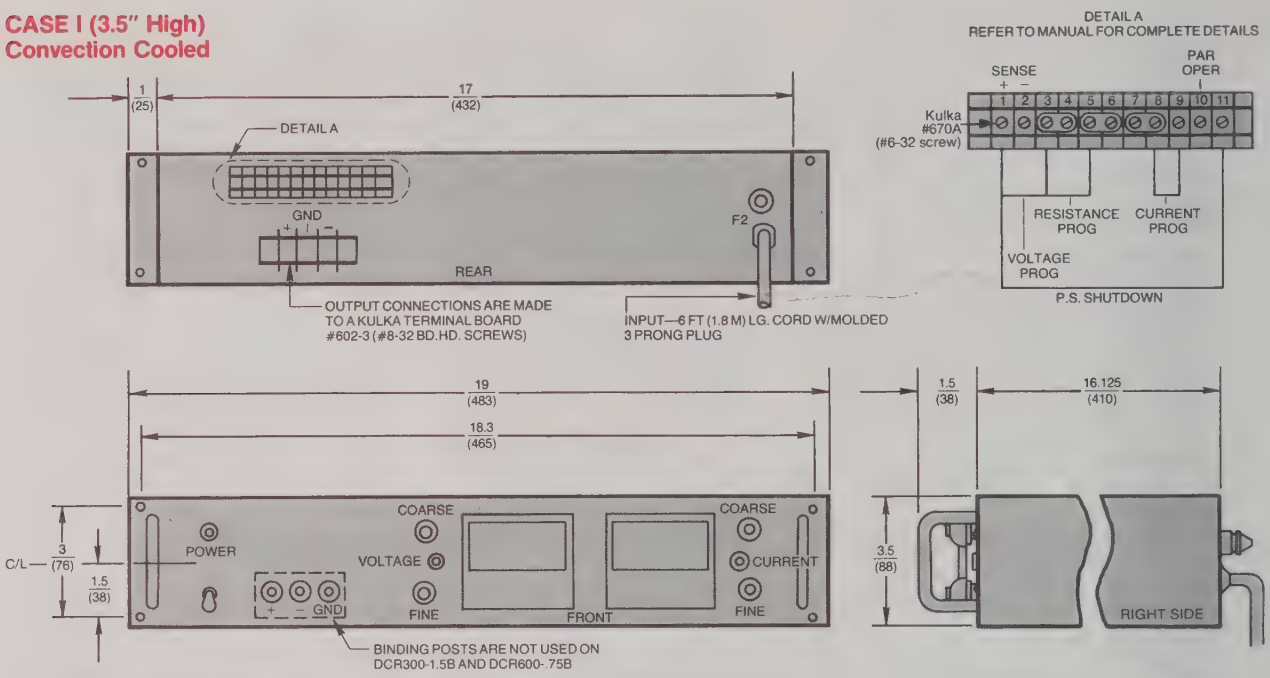

Wt	lb	kg
	40	18.1

Note: Slide-rail option available.

Note: All dimensions are in inches (mm)

CASE II (5.25" High)
Convection Cooled

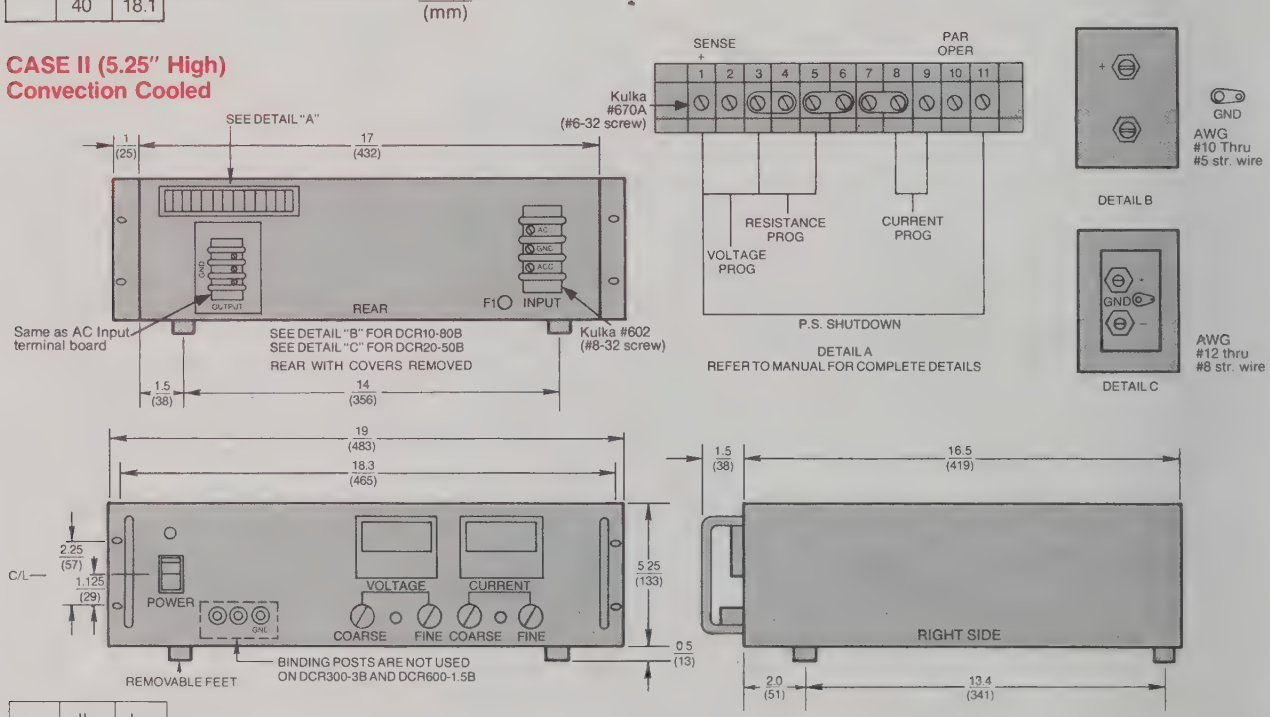

Wt.	lb.	kg
	70	31.7

Note: Slide-rail option available. Note: All dimensions are in inches (mm)

SORENSEN RAYTHEON Sorensen Company, 676 Island Pond Road, Manchester, NH 03103 USA (603) 668-4500 TWX 710-220-1339

Dimensional Drawings

CASE III (7" High) Convection Cooled

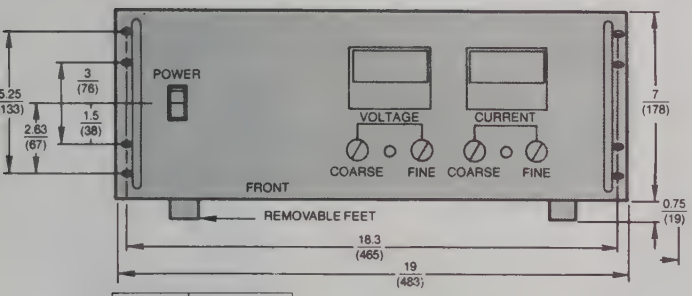

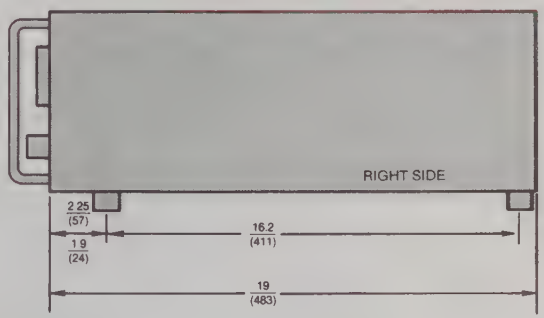

CASE	Weight	
	lb.	kg.
III	90	40.8

Note: Slide-rail option available.

CASE IV (7" High) Fan Cooled

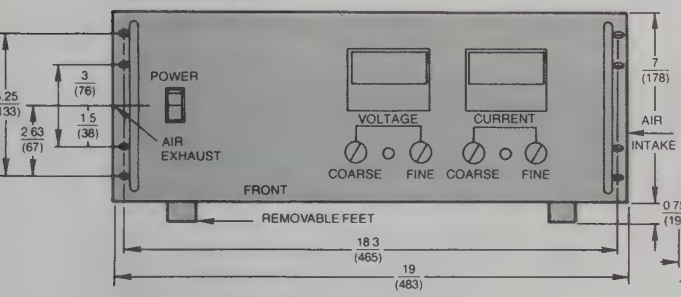

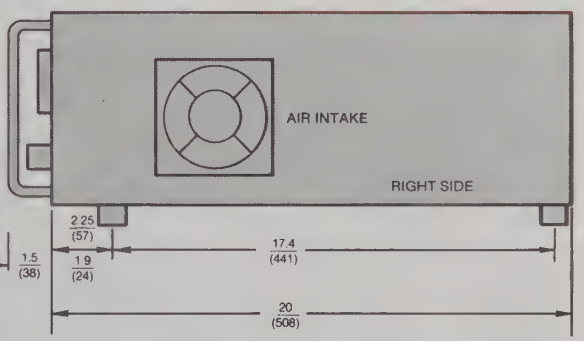

CASE	Weight	
	lb.	kg.
IV	130	58.9

CASE III & IV REAR TERMINAL DETAILS

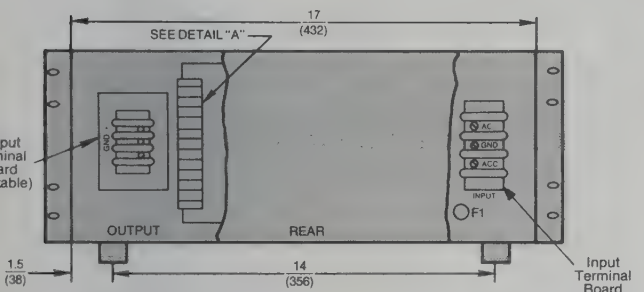

Note: All dimensions are in inches (mm)

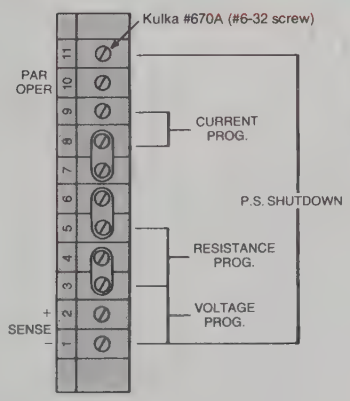

DETAIL "A"
REFER TO MANUAL FOR COMPLETE DETAILS

DETAIL B
AWG #2 thru #2/0 str. wire



DETAIL C
AWG #10 thru #6 str. wire

AWG #12 thru #8 str. wire

DETAIL D

Input/Output Terminal Data

Terminal	Model	CASE III	Model	Case IV
AC		Kulka 602 (#8-32 screw)		Kulka 603 (#10-32 screw)
DC	DCR 10-120B	See Detail B	DCR 20-115B	See Detail B
DC	DCR 20-80B	See Detail B	DCR 40-70B	See Detail C
DC	DCR 40-40B	See Detail D	DCR 60-45B	See Detail D
DC	All others:	Kulka 602 (#8-32 screw)	All others:	Kulka 603 (#10-32 screws)

DCRB Series
Dimensional Drawings

CASE V (7" High)
Fan Cooled

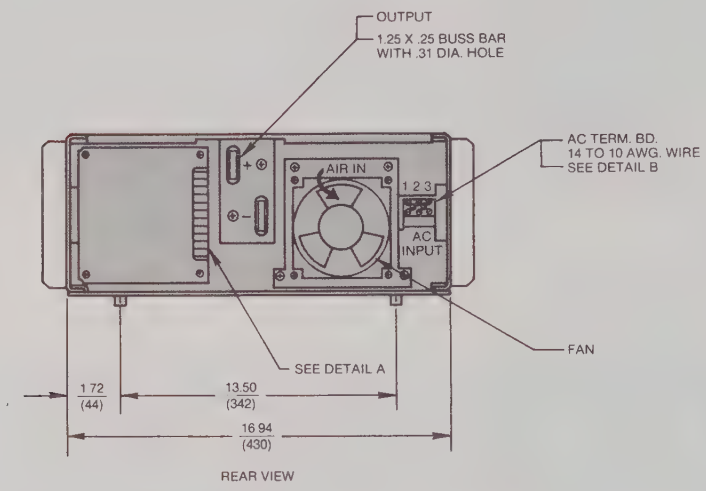

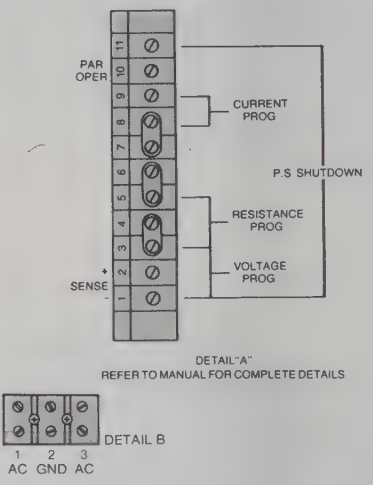

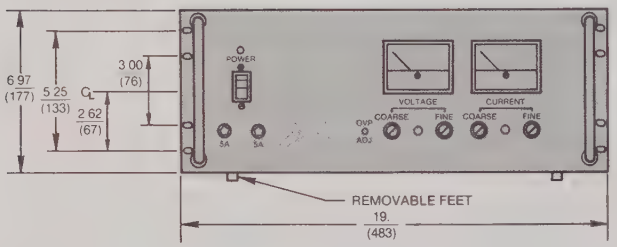

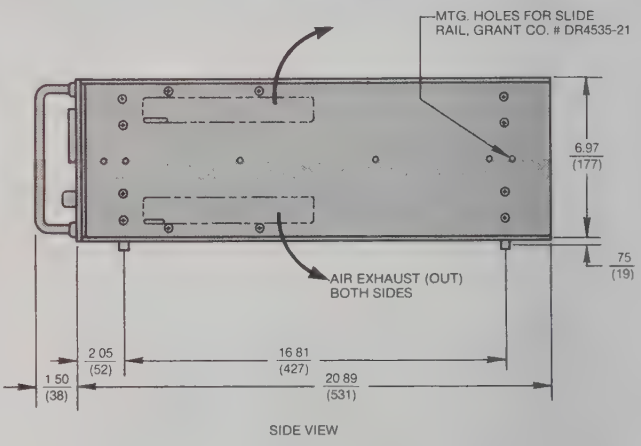

Wt.	lb.	kg.
	150	68

Note: All dimensions are in inches (mm)

SORENSEN
RAYTHEON
Sorensen Company, 676 Island Pond Road, Manchester, NH 03103 USA (603) 668-4500 TWX 710-220-1339

SORENSEN

High Power Three Phase Input Laboratory and Industrial Power Supplies DCRA Series

- 11 models in five voltage ranges, from 0-20V dc to 0-600V dc, with power levels from 5kW to 20kW
- 208V ac three phase input standard on 5kW models. 460V ac, three phase input standard on all others
- 50/60 Hz operation
- Optional input voltages available for 208/230/390/415V ac three phase operation
- Remote voltage or resistance programming in voltage or current modes
- Adjustable Current Limiting (overload/short circuit protection) with automatic recovery
- Excellent voltage or current regulation with automatic crossover
- Overvoltage protection available (except on 20kW models)
- 5 year warranty

The DCRA series incorporates a 3 phase input SCR controlled regulator producing high efficiency and fully adjustable output power.

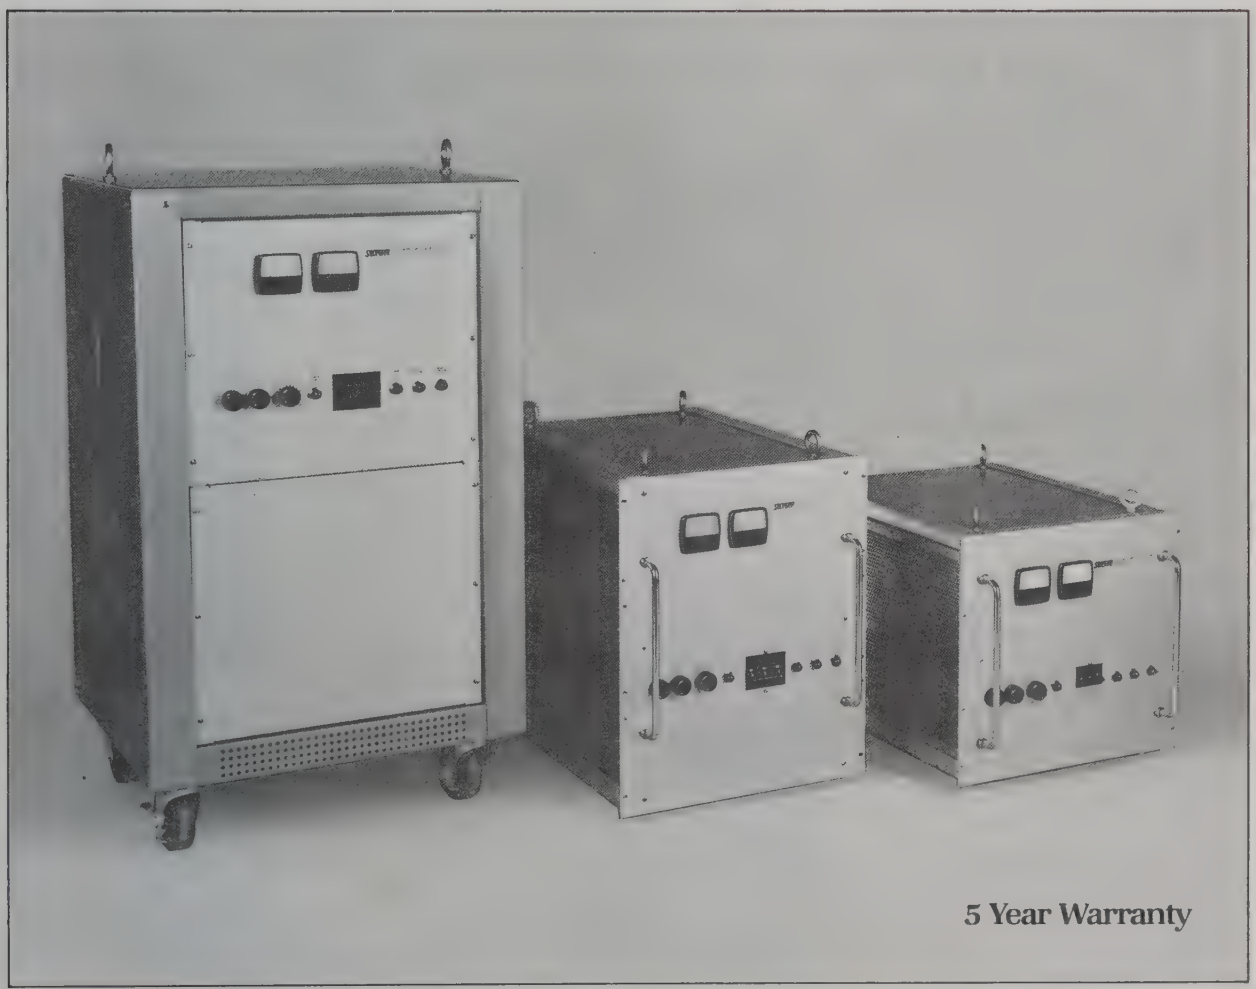

5 Year Warranty

DCRA Series
Specifications

DC OUTPUT
CONSTANT VOLTAGE MODE

Voltage Regulation:
0-20V dc to 0-40V dc models
Line and load combined:
0.2% or 30mV, whichever is greater

0-150V dc to 0-600V dc models
Line and load combined:
0.2% or 240mV, whichever is greater

Temperature Coefficient:
0.04%/°C of E_0 max.

Resistive Programming:
See model specification chart.

Voltage Programming:
Consult local sales office or factory.

Stability:
0.1% E_0 max for 8 hours after 30 minute warm-up.

Remote Sensing:
3V maximum drop per load lead but not to exceed 10% of E_0 max.

Transient Response:
40ms (typical) to return to ±1% band for a step load change. 50% to 100% or 100% to 50% of full load. (20V models ±2% band.)

CONSTANT CURRENT MODE

Current Regulation:
0.4% I_0 max. line and load combined.

Temperature Coefficient:
0.2%/°C. of I_0 max.

Current Programming:
See model specification chart.

Stability:
0.5% of I_0 maximum for 8 hours after 30 minute warm-up.

AC INPUT

Voltage:
187-229V ac three phase for 5kW models. 414-506V ac three phase for 10 and 20kW models.

Voltage Options:
Optional inputs available.
See page 5.17.

Frequency:
57-63 Hz all models.
49-63 Hz for 5kW models only.
49-63 Hz for 380/415V operation only on 10kW and 20kW models.

OPERATING DATA

Efficiency:
66-82% depending on model.

Series Operation:
200V dc maximum (150 and 300V models, two in series).

Parallel Operation:
Direct paralleling of any number of units.

Overvoltage Protection:
Optional adjustable crowbar protection available on all models except DCR 20-1000A and DCR 40-500A. Add suffix M5 to model number.

Ambient Operating Temperature Range:
0 to + 70°C

Storage Temperature Range:
–40°C to +85°C.

Cooling:
Forced air.

DCRA ACCESSORIES

Cabinet Style Side enclosures:
Available for all models with 17.5 inch (445 mm) and 22.75 inch (578 mm) front panel heights. Specify Kit CSE. Consult local sales representative for the following accessory pricing data.

Casters:
Standard on models DCR 20-1000A and DCR 40-500A. Available as option on all other models. Specify Kit CH.

Step Down Input Transformer:
380/415/460V ac three phase to 208/230V ac three phase @ 8kW for models DCR 20-250A, DCR 40-125A, DCR 150-35A, DCR 300-18A. Specify ST 101.

Digital Programmer:
Available for all models in DCRA series. IEEE-488 interface to GPIB bus. Order Model 488 DAP.

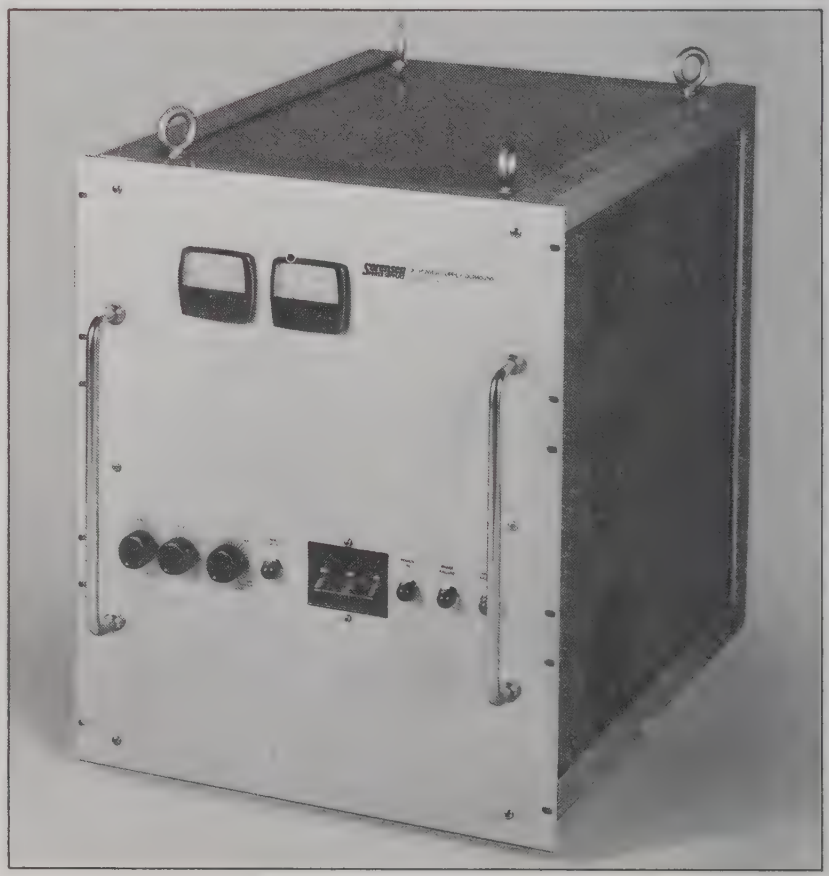

Model Specifications

Model	Current (A dc) 40°C	50°C	70°C	rms Ripple Constant Voltage (mV)	Constant Current (mA)	Resistive Programming Voltage Mode (Ohms/V)	Current Mode (Ohms/A)	Case	Input Line Current[1]	Efficiency (typ)
0-20V										
DCR 20-250A	275	250	165	160	2000	160	0.6	I	37	66%
DCR 20-500A	550	500	330	160	4000	160	0.3	II	29	70%
DCR 20-1000A	1100	1000	660	160	8000	160	0.15	III	60	74%
0-40V										
DCR 40-125A	138	125	82.5	160	562.5	80	1.2	I	35	72%
DCR 40-250A	275	250	165	160	1125	80	0.6	II	27	75%
DCR 40-500A	550	500	330	160	2250	80	0.3	III	60	79%
0-150V										
DCR 150-35A	38.5	35	23	500	140	20	4.3	I	35	77%
DCR 150-70A	77.0	70	47	500	280	20	2.2	II	27	81%
0-300V										
DCR 300-18A	19.8	18	12	1000	72	10	8.3	I	35	78%
DCR 300-35A	38.5	35	23	1000	140	10	4.3	II	27	82%
0-600V										
DCR 600-18A	19.8	18	12	2000	72	5	8.3	II	27	81%

Factory installed OVP option: Available on all models except DCR20-1000A and DCR40-500A. To order, add suffix M5 to model number. Example: DCR20-250AM5. Consult local sales representative for price.

[1]AC amps per phase at standard input voltage (per table on page 5.17).

DCRA Series
Dimensional Drawings

CASE I

For rack mounting; rear mounting support RP9 (see Optional Equipment page 5.18).

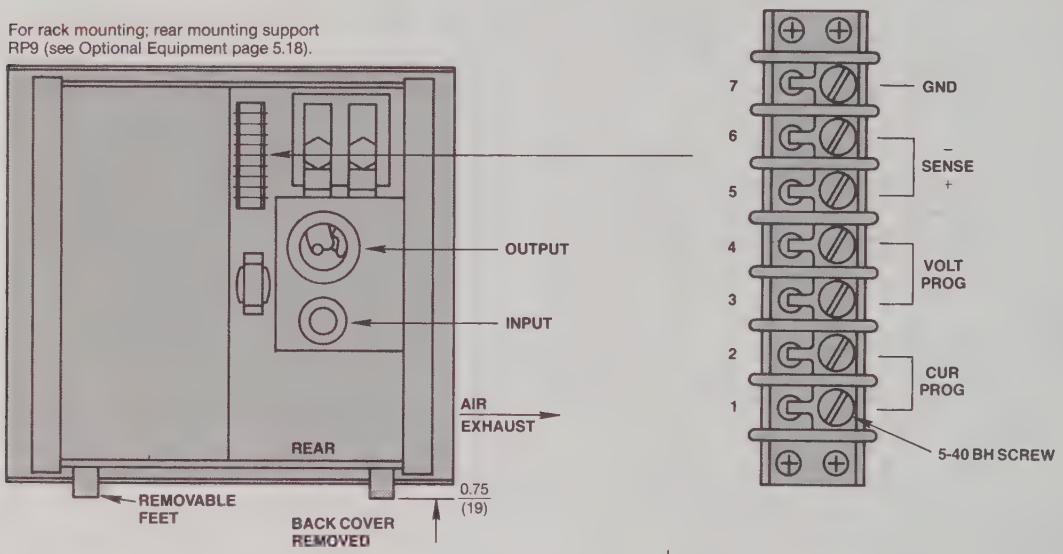

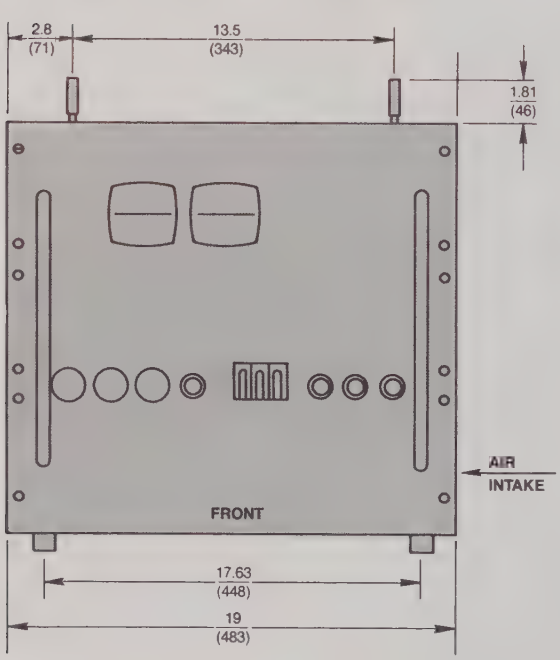

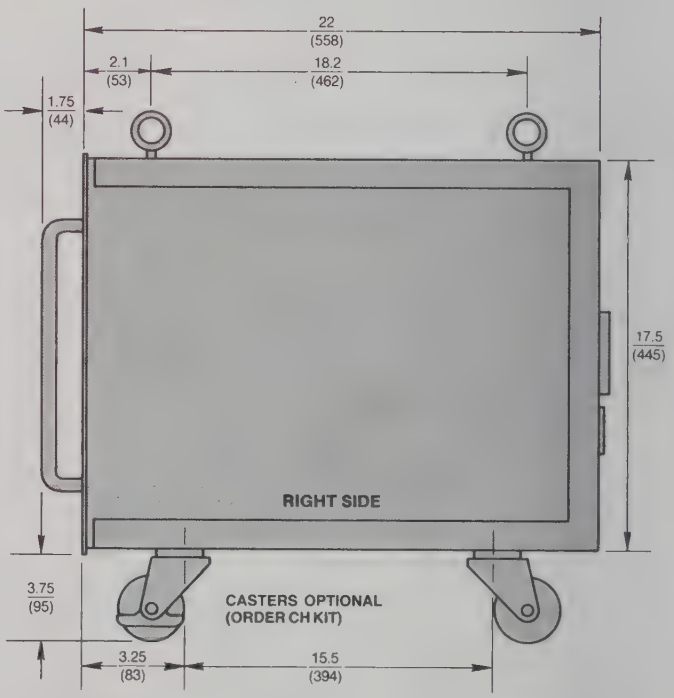

Input Terminals:	Model	Weight lb.	Weight kg.	Output Terminals
4 terminal barrier strip with 10-32BH Screws	**DCR 150-35A**	309	140	Jones' Barrier Terminal
	DCR 300-18A	318	144	Blocks/10-32BH Screws
Cabinet side enclosures optional for all models (order CSE kit)	**DCR 20-250A**	309	140	Penn Union #ZE34
	DCR 40-125A	315	143	post lug terminals for 1/0 to 350 MCM

Note: All dimensions are in inches (mm)

SORENSEN RAYTHEON Sorensen Company, 676 Island Pond Road, Manchester, NH 03103 USA (603) 668-4500 TWX 710-220-1339

CASE II

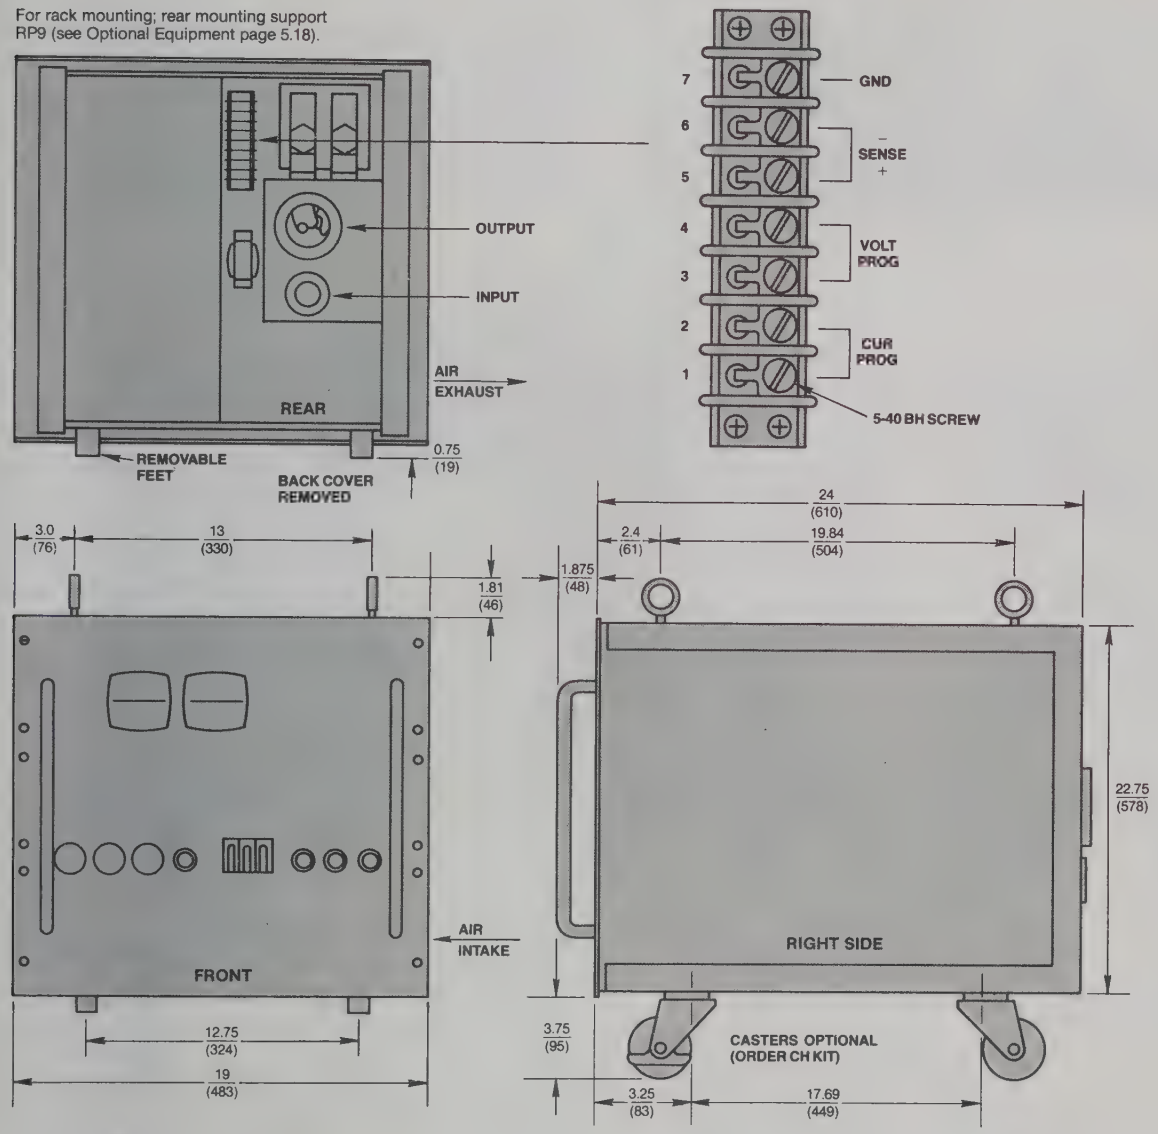

Input Terminals:	Model	Weight lb.	Weight kg.	Output Terminals
4 terminal barrier strip with 12-32BH Screws	**DCR 300-35A**	481	218	Jones' Barrier Terminal
	DCR 600-18A	481	218	Blocks/10-32BH Screws
	DCR 20-500A	481	218	Penn Union #Hex 21915 post lug terminals for 700MCM to 1000 MCM
	DCR 40-250A	481	218	Penn Union #ZE34 post lug terminals for 1/0 to 350 MCM
Cabinet side enclosures optional for all models (order CSE kit)	**DCR 150-70A**	481	218	Penn Union #ZE15 post lug terminals for #4 strd. to #1 strd.

Note: All dimensions are in inches (mm)

DCRA Series
Dimensional Drawings

CASE III

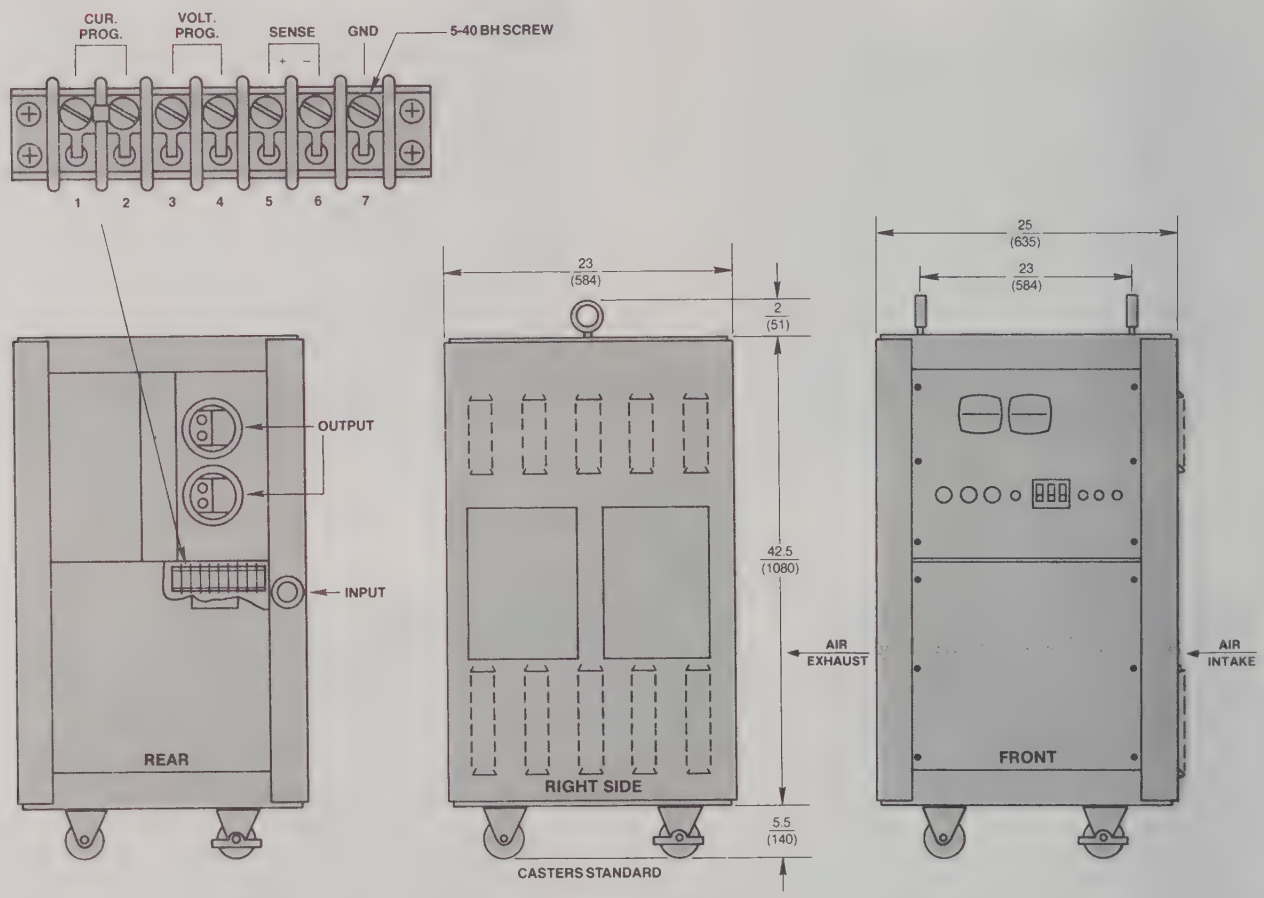

Input Terminals:	Model	Weight lb.	Weight kg.	Output Terminals
4 terminals barrier strip (DCR 40-500A - 12-32BH Screws, DCR 20-1000A - ¼-28BH Screws)	**DCR 20-1000A**	803	364	Penn Union #VL2-21925 post lug terminals. Each lug 700 MCM to 1000 MCM (2 wires)
	DCR 40-500A	803	364	Penn Union #Hex-21915 post lug terminals for 700 MCM to 1000 MCM

Note: All dimensions are in inches
(mm)

DCRA Series
Dimensional Drawings

ST 101 CHASSIS

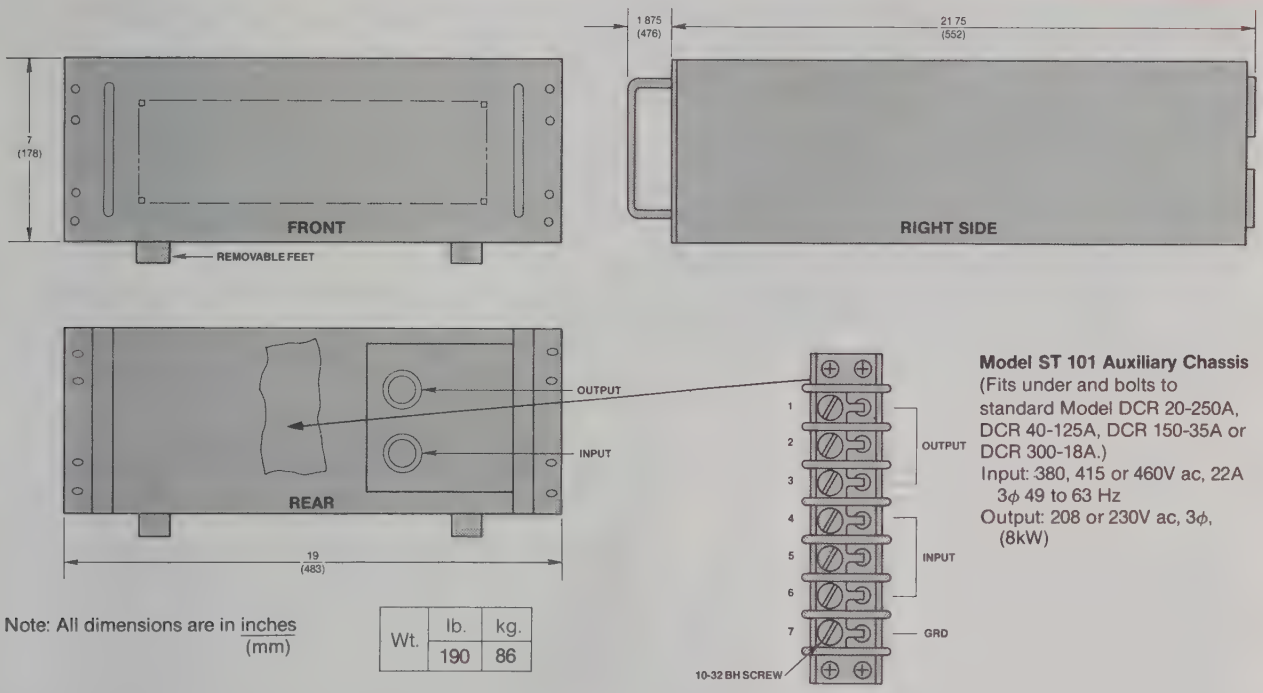

Model ST 101 Auxiliary Chassis
(Fits under and bolts to standard Model DCR 20-250A, DCR 40-125A, DCR 150-35A or DCR 300-18A.)
Input: 380, 415 or 460V ac, 22A 3ϕ 49 to 63 Hz
Output: 208 or 230V ac, 3ϕ, (8kW)

Note: All dimensions are in inches (mm)

Wt.	lb.	kg.
	190	86

Factory Input Voltage Modifications

Model	187-229V	207-253V	342-418V (Volts, Three Phase)	390-440V	414-506V
0-20V					
DCR 20-250A	Standard	M3	N/A[6]	N/A[6]	N/A[6]
DCR 20-500A	M1	M3	M6[3]	M8	Standard
DCR 20-1000A	N/A	N/A	M6[4]	M8[5]	Standard
0-40V					
DCR 40-125A	Standard	M3	N/A[6]	N/A[6]	N/A[6]
DCR 40-250A	M1	M3	M6[3]	M8	Standard
DCR 40-500A	N/A	N/A	M6[4]	M8[5]	Standard
0-150V					
DCR 150-35A	Standard	M3	N/A[6]	N/A[6]	N/A[6]
DCR 150-70A	M1	M3	M6[3]	M8	Standard
0-300V					
DCR 300-18A	Standard	M3	N/A[6]	N/A[6]	N/A[6]
DCR 300-35A	M1	M3	M6[3]	M8	Standard
0-600V					
DCR 600-18A	M1	M3	M6[3]	M8	Standard

[3]Derate output voltage range by 10%. [4]Derate output voltage range by 25%. [5]Derate output voltage range by 7%.
[6]*Modification* not available. Specify *optional* step down transformer (see accessories) ST101.
Note: To specify, add modification suffix to model number. Example: DCR 40-250A M8. Consult local sales representative for pricing data.

Field Input Voltage Modifications

Alternatively where applicable customer may perform field modification without voiding warranty. (See instruction manual for simple transformer tap changes.)

DCRA Series
Optional Equipment

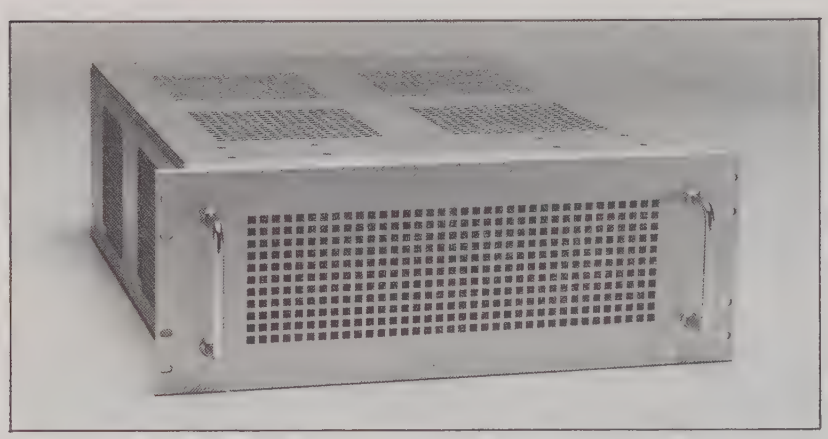

DCRA auxiliary three phase, stepdown input transformer. (380/415/460V ac to 208/230V ac @ 8kW). ST 101 (see drawing on page 5.17).

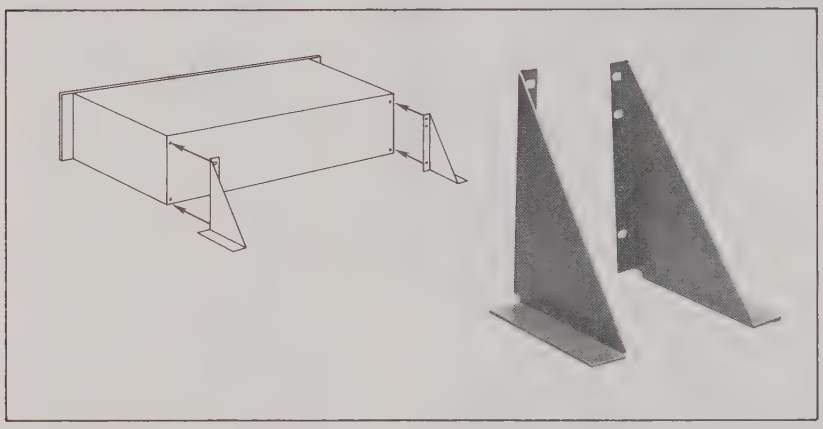

DCRA Rear Mounting Support.
Kit RP9 (For Rack Mounting)

(Below)
CABINET SIDE ENCLOSURE (CSE). For self-contained use the CSE protects personnel from sharp edges and the unit from side damage. The CSE Kit consists of two heavy duty enameled metal enclosures and the necessary hardware

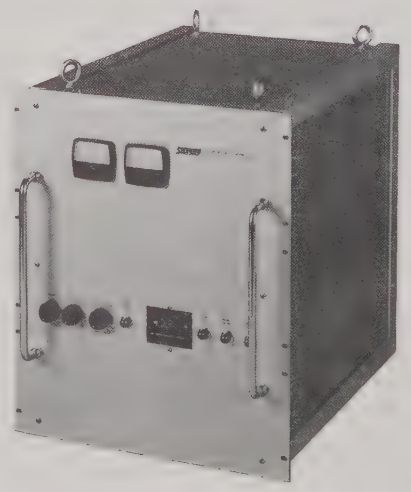

DCRA before CSE installation.

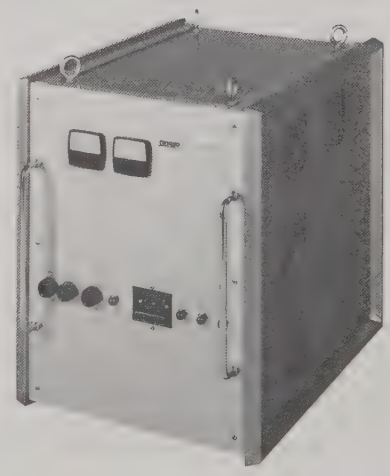

DCRA with CSE Kit, installed.



SORENSEN
RAYTHEON
Sorensen Company, 676 Island Pond Road, Manchester, NH 03103 USA (603) 668-4500 TWX 710-220-1339

SORENSEN

Bench, Lab, Test and System High Speed Programmable Power Supplies QRD Series

- 7 models in five voltage ranges from 0-15V dc to 0-60V dc with current levels from 0.75A to 4A
- 115V ac single phase input standard; 220/230V ac optional
- Standard and high speed programming modes
- 50/440 Hz operation without derating
- High speed programming by voltage or resistance in voltage or current modes
- Voltage regulation to ± 0.005%
- Excellent voltage or current regulation with automatic crossover
- Adjustable Current Limiting with automatic recovery
- Coarse and fine voltage and current output controls standard.
- No overshoot at turn-on, turn-off or power failure
- 5 year warranty

The QRD series incorporates a linear pass design which provides high performance and high speed programming features.

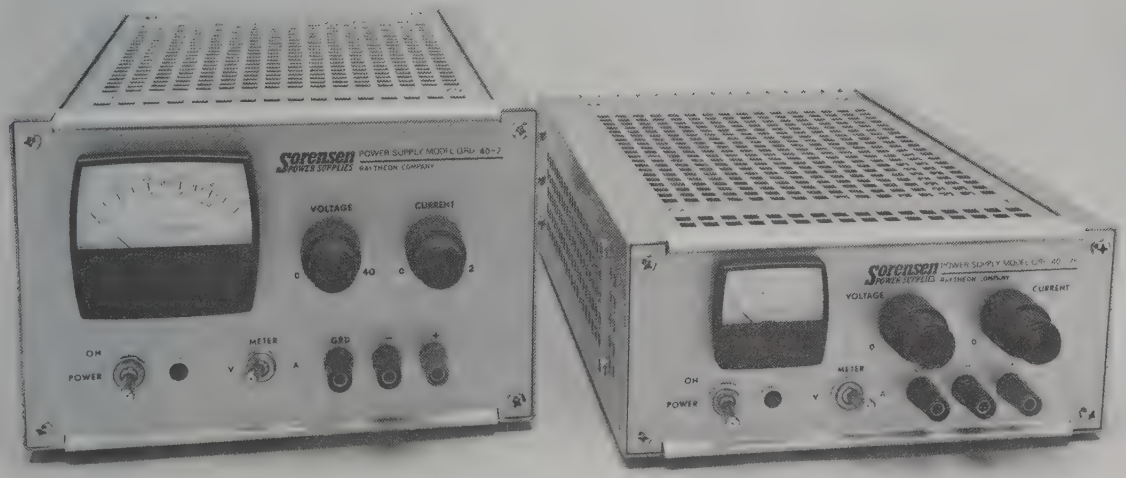

5 Year Warranty

QRD Series
Model Specifications

DC OUTPUT
CONSTANT VOLTAGE MODE

Voltage Regulation:
Line and load combined 0.01% or 1.5mV, whichever is greater.

Temperature Coefficient:
±0.015% + 200μV/°C.

Resistance Programming:
100 ohms per volt.

Voltage Programming:
1 volt/volt, 10mA drive.

Stability:
0.025% +1mV for 8 hours after 30 minute warm-up.

Remote Sensing:
1V maximum drop per load lead.

Transient Response:
50μs (70μs in high speed mode) to return to a bandwidth of ±10mV for a 0-100% or 100-0% step load change (typical).

CONSTANT CURRENT MODE

Current Regulation:
.02% + 500μA

Temperature Coefficient:
0.015% + 100μA/°C.

Current Programming:
Current programmable. See specification chart.

Stability:
0.1% + 0.5 mA for 8 hours after 30 minute warm-up.

HIGH SPEED PROGRAMMING MODE

Programming time (typical):
0-100% ΔE = 25μs
100-0% ΔE = 10μs
0-100% ΔI = 80μs
100-0% ΔI = 200μs

Ripple:
High speed specifications are twice those listed in model specs.

Maximum Capacitive Load:
0.02μF.

AC INPUT

Voltage:
105-125V ac single phase standard.

Voltage Options:
200-240V ac 210-250V ac selectable.

Frequency:
47-440Hz operation.

OPERATING DATA

Ambient Operating Temperature Range:
0 to + 70°C

Storage Temperature Range:
–40°C to +85°C.

Resolution:
0.01% of E_o max. and 0.015% of I_o max. with standard controls.

Series Operation:
200V dc maximum.

Parallel Operation:
Master-slave up to three units maximum. Straight paralleling any number.

Overshoot:
No overshoot at turn-on, turn-off or power failure.

Overload/Short Circuit Protection:
Adjustable Automatic Current Limiting (ACL) with automatic recovery.

QRD ACCESSORIES

Overvoltage protection, front panel handles, rack adapters, IEEE-488 digital programmer.

Model	Output Current A dc 40°C	55°C	70°C	Ripple Constant Voltage (μV rms)	Constant Current (μA)	Remote Current Programming Ohms/A	Volts/A	AC Input Current (at 115V)	Case	OVP*
0-15V										
QRD 15-2	2.2	2.0	1.2	200	150	500	0.5	0.95A	I	VP1
0-20V										
QRD 20-4	4.4	4.0	2.4	200	400	250	0.25	2.3A	II	VP1
0-30V										
QRD 30-1	1.1	1.0	0.6	200	150	1000	1.0	0.95A	I	VP1
0-40V										
QRD 40-.75	0.83	0.75	0.45	200	150	1300	1.3	0.95A	I	VP1
QRD 40-2	2.2	2.0	1.2	200	300	500	0.5	2.3A	II	VP1
0-60V										
QRD 60-.5	0.55	0.5	0.3	200	150	2000	2.0	0.95A	I	VP3
QRD 60-1.5	1.65	1.5	0.9	200	300	670	0.67	2.3A	II	VP3

*For specifications see page 5.24 For rack mounting information see page 5.22.

CASE I & II

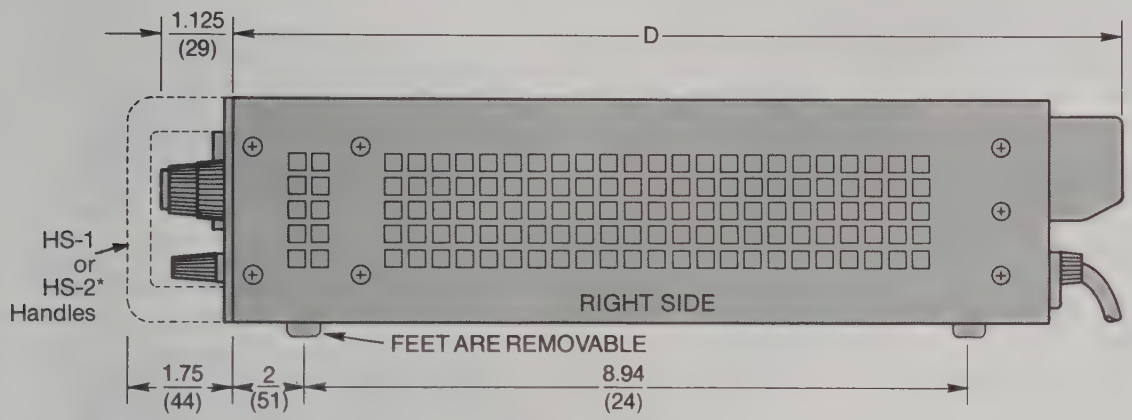

*HANDLES (ACCESSORY ITEM) See page 5.22.

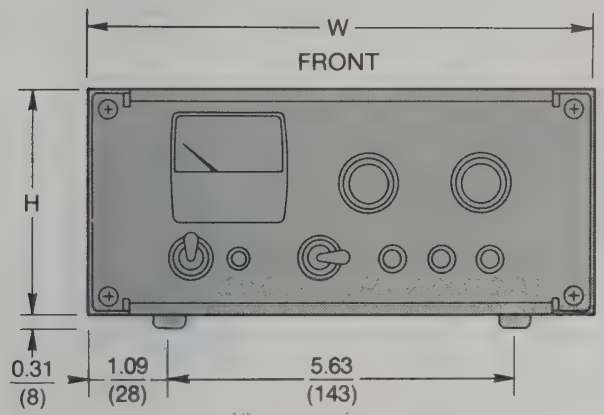

Case	W Width	H Height	D Depth	Weight lb.	Weight kg.
I	8.18 (208)	3.46 (83)	12.75 (324)	12.5	5.7
II	8.19 (208)	5.22 (133)	13 (330)	19.5	8.8

Note: All dimensions are in inches (mm)

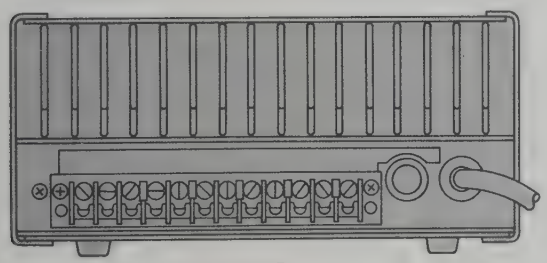

REAR

QRD Series
Rack Mounting Accessories and Optional Equipment

Accessories

Single and dual 19" adapters permit rack mounting a single QRD, or two units side by side. (includes chromed handles)

	Accessory No.
Single Mounting for 3½" high units	RP12
Single Mounting for 5¼" high units	RP13
Dual Mount for 3½" high units	RP14
Dual Mount for 5¼" high units	RP15

Handle sets for use with QRD Series Power Supplies

3½" high units	HS-1
5¼" high units	HS-2

2 channel digital-to-analog programmer, IEEE-488 interface to GPIB bus ..... 488 DAP

RP13

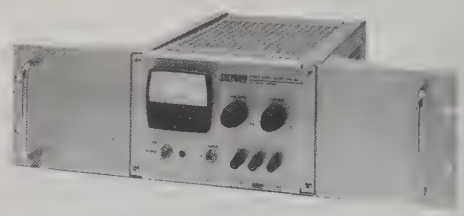

RP15

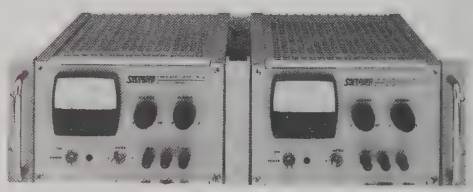

Options

Ten turn current control installed in place of standard coarse and fine control. Resolution ≅ .025%

	Option No.
Linearity ± .25%	CC-1
Calibrated dial for 10 turn current control	D-1

Ten turn voltage control installed in place of standard coarse and fine control. Resolution ≅ .015%

Linearity ± .25% ..... See chart below

Calibrated dial for 10 turn voltage control D-2

HS-1

488-DAP

Model	QRD15-2	QRD20-4	QRD30-1	QRD40-.75	QRD40-2	QRD60-.5	QRD60-1.5
10 turn voltage control option #	VC -2	VC-3	VC-4	VC-5	VC-5	VC-6	VC-6

Note: When ordering option, specify after model no.
Example: QRD15-2 VC-2 D-2.

SORENSEN RAYTHEON Sorensen Company, 676 Island Pond Road, Manchester, NH 03103 USA (603) 668-4500 TWX 710-220-1339

SORENSEN

Dual Output Laboratory & Industrial High Speed Programmable Linear Power Supplies QRL Series

- 120V ac single phase input standard 210/240V ac by internal taps.
- Standard and high speed programming modes
- Front panel OVP adjustment and built-in crowbar
- Linear circuit for very low ripple and noise
- Designed to meet VDE EMI requirements (no switching elements)
- Digital meters monitor both outputs. Switch selects volts or amps
- Precision 10-turn panel pots for both volts and current adjustment standard
- Master-slave series or parallel operation
- Open sense lead protection
- Output current monitor for remote indication
- Reverse voltage protection on output
- Designed to meet UL and CSA safety specifications
- 5 year warranty

The QRL series is designed for high performance applications and wherever programmability and fast response is necessary.

Specifications

STANDARD PROGRAMMING MODE DC OUTPUT CONSTANT VOLTAGE MODE

Voltage and Current Outputs:
See Table I

Voltage Regulation:
.005% E_O max. (line and load combined).

Ripple:
See Table I.

Temperature Coefficient:
.005% E_O max./°C (typical)

Resistance Programming:
0 to 10K ohms will program 0 to rated E_O max.

Voltage Programming:
0-10V signal source will program 0 -E_O max.

QRL Series
Specifications

Stability:
.01% E_O max. (typical) for 8 hours after 1/2 hour warm-up.

Remote Sensing:
IV max. drop per load level.

Transient Response Time:
After a step load change from 10 to 90% of full load the output voltage shall recover to 20mV max. within 50μs.

Programming Time:
Definition: The time required for output to change from 0 to 90% of full rated voltage in response to the input programming change from 0-10V @ 10V/μs slew rate using 80% I_O max. load.

CONSTANT CURRENT MODE

Current Regulation:
.02% I_O max. (line and load combined).

Ripple:
see Table I.

Temperature Coefficient:
.01% I_O max/°C (typical).

Resistance Programming:
0 to 10 K ohms will program 0 to rated I^O max.

Current Programming:
0 to 10V signal source will program 0 to rated I_O max.

Remote Current Monitor:
0-10V Output signal corresponds to 0 to full rated output curent.

Stability:
.02% I_O max. (typical) for 8 hours after 1/2 hour warm-up.

AC INPUT

Voltage:
105-132V ac single phase standard.

Voltage Options:
184-231V ac or 210-264V ac selectable by internal taps. See Note 1 and 2 for factory wired options.

Frequency:
47-63 Hz.

AC Input Current:
1.5A @ 120V ac, 0.75A @ 210/240V ac.

OPERATING DATA

Ambient Operating Temperature Range:
0°-70°C. Derate above 40°C. See Table.

Storage Temperature Range:
–55°C to 85°C.

Resolution:
Constant voltage mode .02% E_O max. Constant current mode .02% I_O max.

Series Operation:
Master-slave offering two times the voltage.

Parallel Operation:
Master-slave offering two times the current.

Overshoot:
On/off 1% E_O max. or 1% I_O max.

Overvoltage Protection:
Adjustable from 3.0V dc to 125% E_O max. (minimum range). SCR fires after approximately 25 μs delay. Reset by interrupting AC line.

HIGH SPEED PROGRAMMING MODE

Except for the following all specifications are the same as the standard mode.

Programming Time:
See Table 2.

Ripple:
See Table 2.

Transient Response:
10μs to recover to 1% regulation band.

Maximum Capacitive Load:
Shall be less than .001μ F.

QRL ACCESSORY

Connector Kit CCK-1 kit consists of 2 control connectors #1058159-1, 1058164-1 and 18 pins for above.

Note: A kit is included with each unit shipped.

The CCK-1 Kit should be considered a spare.

Table 1: STANDARD PROGRAMMING

Output Voltage Model	Output Current 40°C	50°C	70°C	Ripple (Pard) RMS (10Hz-20MHz) Voltage Mode	RMS (10Hz-20MHz) Current Mode	pk-pk (10Hz-50MHz) Voltage Mode	pk-pk (10Hz-50MHz) Current Mode	Programming Speed (typical) Voltage Mode	Programming Speed (typical) Current Mode	Digital Meter Accuracy (% of reading plus one LSD) Voltage	Digital Meter Accuracy (% of reading plus one LSD) Current	Meter Resolution V	Meter Resolution A	Meter Readout (max) Amps	Meter Readout (max) Volts
0-7.5V															
QRL 7.5-3D	3.0	2.25	1.5	200μV	200μA	1.0mV	1.0mA	30ms	N/A	±0.5%	±2%	10mV	10mA	3.00	7.50
0-20V															
QRL 20-1.5D	1.5	1.12	0.75	200μV	200μA	1.0mV	1.0mA	30ms	N/A	±0.5%	±2%	10mV	10mA	1.50	19.99

Note: (1) For 210V ac add M1 to model number. Example: QRL 7.5-3DMI (2) For 240V ac add M2 to model number.

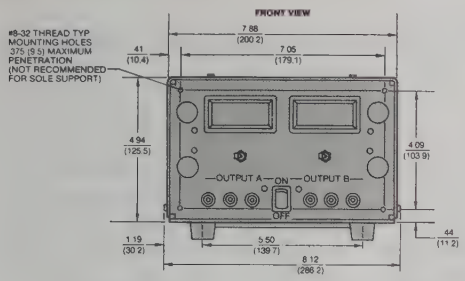

QRL Accessory Connector Kit CCK-1 consists of:
2 control connectors 1058159-1
18 pins for above 1058164-1
Note: A kit is included with each unit shipped. The CCK-1 should be considered for a spare.

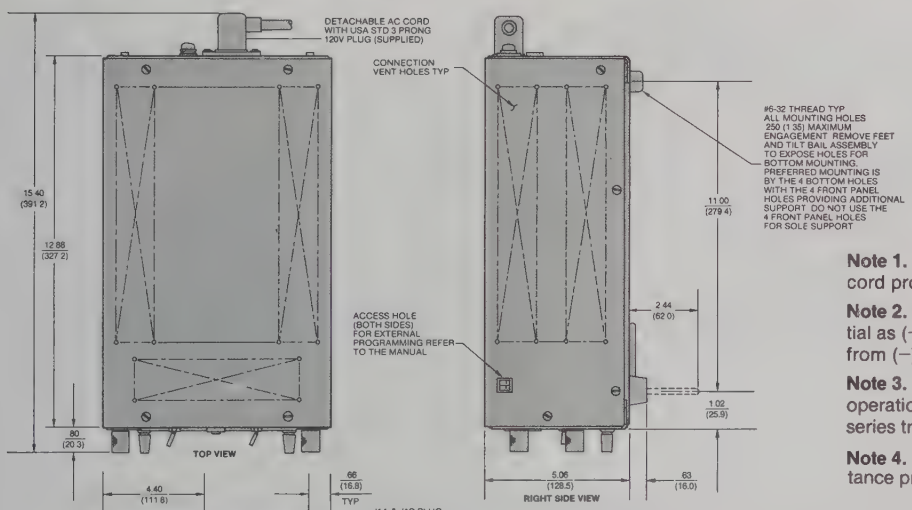
DETACHABLE AC CORD WITH USA STD 3 PRONG 120V PLUG (SUPPLIED)
CONNECTION VENT HOLES TYP
#6-32 THREAD TYP ALL MOUNTING HOLES 250 (1.35) MAXIMUM ENGAGEMENT. REMOVE FEET AND TILT BAIL ASSEMBLY TO EXPOSE HOLES FOR BOTTOM MOUNTING. PREFERRED MOUNTING IS BY THE 4 BOTTOM HOLES WITH THE 4 FRONT PANEL HOLES PROVIDING ADDITIONAL SUPPORT. DO NOT USE THE 4 FRONT PANEL HOLES FOR SOLE SUPPORT
15.40 (391.2)
12.88 (327.2)
11.00 (279.4)
2.44 (62.0)
1.02 (25.9)
.80 (20.3)
ACCESS HOLE (BOTH SIDES) FOR EXTERNAL PROGRAMMING REFER TO THE MANUAL
TOP VIEW
RIGHT SIDE VIEW
5.06 (128.5)
.63 (16.0)
4.40 (111.8)
.66 (16.8) TYP
FUSE
J1B
J1A
J5
J1A & J1B PLUG 9 POSITION CONNECTOR AMP PART NO. 205204-1 RAYTHEON PART NO. 1058159-1
CONTACT AMP PART NO. 1-66506-0 RAYTHEON PART NO. 1058164-1
MATING CONNECTOR
OUTPUT B
OUTPUT A
4.15 (105.4)
3.47 (88.1)
TB1B
TB1A
.70 (17.8)
1.63 (41.4)
TB1A & TB1B WELDMULLER PART NO. 4890.6 ACCEPTS WIRE SIZE #22 TO #16 PRESSURE-TYPE TERMINAL BOARD
REAR VIEW

Wt	lb	kg
	15	33.0

Note 1. A removable plug-in line cord provided with unit.

Note 2. Return is at same potential as (−) sense, but is isolated from (−) sense load.

Note 3. For use in master-slave operation of both outputs in series tracking.

Note 4. For use in external resistance program of volts or curr.

Output Control Pin Assignment:
9 pin receptacle connector
AMP P/N 745102-1.
Pin 1. Current Programming
Pin 2. Volt Programming
Pin 3. Return (zero volt) Note 2
Pin 4. + 10V ref.
Pin 5. Tracking in 01 (Note 3)
Pin 6. 1mA source A (Note 4)
Pin 7. 1mA source B (Note 4)
Pin 8. Current Monitor
Pin 9. Tracking in #2 (Note 3)

Table 2: HIGH SPEED PROGRAMMING

Output Voltage Model	Ripple (Pard) RMS (10Hz-20MHz) Voltage Mode	RMS (10Hz-20MHz) Current Mode	pk-pk (10Hz-50MHz) Voltage Mode	pk-pk (10Hz-50MHz) Current Mode	Programming Speed (typical) Voltage Mode	Programming Speed (typical) Current Mode	Digital Meter Accuracy (% of reading plus one LSD) Voltage	Digital Meter Accuracy (% of reading plus one LSD) Current	Meter Resolution V	Meter Resolution A	Meter Readout (max) Amps	Meter Readout Max) Volts
0-7.5V												
QRL 7.5-3D	500μV	500μA	1.5mV	1.5mA	5μs	30μs	±0.5%	±2%	10mV	10mA	3.00	7.50
0-20V												
QRL 20-1.5D	500μV	500μA	1.5mV	1.5mA	5μs	30μs	±0.5%	±2%	10mV	10mA	1.50	19.99

Note: All dimensions are in inches (mm)

RA500 Series
Power Assemblies

The Rack Size for the RA500 Series is 5.25" x 19" x 22". A system comes completely assembled, wired, tested and ready to use in your application.

QRL Series configuration combinations

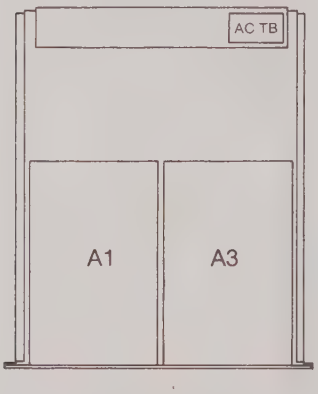

Sorensen Rack Number	Consists of	Location	Front Panel
SR 172231	1 ea. QRL 7.5-3D	A1	PA 503
SR 172232	2 ea. QRL 7.5-3D	A1, A3	PA 502
SR 172233	1 ea. QRL 20-1.5D	A1	PA 503
SR 172234	2 ea. QRL 20-1.5D	A1, A3	PA 502
SR 172235	1 ea. QRL 7.5-3D 1 ea. QRL 20-1.5D	A1, A3	PA 502

QRL and 488 DAP Series configuration combinations

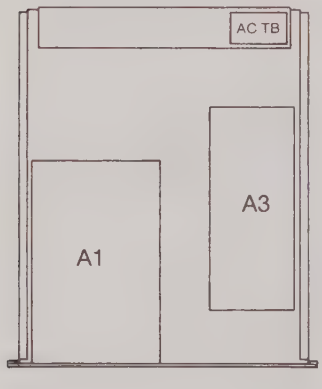

Sorensen Rack Number	Consists of	Location	Front Panel
SR 172236	1 ea. QRL 7.5-3D 1 ea. 488 DAP	A1, A3	PA 503
SR 172237	1 ea. QRL 20-1.5D 1 ea. 488 DAP	A1, A3	PA 503

Note: See 488 DAP Series for up to three unit rack configuration and description of PA 501 front panel (For 488 DAP only).

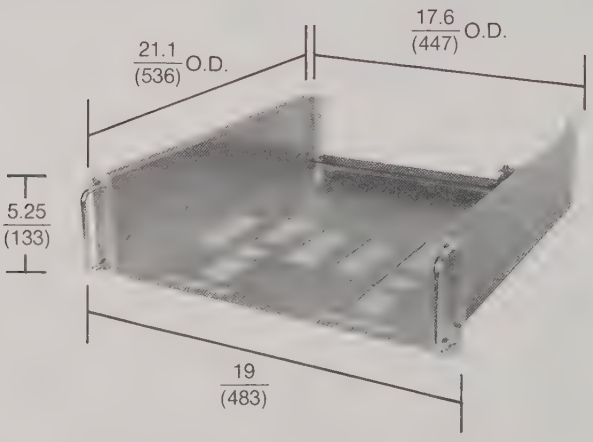

Note: All dimensions are in inches (mm)

PA 502 is an adapter panel with dual cutout for use with 2 QRL models.

PA 503 is an adapter panel with a single cutout for use with one QRL and one 488 DAP.

SORENSEN RAYTHEON Sorensen Company, 676 Island Pond Road, Manchester, NH 03103 USA (603) 668-4500 TWX 710-220-1339

SORENSEN

Overvoltage Protectors for QSA and QRD Series

OVP Models

- 4 models available to match each Sorensen power supply or instrument in the QSA and QRD Series.
- Fast response SCR crowbar action (10μs typical)
- Wide range trip voltage adjustment
- Output voltages reduce to 2.5V or less when tripped
- Temperature coefficient 0.5% of preset trip voltage/°C
- 5 year warranty

5 Year Warranty

OVP Models
Overvoltage Protectors for QSA and QRD Series

OVP Series Specifications

Power Supply	OVP Model
QSA 10-1.4	VP1
QSA 10-3.7	VP1
QSA 18-1.1	VP1
QSA 18-1.9	VP1
QSA 18-3.0	VP1
QSA 48-0.4	VP3
QSA 48-0.8	VP3
QSA 48-1.2	VP3
QSA 75-0.5	VP3
QSA 120-0.5	VP8
QSA 175-0.25	VP23
QSA 265-0.15	VP23
QRD 15-2	VP1
QRD 20-4	VP1
QRD 30-1	VP1
QRD 40-0.75	VP1
QRD 40-2	VP1
QRD 60-0.5	VP3
QRD 60-1.5	VP3

Model	VP1	VP3	VP8	VP23
Applied Voltage V dc (screwdriver trip adjustment)	3.5-50	3.5-100	3.5-150	140-350
Loading (mA)	10	10	10	25
Max Crowbar (tripped current)	4.4A	4.4A	4.4A	0.3A

Model VP1, VP3 & VP8

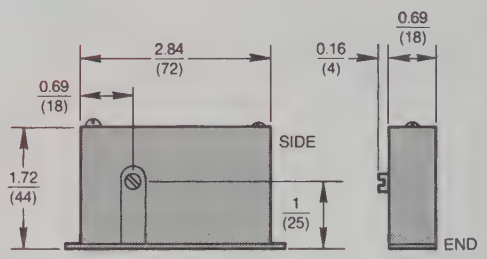

Model VP23

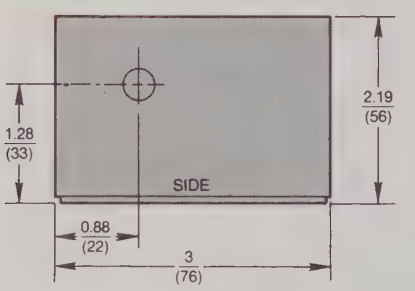

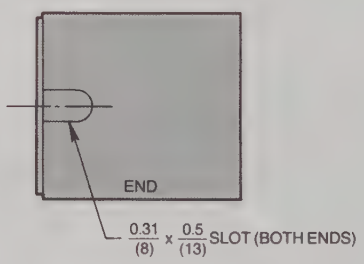

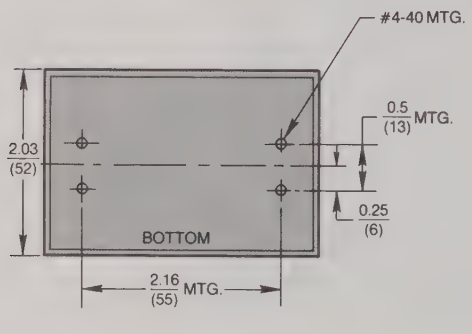

Note: All dimensions are in $\frac{\text{inches}}{\text{mm}}$

SORENSEN
RAYTHEON
Sorensen Company, 676 Island Pond Road, Manchester, NH 03103 USA (603) 668-4500 TWX 710-220-1339

SORENSEN

Solid State
AC Line Voltage Regulators
ACR Series

- 8 models, 95-130V ac single phase operation with power levels 0.5kVA to 15kVA
- High efficiency 84-95% depending on model
- Fast response time
- 50/60 Hz operation without derating
- Insensitive to line frequency deviations
- Adjustable output voltage
- Remote programming
- Remote sensing
- Electronic Current Limiting permits operation with tungsten lamp or small motor loads
- Three phase operation by multi-unit configuration
- 5 year warranty

The ACR series features a single phase input SCR controlled regulator to provide high efficiency and precise AC power for critical power requirements.

5 Year Warranty

ACR Series
Specifications

OUTPUT

Output Voltage:
110-120V ac single phase, adjustable.

Regulation:
±0.1% line or load on models 0.5kVA to 3kVA for full load change or ±10% line voltage change.
±0.15% line or load for 5kVA and over.

Resolution:
0.05% of output voltage (E_O).

Power Factor:
Unity to zero lag. On 7.5kVA and larger models, input voltage range is reduced to 100-130V ac for power loads below 0.7 lagging.

Harmonic Distortion:
3% maximum measured at nominal 60 Hz or 50 Hz (introduced by regulator).

Response Time:
30ms (50ms for 0-7.5kVA and over)

Stability:
0.05% for 8 hours after 30 minute warm-up time.

Remote Sensing:
1.5V maximum drop per load line.

Current Limiting:
Factory set at 120% of rated current. Consult manual for details on heavy overloads and short-circuits.

Temperature Coefficient:
0.015% of E_O/°C, for models 0.5kVA to 3kVA.
0.03% of E_O/°C for 5kVA and over.

INPUT

Input Voltage Range:
95-130V ac single phase. Momentary input surges 91-142V ac single phase.

Frequency:
47-53 Hz or 57-63 Hz operation. Factory set for 57-63 Hz.

OPERATING DATA

Ambient Temperature Range:
0°C to +50°C.

Storage Temperature Range:
–40°C to + 85°C.

Efficiency:
84-95% depending on model.

Remote Programming:
10 ohms/volt.

Remote Sensing:
1.5V max. drop per load lead.

ACR ACCESSORIES

Rack mounting adapter:
19" (4826 mm), mounting adaptor for ACR 500. Add RP7 to model number and consult local sales representative for price.

Cabinet Style Side Enclosures:
For self-contained bench use. Kit available for 0-3kVA models and over. Add CSE to model number and consult local sales representative for price.

Model Specifications

Model	Output Power (kVA)	AC Input Current (Max)	Efficiency (Full VA) %	Case
ACR 500	0-0.5	7	84	I
ACR 1000	0-1	14	86	II
ACR 2000	0-2	26	88	III
ACR 3000	0-3	39	90	III
ACR 5000	0-5	63	92	III
ACR 7500	0-7.5	94	93	IV
ACR 10,000	0-10	123	94	IV
ACR 15,000	0-15	183	95	IV

RP7 (For use with ACR 500 only)

Specifications subject to change without notice.

CASE I

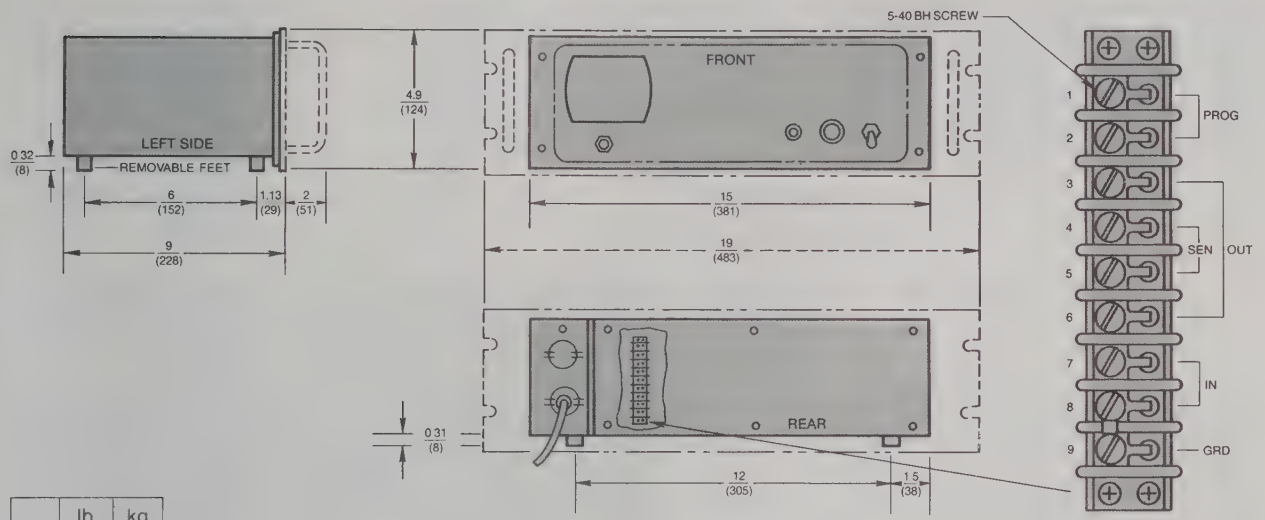

Wt.	lb.	kg.
	29	13

OPTIONAL 19 INCH RACK
ADAPTER IS AVAILABLE FOR THIS MODEL.
ORDER ADAPTER #RP7. (SEE DOTTED LINES ABOVE)

CASE II

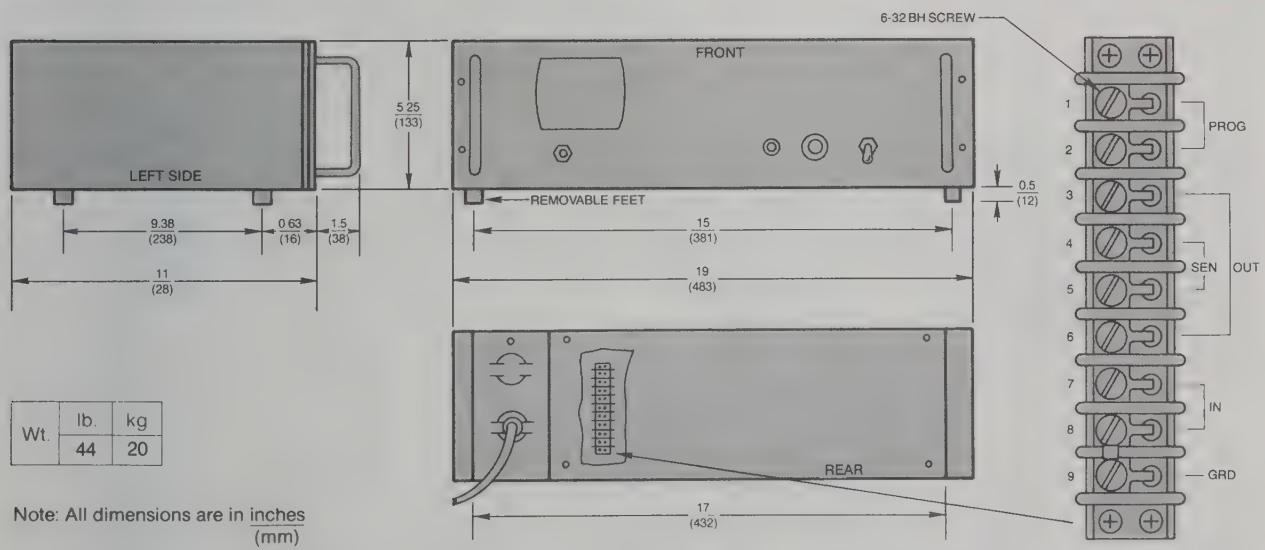

Wt.	lb.	kg
	44	20

Note: All dimensions are in inches (mm)

ACR Series
Dimensional Drawings

CASE III

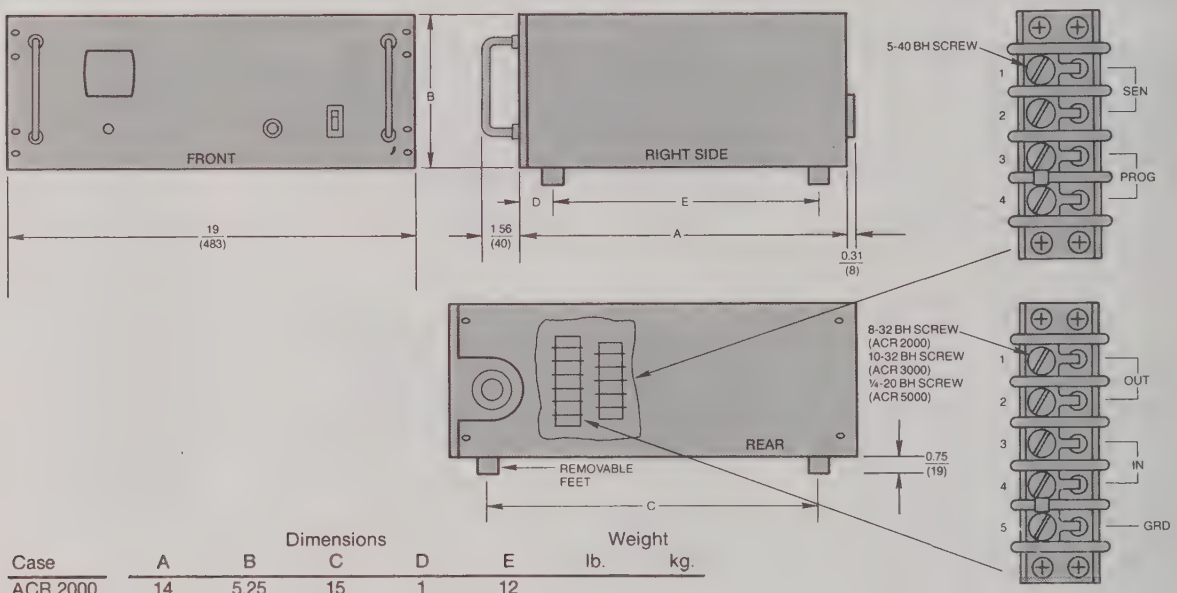

Case	Dimensions A	B	C	D	E	Weight lb.	kg.
ACR 2000	14 (356)	5.25 (133)	15 (361)	1 (25)	12 (305)	64	29
ACR 3000	15 (381)	7 (178)	14.25 (214)	2 (51)	14.25 (362)	84	38
ACR 5000	20 (508)	7 (178)	14.25 (214)	2 (51)	14.25 (362)	143	65

CASE IV

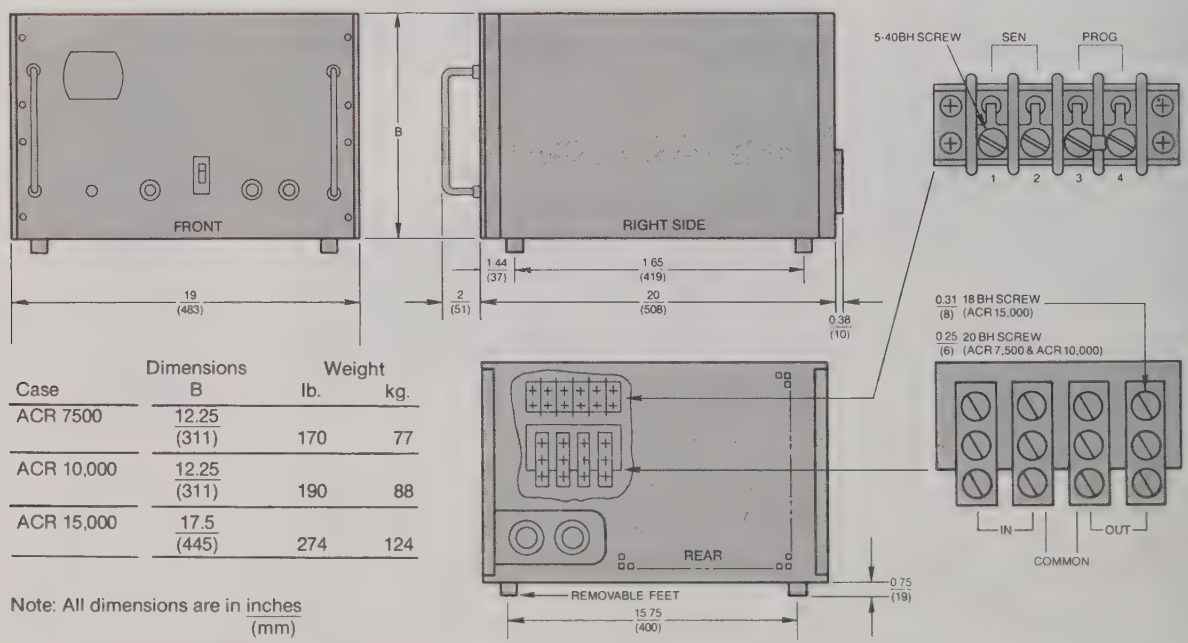

Case	Dimensions B	Weight lb.	kg.
ACR 7500	12.25 (311)	170	77
ACR 10,000	12.25 (311)	190	88
ACR 15,000	17.5 (445)	274	124

Note: All dimensions are in inches (mm)

SORENSEN
RAYTHEON
Sorensen Company, 676 Island Pond Road, Manchester, NH 03103 USA (603) 668-4500 TWX 710-220-1339

2 Channel
Digital-To-Analog Programmer
488 DAP Series

SORENSEN

- Interfaces to GPIB Bus (per IEEE - 488/1978 Standard)
- Two independent channels: each channel 0 to 10V or 0 to 1V
- 3 digit programming resolution.
- For use with all Sorensen programmable power supplies
- Flag circuit available to sense if power supply output is not as programmed
- Can be used with most GPIB controllers
- ASCII data format (BCD)
- ± 0.5 LSD basic digital-to-analog conversion accuracy
- 5 year warranty

The primary application for the 488 DAP is in ATE. Other applications are process control, environmental testing and motor control.

5 Year Warranty

2 Channel 488 DAP Series
Specifications

AC INPUT

Voltage:
90-110V ac, 108-132V ac
198-242V ac, 216-264V ac
single phase selectable via voltage select card

Current:
0.5A @ 117V ac

Frequency:
49-440Hz

ANALOG OUTPUT

Voltage Ranges:
0-9.99V dc (in 10mV increments)
0-0.999V dc (in 1mV increments)
shipped as 9.99V. Internal link changes required for 0.999V.

Current:
15mA source
1.5mA sink

Pard:
(Combined ripple, noise and drift, dc to 1MHz)
< 2.0 mV rms

Temperature Coefficient:
< 100 PPM/°C

Accuracy:
9.99V range: ±15mV
0.999V range: ±1.5mV

Zero Offset:
±250mV max. (by insertion of internal link change, the positive offset may be increased to 5.2V. The maximum output remains 9.99V.)

Full Scale Adjust:
± 250mV max

Programming Time:
0.6ms min. (controller processing time must be added)

OPERATING DATA

Ambient Operating Temperature Range:
0 to + 70°C

Storage Temperature Range:
-55°C to +85°C.

Isolation:
The AC line, the digital input and both analog outputs are isolated from each other and the chassis to withstand a 1500V dc test.

Cooling:
Convection cooled

Finish:
Textured blue thermal paint.

DIGITAL INPUT

Digital Interface:
The GPIB input/output connections are made on the front panel of the unit and conform to IEEE Standard 488/1978.

Functions Implemented:
L, AH, PP

Digital Input/Output:
TTL level, source/sink capability per IEEE-488/1978. Inputs Schmitt trigger buffered, outputs open collector devices. (See Figure.)

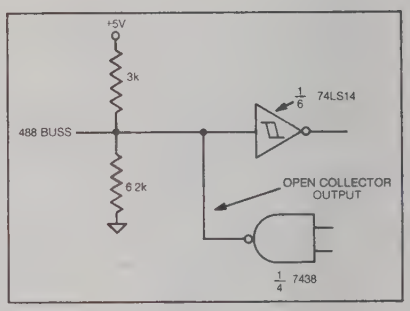

Data Format:
ASCII, 4 consecutive BCD data bytes: MSD, 2SD, LSD, 0/4. The last digit is used to set an auxiliary bit when required.

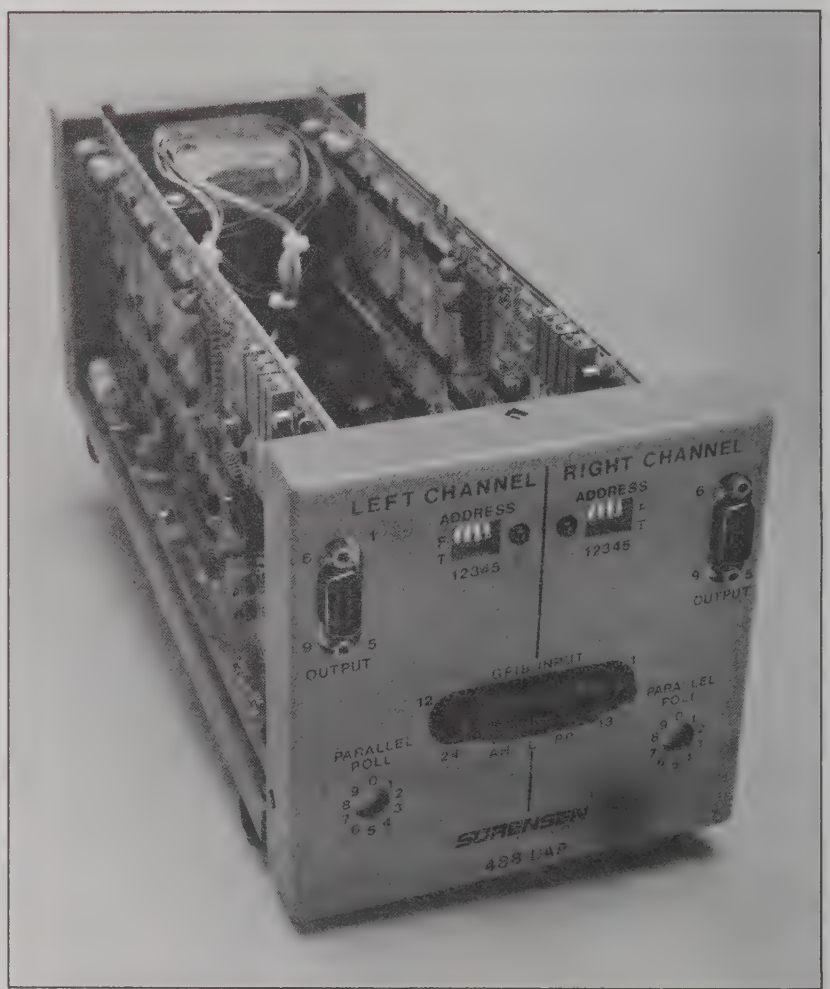

SORENSEN RAYTHEON Sorensen Company, 676 Island Pond Road, Manchester, NH 03103 USA (603) 668-4500 TWX 710-220-1339

2 Channel 488 DAP Series
Digital-To-Analog Programmer

Sorensen's 488 DAP is a two channel digital-to-analog (dc) converter designed to interface with the IEEE-488/1978 Standard data bus or General Purpose Interface Bus (GPIB). The 488 DAP functions (except for a limited Parallel-Poll capability) as a LISTENER on the bus (at any one or two legitimate addresses, switch selectable), with which it communicates via a 488 Standard connector. Data format is conventional ASCII, four BCD Bytes are required to load three significant figures of decimal voltage data for the digital-to-analog converter plus a bit for an auxiliary control line. Outputs of 0-9.99V dc or 0-0.999V dc are separately link selectable for each channel.

The digital inputs are Schmitt trigger buffered compatible with TTL levels. Source/sink capability is per IEEE-488/1978 Standard and the outputs are open collector devices.

Output is two flag bits (one per channel) available on bus lines D101-D108, (switch selectable) during Parallel-Poll. If used, this feature permits monitoring the conformity of the programmed supply's output with the digitally programmed value.

The 488 DAP functions on the GPIB with most GPIB-compatible devices and suitable Controllers such as Hewlett Packard 9825A Calculator, the Commodore PET Computer, and others. All Sorensen programmable power supplies can be controlled by the 488 DAP. Zero offset and scale factor adjustments are provided to trim the controlled supply's output.

Typical Power Supply Programming Time

Series	0-E max	E max - 0
QRL	5 to 15μs	5 to 15μs
QRD	20 to 30μs	10 to 20μs
SRL	16 to 100ms	5 to 50ms
DCR-B	150 to 300ms	500 to 2000ms

Based on 50% load.

The 488 DAP's outputs can be used directly (and independently) as programmed sources, no intervening programmable supply being necessary.

The primary application for the 488 DAP is in Automatic Test Equipment. Other uses for the 488 DAP are in process control, environmental testing, motor control, and similar applications.

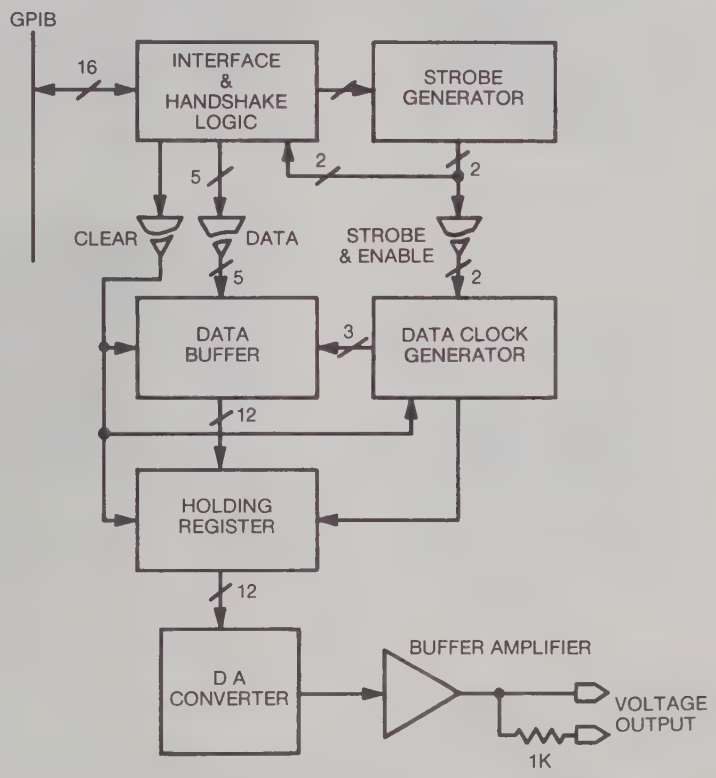

Simplified Block Diagram of 488 DAP (single channel shown)

Note: Auxiliary control bit functions and flat circuits not shown.

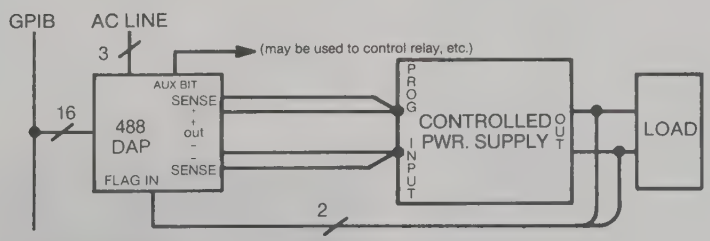

Typical application of 488 DAP used as Power Supply Programmer.

2 Channel 488 DAP Series
Dimensional Drawings

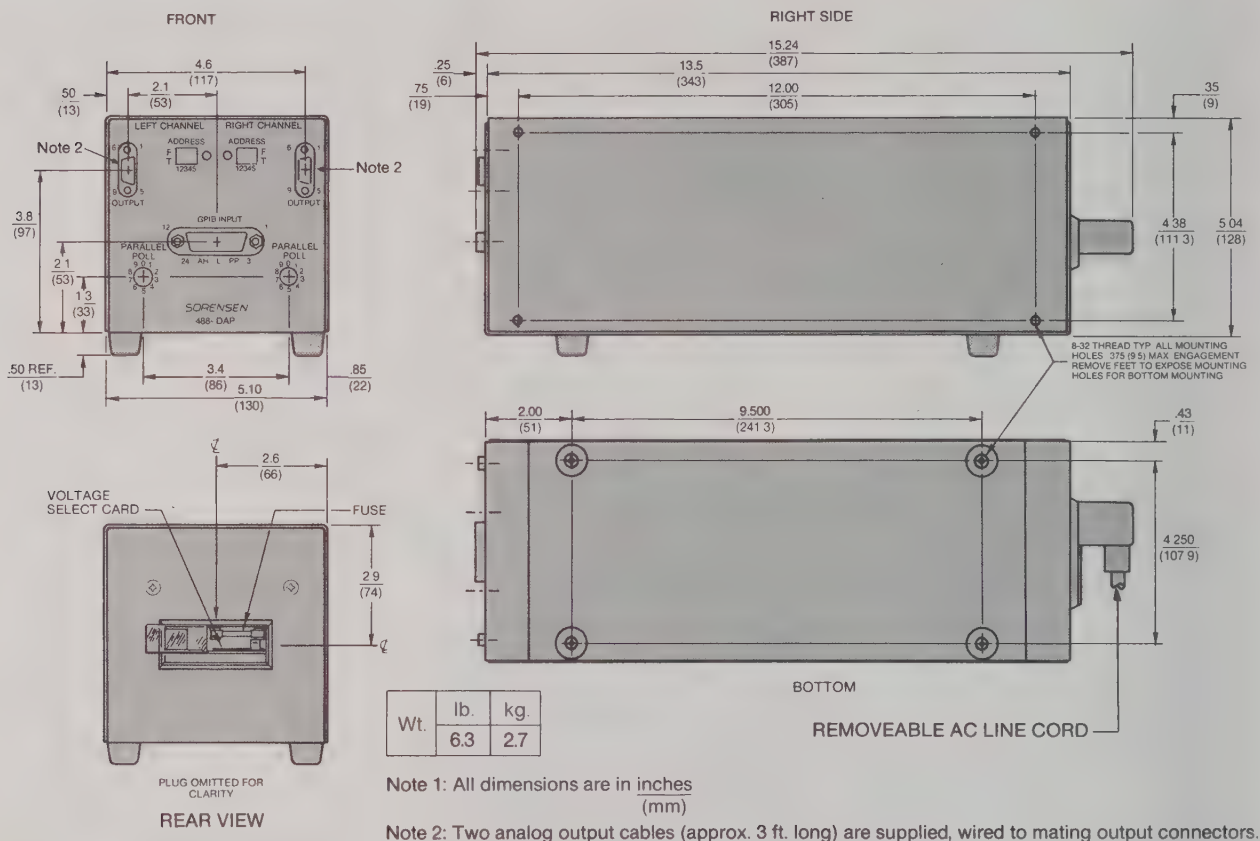

Wt.	lb.	kg.
	6.3	2.7

Note 1: All dimensions are in $\frac{\text{inches}}{(\text{mm})}$

Note 2: Two analog output cables (approx. 3 ft. long) are supplied, wired to mating output connectors.

RA500 Series
Power Assembly

See QRL section for 488 DAP, QRL combination options.
Rack size for the RA 500 series is 5.25" x 19" x 22". See QRL section for Rack details.
Each system comes completely assembled, wired, tested and ready for use in your application.

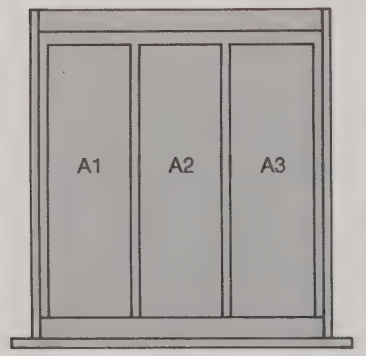

488 DAP Series Configuration
Maximum: 3 units

Sorensen Rack Number	Consists of	Location	Front Panel
SR 172117	1 ea. 488 DAP	A1	PA 501
SR 172143	2 ea. 488 DAP	A1, A3	PA 501
SR 172035	3 ea. 488 DAP	A1, A2, A3	PA 501

PA 501 is a full rack, blank filler panel for 488 DAP power assemblies.

Ordering Information

Domestic

Prices:
Consult current price list. The prices shown will be maintained for as long as possible, but please be advised that they are subject to change without notice.

We have a GSA contract Number: and GSA pricing is available to authorized customers. The pricing on the GSA list is usually not the same as the Domestic list, so contact Sorensen Sales Department for the appropriate model and cost.

Terms:
Net 30 days. FOB Manchester, New Hampshire.

Taxes:
The prices shown in the current Price List are standard. Add all applicable Federal, State and local taxes to the total price.

Quotations:
Inquiries are welcome concerning custom power supplies or minor modifications to our standard models. Furnish your local authorized Sorensen Sales Representative with complete specifications including quantity and desired delivery schedule.

Written quotations from Sorensen Company are valid for 30 days after date on quote form. Any other arrangement is only acceptable if in writing from an authorized Sorensen company official.

Source Inspection:
DD250 Forms are available. Ask Sorensen Sales Department for cost-per-destination charges, minimum cost for in-plant inspection and cost-per-shipment.

Shipment:
Normally all orders are shipped best available surface transportation. Air Freight or Air Express is available upon request.

Insurance is not provided unless requested and then it is invoiced as a separate item.

Delivery:
All models are considered standard stock based on the following schedule:

Modular P/S (Switching & Linear Series)	Power Instruments	Normal Delivery*
1-20 units	1-10 units	From stock or up to 60 days.
21-60 units	11-40 units	90 days
61+ units	41+ units	Consult factory.

*If prevailing conditions do not allow for immediate delivery on a specific model you will be notified promptly and given a shipping date.

Export Packing:
Heavy duty packing for Sea Freight shipment is available on request. Consult Sorensen Sales Department for information.

Testing:
Prior to being shipped from the factory, each Sorensen power supply is tested to assure that it performs within the specifications shown in our publications. All Sorensen power supplies are rated to accommodate normal component deviations.

Test Data:
Variables Test Data is available. Ask your Sorensen representative for details.

Repair Parts:
Sorensen maintains a full inventory of replacement parts for immediate shipment.

Customers may recalibrate, troubleshoot, or repair products as described in the instruction manual without voiding the warranty providing that professional instrument maintenance is performed, and such service is within the accepted norm and practices of the electronics industry. Sorensen Company will be the final arbiter of service problem disputes.

Warranty replacement parts are available to customers at no charge.

Limited Warranty
Sorensen Company warrants all parts of each power supply to be of sound design, good materials and workmanship, and will repair or exchange any parts proven to be defective under normal use at no charge for a period of five years from the date of shipment. Please note that MM, CM and SRM series carry a warranty period of two years.

Sorensen's liability under the terms of this warranty is limited to the satisfactory repair or the replacement of defective products which have not been damaged through accident, abuse, misuse, or unauthorized repair. Sorensen shall in no case be liable for any special or consequential damages of any nature.

The unused portion of this warranty is fully transferable from the original purchaser if the Sorensen product is a component of the original purchaser's product or system.

Defects will be corrected by the factory or one of our authorized field service centers throughout the world. All products returned for repair must be shipped freight prepaid and be accompanied by a Return Material Authorization. Returned freight is shipped collect.

Return Shipments:
All Sorensen products require a Return Material Authorization Number prior to shipment back to the factory. This is required for equipment ordered in error or returned for service. Contact the factory for details and return authorization. Equipment returned for service should include a description of the problem encountered and return shipping instructions. Equipment ordered incorrectly is subject to a restocking charge. Exact charges will be determined when the return authorization is issued. Power assemblies, modified standard power supplied, non-standard, obsolete, and custom built equipment may not be returned for credit.

Federal Manufacturer's Identification No. 49956

All sales are subject to Raytheon Standard Terms and Conditions of Sale.

International

Prices:
Consult your local Sorensen authorized sales representative or stocking distributor for details concerning current prices, terms, taxes and discounts.

Quotations:
Inquiries are welcome concerning custom power supplies or minor modifications to our standard models. Furnish your local authorized Sorensen Sales Representative with complete specifications including quantity and desired delivery schedule.

Written quotations from Sorensen Company are valid for 30 days from date on quote form. Any other arrangement is only acceptable if in writing from an official authorized by Sorensen. Consult your Sorensen sales representative for local policy.

Shipment:
All orders originating in the United States are shipped Air Parcel Post unless you specify Air Freight, Air Express or Sea Freight. Insurance is not provided unless specifically requested and then it will be invoiced as a separate item.

Delivery:
Ask your local Sorensen sales representative to consult current price list for delivery data on Sorensen stock and limited production models. In the event a specific stock model is not immediately available, you will be notified promptly and given current shipping information.

Packing:
Items originating in the United States will, upon request, be provided with heavy duty packing for Sea Freight shipment. Consult your local Sorensen sales representative or authorized distributor for details.

Testing:
Prior to shipment from the factory each Sorensen power supply is tested to assure that it performs within the specifications printed in our publications. All Sorensen power supplies are rated to accommodate normal component deviations.

Test Data:
Variables Test Data can be made available. Ask your Sorensen representative for details.

Repair Parts:
Sorensen maintains a full inventory of replacement parts for immediate shipment.

Customers may recalibrate, troubleshoot, or repair products as described in the instruction manual without voiding the warranty providing that professional instrument maintenance is performed, and such service is within the accepted norm and practices of the electronics industry. Sorensen Company will be the final arbiter of service problem disputes.

Warranty replacement parts are available to customers at no charge.

Limited Warranty:
Sorensen Company warrants all parts of each power supply to be of sound design, good materials and workmanship, and will repair or exchange any parts proven to be defective under normal use at no charge for a period of five years from the date of shipment. Please note that MM, CM and SRM Series carry a warranty period of 2 years.

Sorensen's liability under the terms of this warranty is limited to the satisfactory repair or replacement of defective products which have not been damaged through accident, abuse, misuse, or unauthorized repair. Sorensen shall in no case be liable for any special or consequential damages of any nature.

The unused portion of this warranty is fully transferable from the original purchaser if the Sorensen product is a component of the original purchaser's product or system.

Defects will be corrected by the factory or one of our authorized field service centers throughout the world. All products returned for repair must be shipped freight prepaid and be accompanied by a Return Material Authorization. Returned freight is shipped collect.

Return Shipments:
All Sorensen products require a Return Material Authorization Number prior to shipment back to the factory. This is required for equipment ordered in error or returned for service. Contact the factory for details and return authorization. Equipment returned for service should include a description of the problem encountered and return shipping instructions. Equipment ordered incorrectly is subject to a restocking charge. Exact charges will be determined when the return authorization is issued. Power assemblies, modified standard power supplied, non-standard, obsolete, and custom built equipment may not be returned for credit.

All sales are subject to Raytheon Standard Terms and Conditions of Sale.

Sorensen Catalog Index

Section Pages

Sorensen Power Supply Engineering Information 1.1-1.15

Glossary of Terms 1.16

Warranty, 5 Year and 2 Year coverage 2.1

MODULAR POWER SUPPLIES SECTION

Selection Chart 2.2-2.3
SSD Series, High Power, Switching Power Supplies 3.1-3.4
STM Series, High Efficiency, Switching Power Supplies 3.5-3.8
SLC-B Series, Dual ac Input, Switching Power Supplies 3.9-3.12
SLT5/SLT0 Series, Low Power, Triple Output Switching Power Supplies 3.13-3.16
SRX Series, High Power Density (2.47 W per cu. in.), Switching Power Supply 3.17-3.20
SRM Series, Open Frame, Multi-Output Switching Power Supplies 3.21-3.24
PTM Series, Single and Dual Output, Linear Power Supplies 3.25-3.28
QSA Series, Wide Range Adjustable Output, Linear Power Supplies 3.29-3.32
MM Series, PC Board Mounting, Miniature Encapsulated Linear Power Supplies 3.33-3.36
CM Series, Chassis Mounting, Miniatue Encapsulated Linear Power Supplies 3.37-3.38

POWER ASSEMBLIES SECTION

Features and Options 4.1-4.2
Selection Chart/Specifications, Single Output Series (SSD, STM, PTM) 4.3-4.4
Selection Chart/Specifications, Dual and Wide Range Adjustable Ouput (PTM and QSA) 4.5
Standard Rack Sizes 4.6
System 319, (3.5" x 19" x 19.4") with various front panel options 4.7
System 519, (5.25" x 19" x 19.4") with various front panel options 4.8-4.9
System 522, (5.25" x 19" x 22.4") with various front panel options 4.10-4.11
Accessories 4.12
Rack Sub-Assemblies 4.13-4.14

POWER INSTRUMENTS SECTION

Selection Chart 2.4
SRL Series, Medium Power, Variable Programming Laboratory and Industrial Power Supplies 5.1-5.4
DCRB Series, High Power, Single Phase Input Laboratory and Industrial Power Supplies 5.5-5.10
DCRA Series, High Power, Three Phase Input Laboratory and Industrial Power Supplies 5.11-5.17
DCRA Series, Optional Equipment (ST101, RP9 Kit, CSE Kit) 5.18
QRD Series, Bench, Lab, Test and System High Speed Programmable Power Supplies 5.19-5.21
QRD Series Rack Mounting Accessories and Optional Equipment 5.22
QRL Series, High Speed Programmable, Dual Output Lab & Industrial, Linear Power Supplies 5.23-5.26
OVP Models Overvoltage Protectors for QSA and QRD Series 5.27-5.28
ACR Series, Solid State ac Line Regulator 5.29-5.32
ACR 500 Series, Rack Mounting Adapter, RP7 ..... 5.30

DIGITAL-TO-ANALOG PROGRAMMERS SECTION

488 DAP Series, Two Channel, Programmer, Interfaces to GPIB Bus per IEEE/488 ..... 6.1-6.4
RA500 Series Power Assembly (488 DAP) 6.4

General Ordering Information 7.1

Power Supply Information Request Form 7.3
Sales & Service Representatives 7.5-7.10
Price Lists .....

SORENSEN
RAYTHEON
Sorensen Company, 676 Island Pond Road, Manchester, NH 03103 USA (603) 668-4500 TWX 710-220-1339

Power Supply Information Request

☐ I would like a quotation for _____ power assembly unit(s) based on the following data:

Power Supply Requirements for Rack

No. Outputs	Voltage	Current	(Check if required)				Sorensen Model No.
			OVP	Open Sense Protection	Metered*	Volt Adj.* Controls	

*max. of 4 per rack

AC input voltage and frequency _____

Rack Size: ☐ 319 ☐ 519 ☐ 522 ☐ *other, see page 4.14 Front Panel Configuration: ☐ A ☐ B ☐ C ☐ D ☐ E
Option: ☐ Chassis Slide ☐ Line Cord

My power supply application is: _____

_____

☐ Immediate ☐ Within 6 months ☐ Undetermined _____
Please send additional information on model(s) _____

_____

Estimated number of power supplies purchased last year: ☐ none ☐ 1-50 ☐ 51-100 ☐ 101 +

I expect my power supply need to: ☐ decrease ☐ remain same ☐ increase

☐ Keep me on your mailing list. My major need is: ☐ linear ☐ switching ☐ lab ☐ OEM

Name _____ Title _____

Company _____ Division _____

Address _____

City _____ State/Country _____ Postal Code _____

Phone ( ) _____ Date _____

CUT FOLD AND MAIL

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 6609 MANCHESTER, NH

Postage will be paid by addressee:

SORENSEN

676 Island Pond Road
Manchester, NH 03103

Power Supply Information Request

☐ I would like a quotation for _____ power assembly unit(s) based on the following data:

Power Supply Requirements for Rack

No. Outputs	Voltage	Current	(Check if required) OVP	Open Sense Protection	Metered*	Volt Adj.* Controls	Sorensen Model No.

*max. of 4 per rack

AC input voltage and frequency _____

Rack Size: ☐ 319 ☐ 519 ☐ 522 ☐ *other, see page 4.14 Front Panel Configuration: ☐ A ☐ B ☐ C ☐ D ☐ E
Option: ☐ Chassis Slide ☐ Line Cord

My power supply application is: _____

_____

☐ Immediate ☐ Within 6 months ☐ Undetermined _____
Please send additional information on model(s) _____

_____

Estimated number of power supplies purchased last year: ☐ none ☐ 1-50 ☐ 51-100 ☐ 101 +

I expect my power supply need to: ☐ decrease ☐ remain same ☐ increase

☐ Keep me on your mailing list. My major need is: ☐ linear ☐ switching ☐ lab ☐ OEM

Name _____ Title _____

Company _____ Division _____

Address _____

City _____ State/Country _____ Postal Code _____

Phone ( ) _____ Date _____

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 6609 MANCHESTER, NH

Postage will be paid by addressee:

SORENSEN

676 Island Pond Road
Manchester, NH 03103

North America

Alabama
Currie, Peak & Frazier, Inc.
2317 Starmount Circle
P.O. Box 1424
Huntsville, AL 35807
Tel: 205-536-1506

Alaska
* Sorensen Company
676 Island Pond Road
Manchester, NH 03103
Tel: 603-668-4500
Twx: 710-220-1339

Arizona
Trembly Associates
2740 South Hardy Drive, Suite 3
P.O. Box 27468
Tempe, AZ 85282
Tel: 602-967-2058
Twx: 910-950-1949

Arkansas
Kemp Engineering Co., Inc.
3210 S. Norwood Ave., Suite C
Tulsa, OK 74135
Tel: 918-663-4501
Twx: 910-840-3585

California
-Northern-
* Jay Stone & Associates
339 South San Antonio Road
Los Altos, CA 94022
Tel: 415-948-4563
Twx: 910-370-6002

-Southern-
* Power Specialists Company
10601 Bloomfield Street
Los Alamitos, CA 90720
Tel: 213-594-9418
Twx: ESL102480PSILMOS

Colorado
Trembly Associates
720 Kipling Street
Suite 12
Lakewood, CO 80215
Tel: 303-233-9544
Twx: 910-931-2553

Connecticut
* Sorensen Company
676 Island Pond Road
Manchester, NH 03103
Tel: 603-668-4500
Twx: 710-220-1339

-Fairfield County-
Crane & Egert Corporation
791 Meacham Avenue
Elmont, NY 11003
Tel: 203-964-0111
Twx: 510-223-0417

Delaware
Scientific Representatives, Inc.
304 Cooper Center
Pennsauken, NJ 08109
Tel: 609-662-5222
Twx: 710-892-1297

District of Columbia
* Scientific Associates, Inc.
9512A Lee Highway
Fairfax, VA 22031
Tel: 703-385-0600
Twx: 710-833-0361

Florida
* Currie, Peak & Frazier, Inc.
6880 Lake Ellenor Drive
237 Orlando Center Park
P.O. Box 13229
Orlando, FL 32859
Tel: 305-855-0843
Twx: 810-850-0106

Georgia
Currie, Peak & Frazier, Inc.
3418 Glentree Court
Duluth, GA 30136
Tel: 404-476-3107
or: 205-536-1506

Hawaii
Power Specialists Company
10601 Bloomfield Street
Los Alamitos, CA 90720
Tel: 213-594-9418
Twx: ESL102480PSILMOS

Idaho
Trembly Associates
1341 South State Street
Suite D
Salt Lake City, UT 84115
Tel: 801-486-5292

Illinois
-Northern-
* Dytec/Central, Inc.
315 West University Drive
Arlington Heights, IL 60004
Tel: 312-394-3380
Twx: 910-687-2267

-Southern-
* ENSCO-REP, INC.
7 Mill Park Court
Maryland Heights, MO 63043
Tel: 314-423-3935
Twx: 910-764-0856

Indiana
Dytec/Central, Inc.
25 Beachway Drive
Indianapolis, IN 46224
Tel: 317-247-1316

Iowa
-Northern-
* Dytec/Central, Inc.
315 West University Drive
Arlington Heights, IL 60004
Tel: 312-394-3380
Twx: 910-687-2267

-Southern-
* ENSCO—REP, INC.
7 Mill Park Court
Maryland Heights, MO 63043
Tel: 314-423-3935
Twx: 910-764-0856

Kansas
-Eastern-
ENSCO-REP, INC.
7939 Floyd Avenue
Overland Park, KS 66204
Tel: 913-381-7557
Twx: 910-749-4066

-Western-
ENSCO-REP, INC.
1251 South Longfellow
Wichita, KS 67207
Tel: 316-683-1070

Kentucky
Dytec/Central, Inc.
25 Beachway Drive
Indianapolis, IN 46224
Tel: 317-247-1316

* Main Office

Sales Representatives

North America

Louisiana
Kemp Engineering Co., Inc.
218 Rue Beauregard
Suite G
Lafayette, LA 70508
Tel: 318-269-9452

Maine
* Sorensen Company
676 Island Pond Road
Manchester, NH 03103
Tel: 603-668-4500
Twx: 710-220-1339

Maryland
Scientific Associates, Inc.
10916 York Road
Cockeysville, MD 21030
Tel: 301-321-1411
Twx: 710-833-0361

Massachusetts
* Sorensen Company
676 Island Pond Road
Manchester, NH 03103
Tel: 603-668-4500
Twx: 710-220-1339

Michigan
Comtel Instruments Co.
21223 Hilltop Street
P.O. Box 5034
Southfield, MI 48037
Tel: 313-358-2505
Tlx: 23-0555

Minnesota
* International Electronics, Inc.
2500 39th Avenue, North East
Minneapolis, MN 55421
Tel: 612-571-0000

Mississippi
Currie, Peak & Frazier, Inc.
2317 Starmount Circle
P.O. Box 1424
Huntsville, AL 35807
Tel: 205-536-1506

Missouri
-Eastern-
* ENSCO-REP, INC.
7 Mill Park Court
Maryland Heights, MO 63043
Tel: 314-423-3935
Twx: 910-764-0856

-Western-
ENSCO-REP, INC.
7939 Floyd Avenue
Overland Park, KS 66204
Tel: 913-381-7557
Twx: 910-749-4066

Montana
Trembly Associates
1341 South State Street
Suite D
Salt Lake City, UT 84115
Tel: 801-486-5292

Nebraska
ENSCO-REP, INC.
2615 West Central Park
Davenport, IA 52804
Tel: 319-386-6600

Nevada
-Northern-
* Jay Stone & Associates
339 South San Antonio Road
Los Altos, CA 94022
Tel: 415-948-4563
Twx: 910-370-6002

-Southern-
Trembly Associates
1555 East Flamingo Road
Suite 258
Las Vegas, NV 89109
Tel: 702-369-8700
Twx: 684-402

New Hampshire
* Sorensen Company
676 Island Pond Road
Manchester, NH 03103
Tel: 603-668-4500
Twx: 710-220-1339

New Jersey
-Northern-
* Crane & Egert Corporation
791 Meacham Avenue
Elmont, NY 11003
Tel: 516-872-0800
Twx: 510-223-0417

-Southern-
Scientific Representatives, Inc.
304 Cooper Center
Pennsauken, NJ 08109
Tel: 609-662-5222
Twx: 910-989-1639

New Mexico
* Trembly Associates
119 Quincy N.E.
Albuquerque, NM 87108
Tel: 505-266-8616
Twx: 910-989-1639

New York
-Metropolitan-
* Crane & Egert Corporation
791 Meacham Avenue
Elmont, NY 11003
Tel: 516-872-0800
Twx: 510-223-0417

-Eastern-
TAE-REP, INC.
15 Salem Road
Fishkill, NY 12524
Tel: 914-896-6966

-Central-
* TAE-REP INC.
209 Court Street
P.O. Box 597
Binghamton, NY 13902
Tel: 607-772-9265

-Western-
TAE-REP INC.
320 North Washington Street
Rochester, NY 14625
Tel: 716-586-8710

North Carolina
Currie, Peak & Frazier, Inc.
1212 Grove Street
P.O. Box 5588
Greensboro, NC 27403
Tel: 919-373-0380/273-3040

North Dakota
* International Electronics, Inc.
2500 39th Avenue, North East
Minneapolis, MN 55421
Tel: 612-571-0000

Ohio
-Northern-
* Comtel Instruments Co.
5387 Avion Park Drive
P.O. Box 43259
Cleveland, OH 44143
Tel: 216-442-8080
Tlx: 98-0444

* Main Office

North America

-Central-
Comtel Instruments Co.
Kettering P.O. Box 2036
1717 Big Hill Road A6
Dayton, OH 45439
Tel: 513-298-7573

-Southern-
Comtel Instruments Co.
5006 Cemetery Road
Hilliard, OH 43026
Tel: 614-876-8305

Oklahoma
Kemp Engineering Co., Inc.
3210 South Norwood, Suite C
Tulsa, OK 74135
Tel: 918-663-4501
Twx: 910-840-3585

Oregon
Industrial Electronic
Instruments Co.
19707 44th Avenue, West
Lynnwood, WA 98036
Tel: 206-775-3516
503-220-0551

Pennsylvania
-Western-
Comtel Instruments Co.
9 Parkway Center
Pittsburgh, PA 15220
Tel: 412-922-5720

-Eastern-
Scientific Representatives, Inc.
304 Cooper Center
Pennsauken, NJ 08109
Tel: 609-662-5222
Twx: 710-892-1297

Puerto Rico
* Currie, Peak & Frazier, Inc.
P.O. Box 13229
Orlando, FL 32859
Tel: 305-855-0843/0930
Twx: 810-850-0106

Rhode Island
* Sorensen Company
676 Island Pond Road
Manchester, NH 03103
Tel: 603-668-4500
Twx: 710-220-1339

South Carolina
Currie, Peak & Frazier, Inc.
332 South Shields Road
Columbia, SC 29204
Tel: 803-254-1971

South Dakota
* International Electronic, Inc.
2500 39th Avenue, North East
Minneapolis, MN 55421
Tel: 612-571-0000

Tennessee
Currie, Peak & Frazier, Inc.
Castile Apartments P8
1199 Murfreesboro Road
Nashville, TN 37217
Tel: 615-366-4009
205-536-1506

Texas
-Northern-
* Kemp Engineering Co., Inc.
P.O. Box 172
16420 Addison Road
Addison, TX 75001
Tel: 214-931-7100
Twx: 910-860-5149

-Southern-
Kemp Engineering Co., Inc.
13738 FM-529
Houston, TX 77041
Tel: 713-466-1465
Twx: 910-881-5532

-Western-
Trembly Associates
(Albuquerque)
El Paso, TX
Tel: 915-533-9380
Twx: 910-989-1639

Utah
Trembly Associates
1341 South State Street
Suite D
Salt Lake City, UT 84115
Tel: 801-486-5292

Vermont
* Sorensen Company
676 Island Pond Road
Manchester, NH 03103
Tel: 603-668-4500
Twx: 710-220-1339

Virginia
* Scientific Associates, Inc.
9512A Lee Highway
Fairfax, VA 22031
Tel: 703-385-0600
Twx: 710-883-0361

Washington
* Industrial Electronic
Instruments Co.
19707 44th Avenue, West
Lynnwood, WA 98036
Tel: 206-775-3516

West Virginia
-Central-
Comtel Instruments Co.
9 Parkway Center
Pittsburgh, PA 15220
Tel: 412-922-5720

-Eastern-
* Scientific Associations, Inc.
9512A Lee Highway
Fairfax, VA 22031
Tel: 703-385-0600
Twx: 710-833-0361

Wisconsin
-Western-
* International Electronics, Inc.
2500 39th Avenue, North East
Minneapolis, MN 55421
Tel: 612-571-0000

-Eastern-
* Dytec/Central, Inc.
315 West University Drive
Arlington Heights, IL 60004
Tel: 312-394-3380
Twx: 910-687-2267

Wyoming
Trembly Associates
720 Kipling Street
Suite 12
Lakewood, CO 80215
Tel: 303-233-9544
Twx: 910-931-2553

* Main Office

Sales Representatives

Canada

Ontario
* Haltronics, Ltd.
355 Iroquois Shore Road
Oakville, ON L6H 1M3
Tel: 416-844-2121

Ottawa & Eastern Ontario Regions
Haltronics, Ltd.
1510 Merivale Road, #4
Ottawa, ON K2G 3J6
Tel: 613-226-2121

Quebec & Maritime Provinces
Haltronics, Ltd.
6600 Trans Canada Highway
Suite 750
Pointe Claire, PQ H9R 4S2
Tel: 514-696-2121

Western Canada
Haltronics, Ltd.
205 Ninth Avenue, South East
Suite 300
Calgary, AB T2G 0P8
Tel: 403-264-2121

Mexico

Ex-Im Mexicanna, S.A.
Apartado P.O. Box 32-1003
Reforma 95-704
Mexico 4 DF
Tel: 564-7728
254-3627

International

Austria
See West Germany

Australia
Hawker Pacific Pty-Ltd.
4 Harley Crescent
Condell Park NSW 2200
P.O. Box 172
Yagoona NSW 2199
Tel: (02) 708-8555
Tlx: AA21168

Belgium
Antwerp Marine Radio Cy
Paardenmarkt 87
2000 Antwerpen
Tel: 32-31-337780/310487
Tlx: 31734 AMRC B

Denmark
Aage Hempel International A/S
Havnegade 39
DK-1058 Copenhagen K
Tel: (451) 126767
Tlx: 15231 HEMPEL DK

England/Scotland/Wales
The House of Power
Electron House
Cray Avenue
Orpington, Kent
BR5 3QJ England
Tel: 689 71531/7
Tlx: 896141 CRALEC G

Finland
INTO OY
P.O. Box 22
SF-00661 Helsinki 66
Tel: (90) 742-133
Tlx: 121836 INTO SF

France
GISCO s.a.r.l.
40-42 Rue Mirabeau
94200 Irvy-Sur Seine
Tel: 33-1-670-11-58
Tlx: GISCO 204702 F

Netherlands
Nijkerk Systems B.V.
Drentestraat 7
1083 HK Amsterdam
Tel: (020) 42-89-33
Tlx: 11625 NESCO NL

India
Radiosound
42, Canady Bridge
Bombay 400 004
Tel: 353997 - 366127
Cable: LOUDTONE
Girgeon, Bombay

Israel
Agentex Ltd.
ATIDIM
Scientific Industries Park
End of Divora Hanevia Road
P.O. Box 10150
Tel Aviv 61101
Tel: 03-493111
Tlx: 341186 AGEN IL
Cable: AGENTEX TELAVIV

Italy
3G Electronics S.R.L.
Via Perugino 9
20135 Milano
Tel: (02) 5455951
Tlx: 321024
Cable: TREGELEC

Japan
Kansai Electronics Co. Ltd.
4-12 Toganocho, Kitaku
Osaka 530
Tel: 6-44188 21
Tlx: 5233855 KELECO J

New Zealand
Southern Communications Ltd.
P.O. Box 222092
137 Station Road
Otahuhu
Auckland
Tel: 2766176/2767270
Tlx: NZ21474

Portugal
Equipamentos de Laboratorio, Ltd.
P.O. Box 1.100
1002 Lisbon
Tel: 019197 6551
Tlx: 12702 EQILAB

South Africa
Aerosignals M&M Pty Ltd.
P.O. Box 94
Johannesburg
Tel: 27-11-836-6828/9
Cable: AEROSIGNALS
JOHANNESBURG

Sweden
Magnetic Ab
Box 20036
S-16120 Bromma
Stockholm
Tel: 08-29 04 60
Tlx: 19037 MAGNET S

* Main Office

International

Sweden (continued)

Magnetic Ab
Klangfaergsgatan 5
S-421 42 Vaestra Froelunda
Gothenburg
Tel: 031-29 55 57
Tlx: via Stockholm office

Taiwan
MacKarl and Co.
P.O. Box 1226
8th Floor Chung-Teh Bldg.
25, Nanking E. Road, Sec. 3
Taipei
Tel: 5215325-9
Tlx: 23419 MACKARL

Uruguay
See Argentina

U.S.A.
Worldwide Company
Raytheon Company
International Affairs
141 Spring Street
Lexington, MA 02173 U.S.A.
Tel: 617-862-6600
Tlx: 923331 RAY ICS WHA

Venezuela
Telecon Cientifica C-H.
Apartado de Correos 60013
Caracas, 1070
Tel: 239 12 11
Tlx: 25288 TELCON CA

West Germany/Austria
Neumueller GmbH
Eschenstrasse 2
8021 Taufkirchen/Muenchen
W. Germany
Tel: 089 612-1563
Tlx: 522106 NEUM D

North America

Alabama
B & C Instruments, Inc.
7920 Unit 5, Charlotte Drive
Huntsville, AL 35802
Tel: 205-883-6530-

Arizona
* General Electric
Instrumentation Service
3840 W. Clarendon Street
Phoenix, AZ 85019
Tel: 602-278-8515

General Electric
Instrumentation Service
1401 East Valencia Road
Tuscon, AZ 85706
Tel: 602-294-3139

California
J.D. & Associates
1012 Morse Avenue
Suite 6
Sunnyvale, CA 94086
Tel: 408-734-5529

Power Specialist Co.
10601 Bloomfield Street
Los Alamitos, CA 90720
Tel: 213-594-9418

Colorado
General Electric Company
Instrumentation and
Communication
Equipment Service
3770 Paris Street Unit #3
Denver, CO 80239
Tel: 303-320-3250

Illinois
J.H. Metrology Co., Inc.
1801 Hicks Road Unit F
Rolling Meadows, IL 60008
Tel: 312-991-0290

Maryland
Applied Metrology Inc.
10067 N. 2nd Street
Laurel, MD 20810
Tel: 301-953-1010

Michigan
Comtel Standards Laboratory
21223 Hilltop Street
P.O. Box 5034
Southfield, MI 48037
Tel: 313-358-2500

Minnesota
* Instrumentation Services, Inc.
957 Winnetka Avenue, North
Minneapolis, MN 55427
Tel: 612-544-8916
Tlx: 29-0101

Missouri
Industrial Service Laboratories
4354 Olive Street
St. Louis, MO 63108
MO Tel: 314-535-5760
For states contiguous to
Missouri: 1-800-325-8653

* Main Office

(continued)

Worldwide Service Representatives

North America

New Hampshire
* Sorensen Company
676 Island Pond Road
Manchester, NH 03103
Tel: 603-668-4500

New Jersey
Ampower Electronic
Instrument Co., Inc.
26 Just Road
Fairfield, NJ 07006
Tel: 201-227-7720

New Mexico
Instrument Service Laboratories
630 Haines Avenue N.W.
Albuquerque, NM 87102
Tel: 505-842-1107

Ohio
Comtel Instrument Company
5827 Mayfield Road
Cleveland, OH 44124
Tel: 216-442-8080

Texas
Certified Test Equipment Sales, Inc.
601 Easy Street
Garland, TX 75042
Tel: 214-494-3446

Washington
XTEK Corporation
14824 Northeast 31st Circle
Redmond, WA 98052
Tel: 206-885-6969

Canada

Brunelle Instrument Company
826 Belvedere Street
Sherbrooke, P.Q., J1H 4B8
Tel: 819-569-1408
Tlx: 05-836266 BRUNELLE SHB

International

Australia
Hawker Pacific Pty. Ltd.
Advanced Products Div.
7 Rachael Close
Silverwater, N.S.W. 2141
Tel: (02) 648-3555
Tlx: AA 73648

England
Cossor Electronics Lt.d
Service Division
The Pinnacles, Harlow
Essex CM19 5BB
Tel: 0279-26862
Tlx: 81228 COSSOR G
Cable: COSSOR HARLOW

Israel
Agentex Ltd.
ATIDIM
Scientific Industries Park
End of Dvora Hanevia Road
P.O. Box 10150
Tel Aviv 61101
Tel: 03-49311
Tlx: 341186 AGEN IL
Cable: AGENTEX TELAVIV

Italy
3G Electronics S.R.L.
Via Perugino 9
20135 Milano
Tel: (02) 5455951
Tlx: 321024
Cable: TREGELEC

West Germany/Austria
Neumueller GmbH
Eschenstrasse 2
8021 Taufkirchen/Muenchen
W. Germany
Tel: 089 612-1563
Tlx: 522106 NEUM D

NOTES

NOTES

RAYTHEON

www.manualsplus.com

1027848

SORENSEN

Sorensen Company • 676 Island Pond Road, Manchester, N.H. 03103 • Tel 603-668-4500 • TWX 710-220-1339